







BENEITO FAURE

passion for led light

passion
for
led light

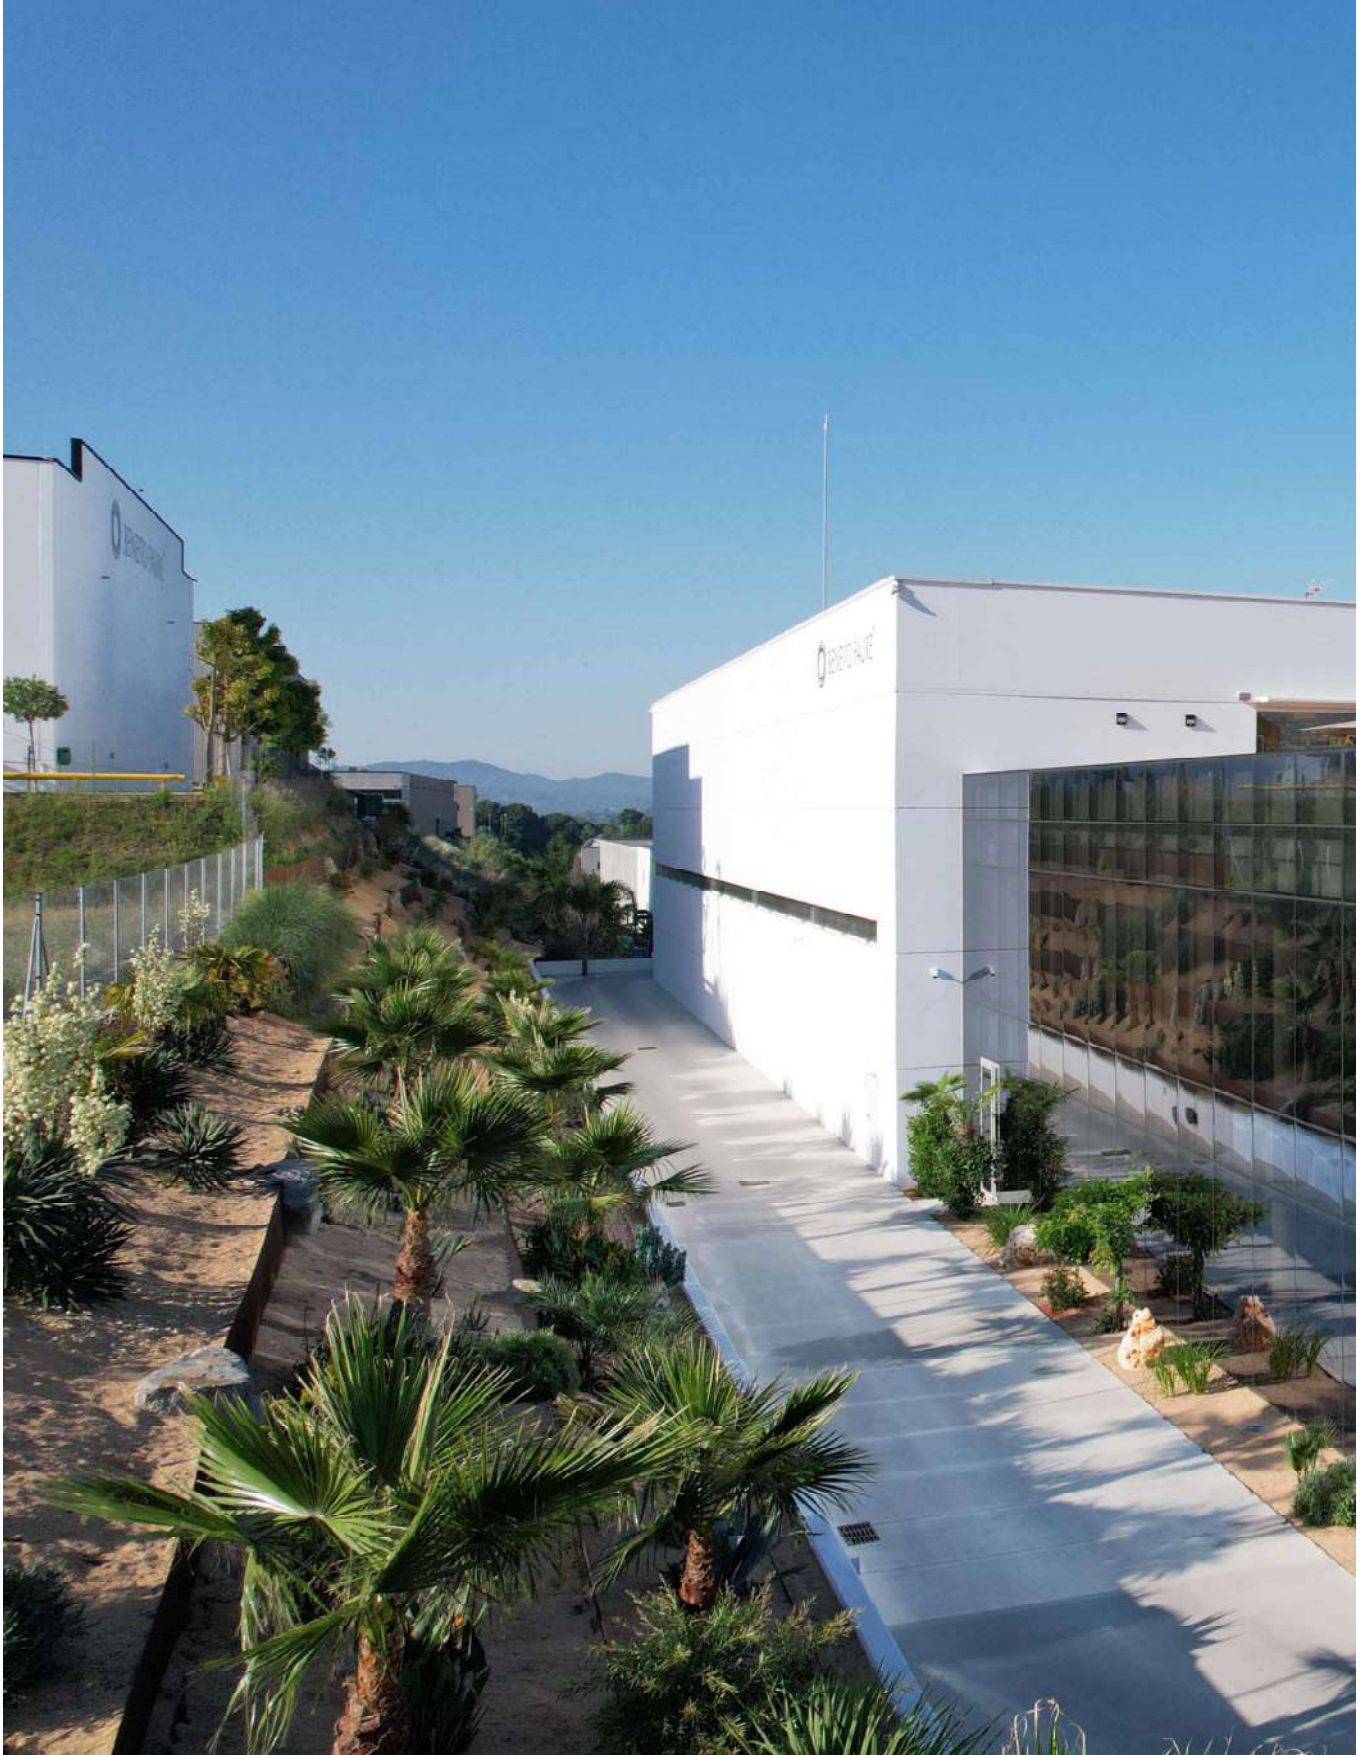

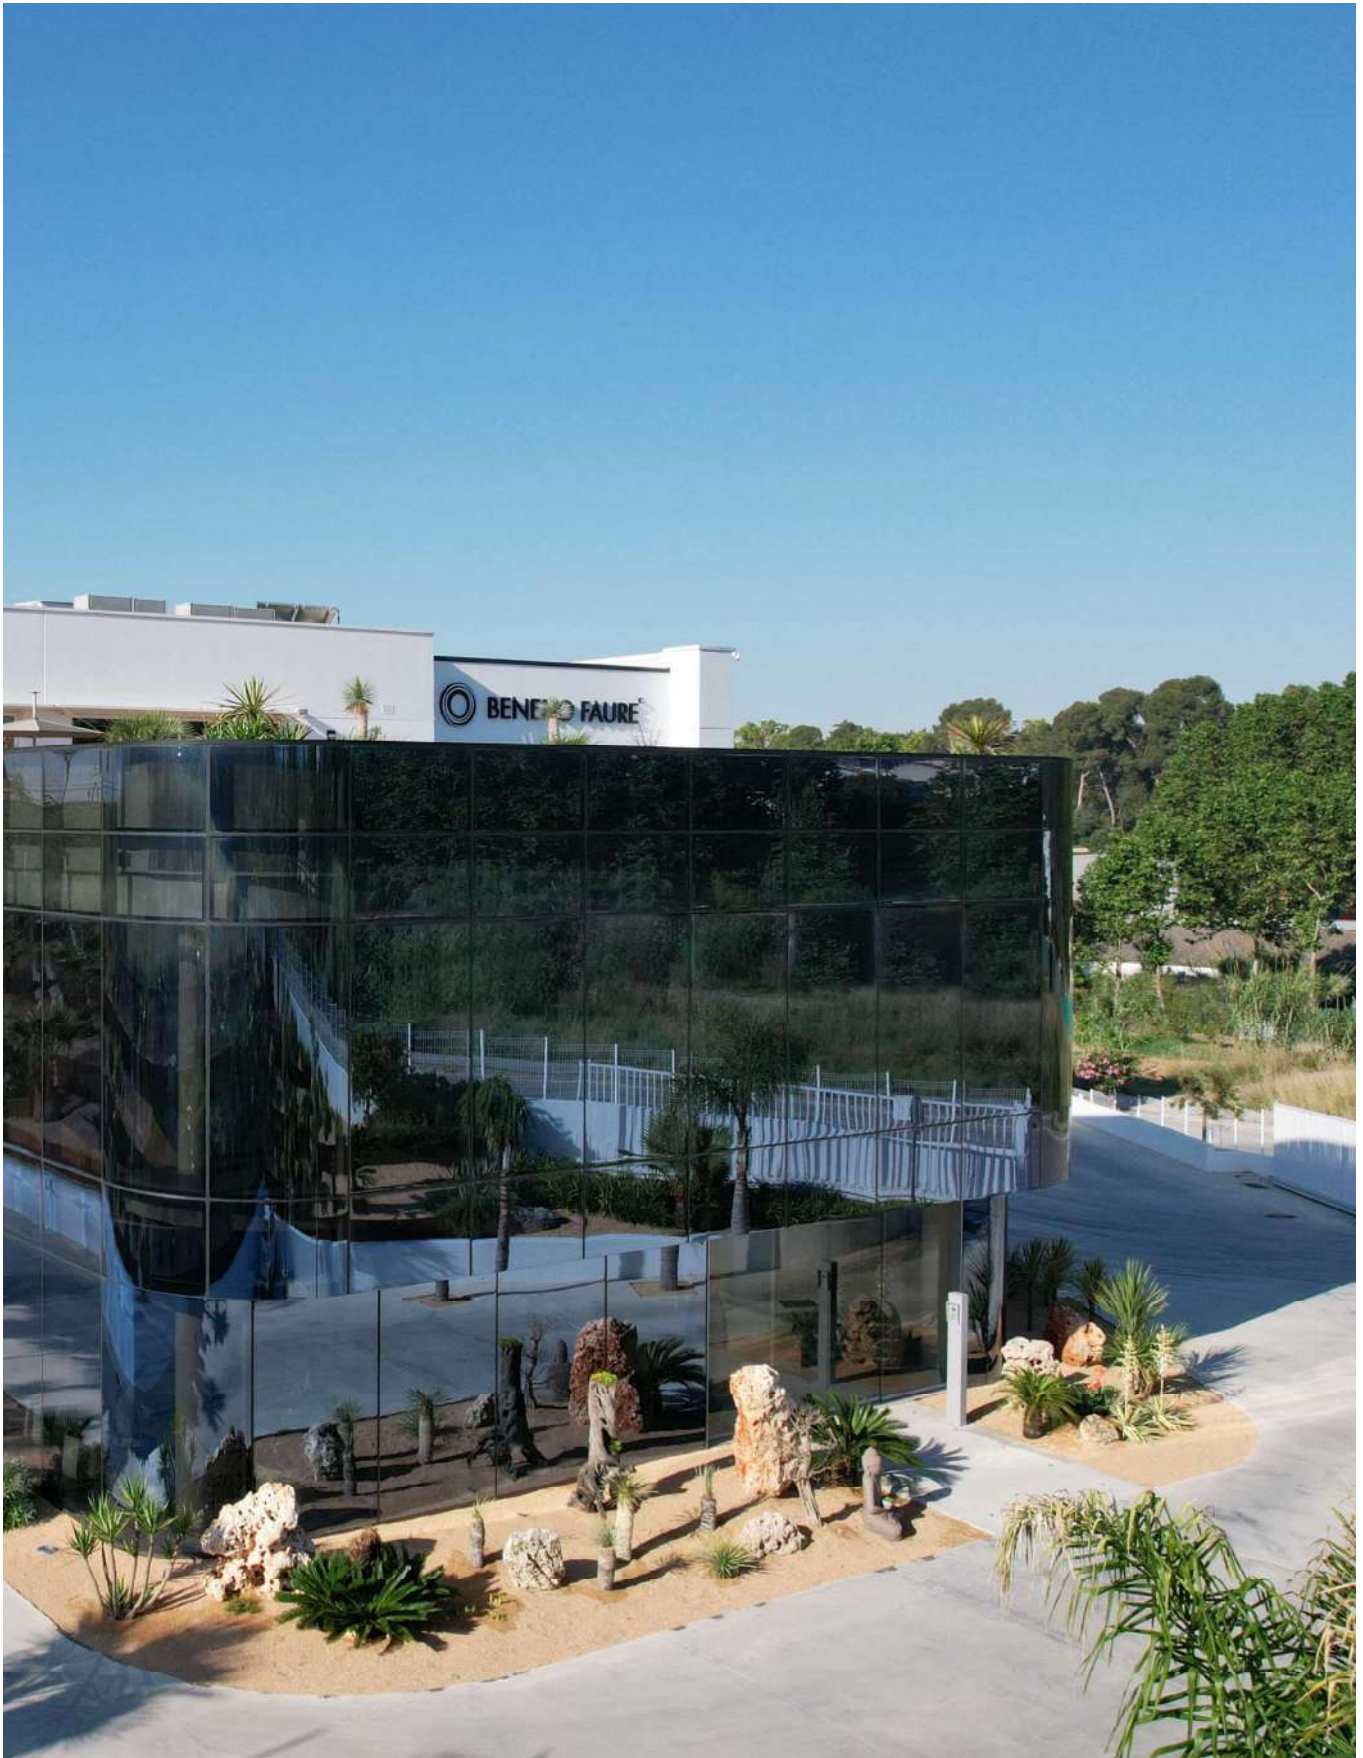

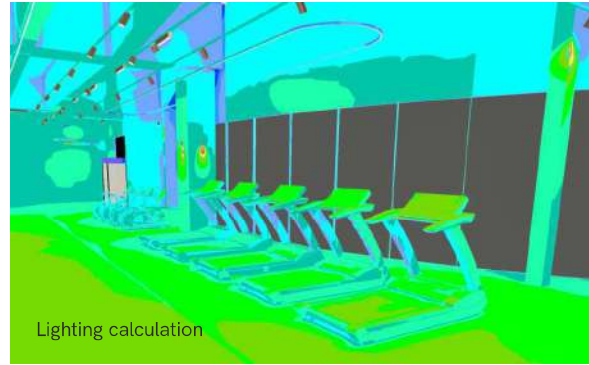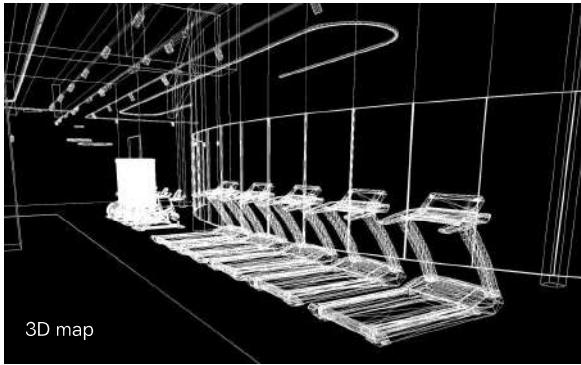

Projects



Our project department offers a wide range of services focused on providing lighting solutions that are not only aesthetically appealing, but also improve people's quality of life and comply with current regulations. Below we describe the key services that our project department can offer:

- Custom lighting design: Our team of highly skilled lighting designers works closely with costumers to create lighting solutions tailored to their specific needs. We strive to understand the unique characteristics of each project and design lighting systems that enhance the aesthetics, functionality, and comfort of the space.
- Human-centered lighting: We recognize the importance of lighting on people's health and well-being. Our designs take into account factors such as circadian cycle, visual fatigue and ergonomics to ensure that lighting contributes positively to the environment and people's performance.
- Energy efficiency: We are introducing practices and products that increasingly fit within the parameters of sustainability. We believe in creating and distributing LED products that fit within a circular economy in order to minimize waste and have a more sustainable and durable planet, always adding value to each lighting project. We are committed to designing lighting systems that are highly energy efficient. This not only reduces operating costs, but also contributes to environmental sustainability. Our designs incorporate cutting-edge LED lighting technologies and intelligent control systems.
- Regulations: Our team is highly trained in current regulations and standards in the field of lighting. We ensure that all our designs comply with local and national standards, guaranteeing the safety and legal compliance of each project.
- Technical advice in the choice of products and during product installation.

Our project department offers solutions that improve people's quality of life, comply with regulations and stand out for their innovative design. If you are looking for a reliable partner for your next lighting project, do not hesitate to contact us. We are ready to bring your lighting ideas and needs to life.

If you are looking for a reliable partner for your next lighting project, feel free to contact us. We are ready to bring your ideas and lighting needs to life.

On the left is one of our latest interior lighting projects for the FITSEVENELEVEN® Club at Frankfurt Airport.

Nuestro departamento de proyectos ofrece una amplia gama de servicios enfocados en proporcionar soluciones de iluminación que no solo sean estéticamente atractivas, sino que también mejoren la calidad de vida de las personas y cumplan con las regulaciones vigentes.

A continuación, describiremos los servicios clave que nuestro departamento de proyectos puede ofrecer:

- Diseño de iluminación personalizado: Nuestro equipo de diseñadores de iluminación altamente capacitado trabaja en estrecha colaboración con los clientes para crear soluciones de iluminación adaptadas a sus necesidades específicas. Nos esforzamos por comprender las características únicas de cada proyecto y diseñar sistemas de iluminación que realcen la estética, la funcionalidad y la comodidad del espacio.
- Iluminación centrada en el ser humano: Reconocemos la importancia de la iluminación en la salud y el bienestar de las personas. Nuestros diseños tienen en cuenta factores como el ciclo circadiano, la fatiga visual y la ergonomía para garantizar que la iluminación contribuya positivamente al entorno y al rendimiento de las personas.
- Eficiencia energética: Estamos introduciendo prácticas y productos que se ajustan, cada vez más, dentro de los parámetros de la sostenibilidad. Creemos en la creación y distribución de productos LED que encajen dentro de una economía circular para poder minimizar los residuos y tener un planeta más sostenible y duradero, siempre añadiendo valor a cada proyecto de iluminación. Nos comprometemos a diseñar sistemas de iluminación que sean altamente eficientes desde el punto de vista energético. Esto no solo reduce los costos operativos, sino que también contribuye a la sostenibilidad ambiental. Nuestros diseños incorporan tecnologías de iluminación LED de vanguardia y sistemas de control inteligente.
- Normativa: Nuestro equipo está altamente capacitado en las regulaciones y normativas vigentes en el campo de la iluminación. Nos aseguramos de que todos nuestros diseños cumplan con los estándares locales y nacionales, garantizando así la seguridad y el cumplimiento legal de cada proyecto.
- Asesoramiento técnico en la elección de los productos y durante la instalación de los mismos.

Nuestro departamento de proyectos ofrece soluciones que mejoran la calidad de vida de las personas, cumplen con las normativas y destacan por su diseño innovador. Si está buscando un socio de confianza para su próximo proyecto de iluminación, no dude en ponerse en contacto con nosotros. Estamos listos para dar vida a sus ideas y necesidades de iluminación.

A la izquierda se muestra uno de nuestros últimos proyectos de iluminación interior el Club FITSEVENELEVEN® en el Aeropuerto de Frankfurt.

Symbology



Installation.
Instalación.



Tuya protocol.
Protocolo Tuya.



Dali protocol.
Protocolo Dali.



Push.
Pulsador.



TRIAC Dimmable.
Regulable por TRIAC.



Made to measure strip LED cutting.
Corte de tiras LED a medida.



Saline-alkali resistance.
Resistencia a los álcalis salinos.



Corrosion resisting.
Resistencia a la corrosión.



Customizable color.
Color personalizable.



Acoustic absorption.
Absorción acústica.



Recycled materials.
Materiales reciclados.



Supported weight.
Peso soportado.



Color temperature selector.
Selector de temperatura de color.



Color rendering index.
Índice de reproducción cromática.



Beam Angle.
Ángulo de apertura.



Power Factor.
Factor de Potencia.



Surface luminaire not suitable for mounting on flammable surfaces.
Luminaria de superficie no adecuada para montaje en superficies inflamables.



Casambi protocol.
Protocolo Casambi.



Need Tuya Smart App to work.
Necesita aplicación Tuya Smart para funcionar.



Dali 2 protocol.
Protocolo Dali 2.



Radio frequency.
Radio frecuencia.



3 light intensities.
3 intensidades luminosas.



Customized cutting and handling.
Corte y manipulación personalizado.



Anti-UV.
Anti-UV.



Type of aluminium.
Tipo de aluminio.



Maximum Power.
Potencia Máxima.



Fire resistance.
Resistente al fuego.



100% Polyethylene Terephthalate.
100% Tereftalato de polietileno.



Glare rating.
Indice de deslumbramiento.



Power selector.
Selector de potencia.



Water and dust protection.
Resistencia al agua y al polvo.



Light 360°.
Luz 360°.



Voltage.
Tensión de entrada.



Recessed luminaire not suitable for mounting on flammable surfaces.
Luminaria empotrada no adecuada para montaje en superficies inflamables.



Do not cover.
No cubrir.



Warranty.
Años de garantía.



Lifetime.
Horas de vida.



Hertz.
Hercios.



Class II.
Clase II.



Cable length.
Longitud del cable.



Surge protection.
Protección contra sobretensiones.



Impact resistance.
Resistencia a los impactos.



Touch control.
Control táctil.



Battery autonomy.
Autonomía de la batería.



Charging time with electricity.
Tiempo de carga con corriente.



Motion sensor.
Detector de movimiento.



Distance sensor.
Distancia de detección.



Suitable for closed luminaires.
Apta para luminarias cerradas.



Units per box (min-max).
Unidades por caja.



Electronic waste.
Residuos electrónicos.



Replace cracked protection shield.
Sustituir pantalla de protección con fisuras.



Class I.
Clase I.



Class III.
Clase III.



Supported weight.
Peso soportado.



Operating Temperature.
Temperatura de trabajo.



Ground slope.
Inclinación del suelo.



Anti corrosive marine paint.
Pintura anticorrosión marina.



Wireless charging.
Carga inalámbrica.



Battery capacity.
Capacidad de la batería.



Charging time with sun.
Tiempo de carga con sol.



Crepuscular sensor.
Sensor crepuscular.



Gravity sensor.
Sensor gravitatorio.



Adjustable operating time.
Tiempo de encendido regulable.



EMC anti-interference certification.
Certificación anti interferencias EMC.





Restriction of Hazardous Substances.
Restricción de sustancias peligrosas.



European conformity.
Conformidad Europea.



Smart home solution

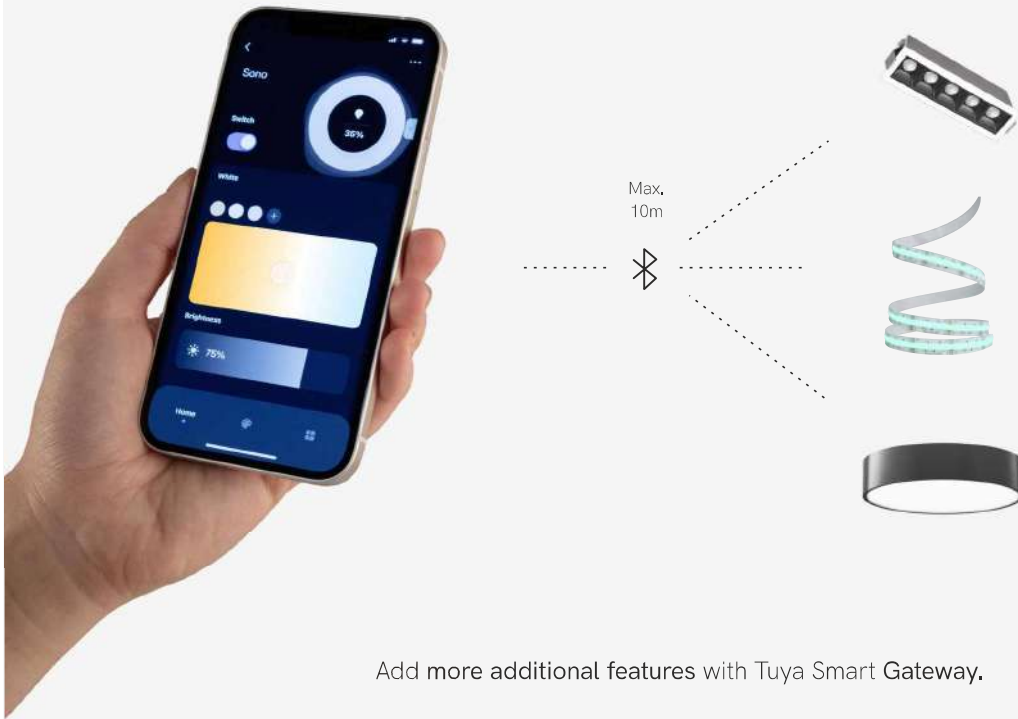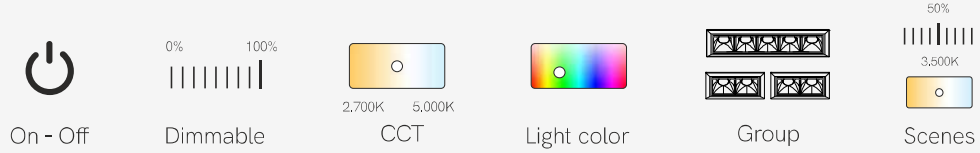

Add more additional features with Tuya Smart Gateway.




Schedule day and time




Control from anywhere via internet



Voice control with Alexa





Voice control with Google Home

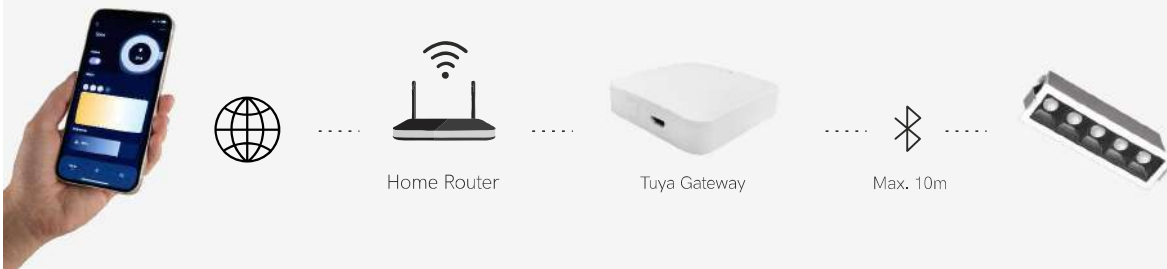

All products with Tuya logo can have these functions.

CASAMBI

Professional solution

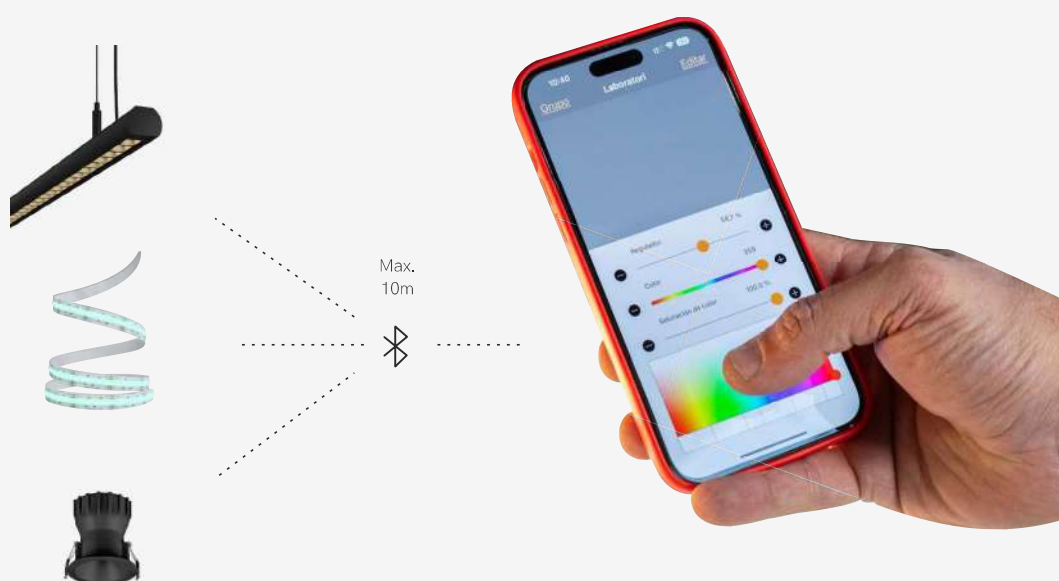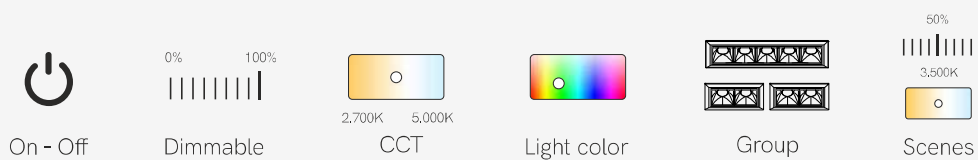

Add more additional features with Casambi Smart Gateway.



All products with Casambi logo can have these functions.


Sampling & Display Stand

Discover our selection of exhibitors designed by Beneito Faure to present and explain our products to our customers in a simple and interactive way, being able to appreciate the materials, the different applications and their lighting effects.

Each exhibitor is designed to communicate in the most effective way the characteristics and benefits of our products.

Contact our sales department to order your exhibitor.

Led strip book

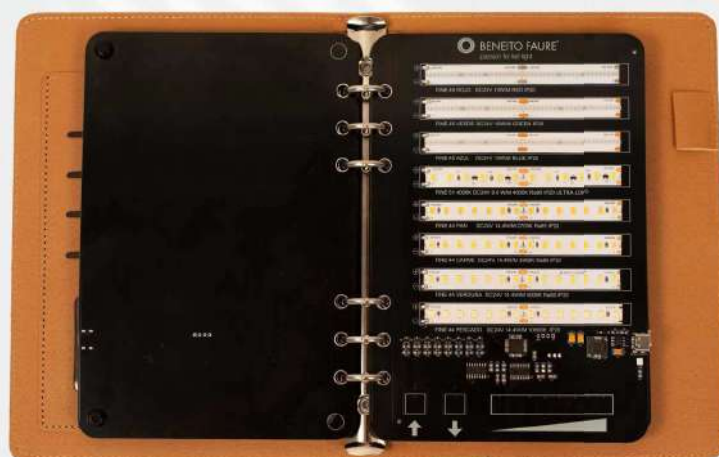

(37x3,5x23,5cm)



Descubre nuestra selección de expositores diseñados por Beneito Faure para ayudar a nuestros clientes a dar a conocer y explicar nuestros productos de una forma sencilla e interactiva, pudiendo apreciar los materiales, las diferentes aplicaciones y los efectos lumínicos de los mismos.

Cada expositor está pensado para comunicar de la manera más eficaz las características y beneficios de nuestros productos.

Ponte en contacto con nuestro departamento comercial para pedir tu expositor.

Led strip briefcase



(42x15x35cm)


Sampling & Display Stand



(64x40x174cm) / (64x40x213cm) with 2m profiles



Led strips and profiles
2nd display

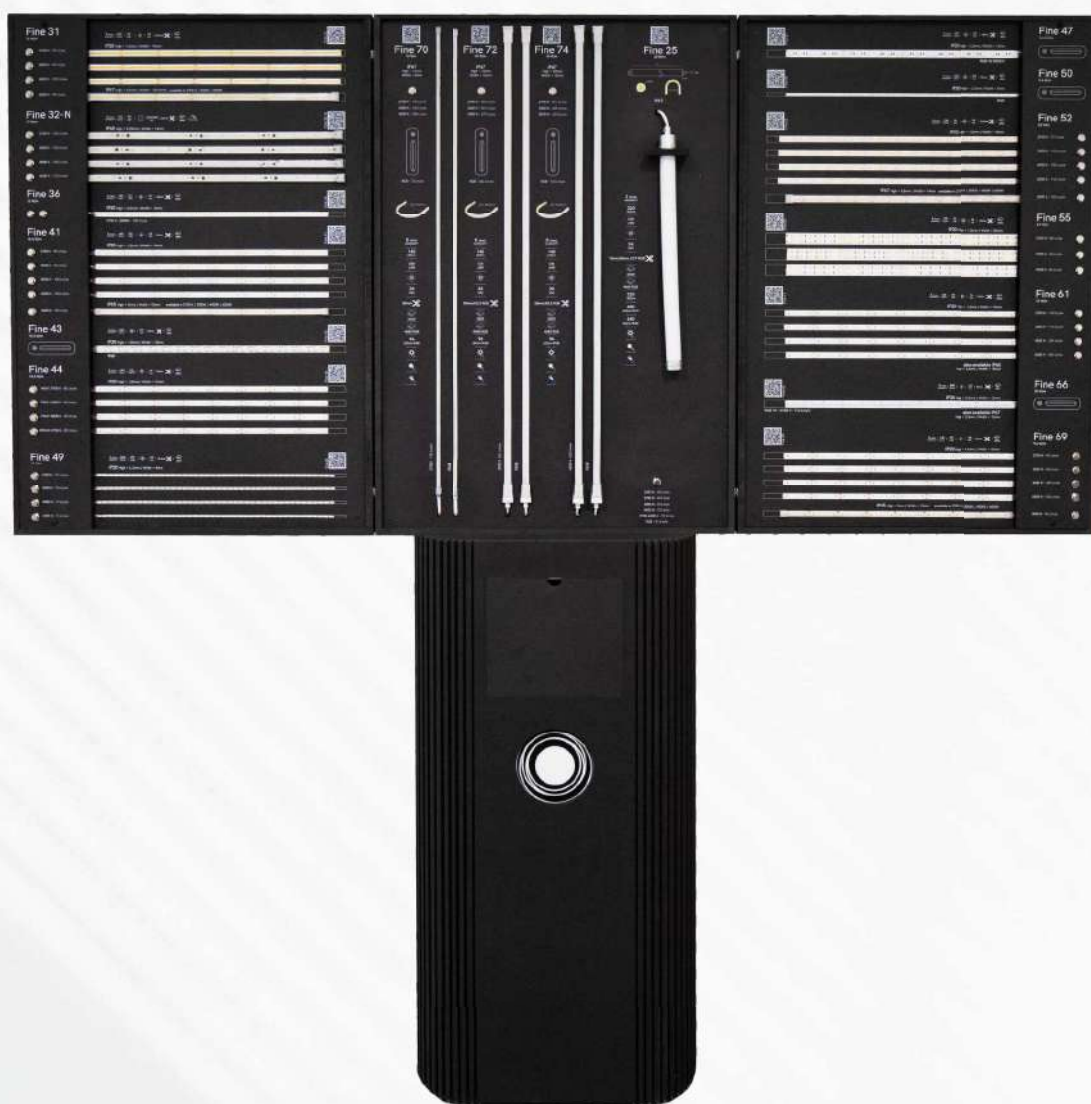

(197x45x197cm)

Sampling & Display Stand

Technical and decorative display
side A



Touch panel



(110x38x200cm)




Technical and decorative display
side B



HUMAN CENTRIC LIGHTING

One CCT foreach activity

Un CCT en cada actividad de tu día

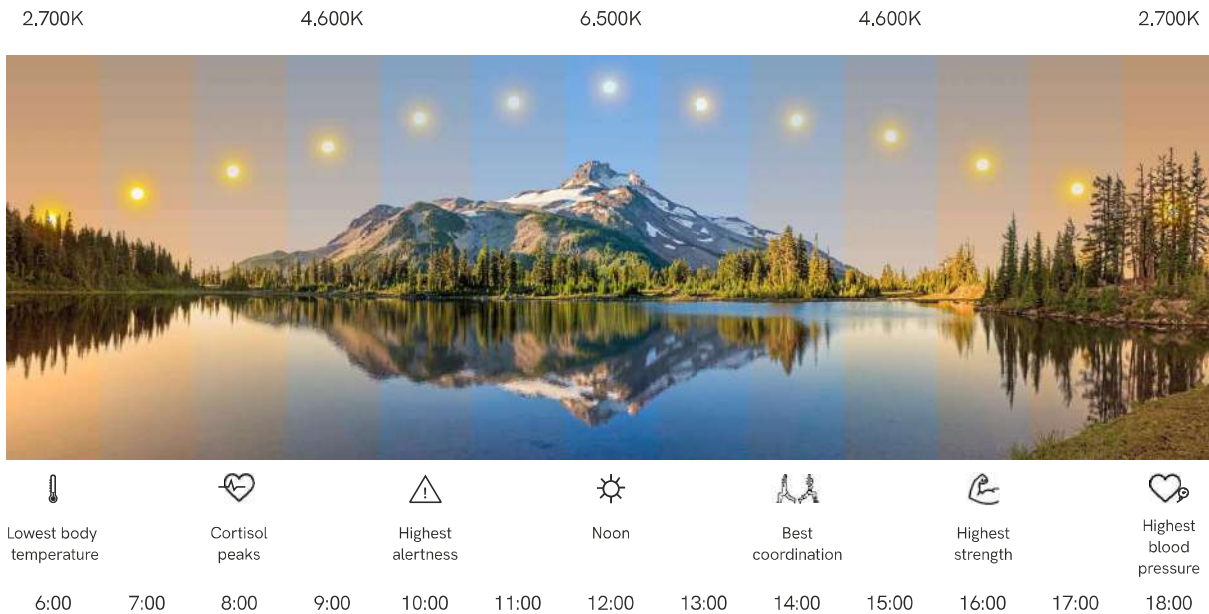

CCT is the color appearance that a light source emits compared to a CIE standard. It is measured in degrees Kelvin (K). The warmest lights have the lowest values and the coldest ones the highest. Our CCTs range from 2200K to 6000K.


You can create and modify lighting scenes, change light intensity, and choose from a great variety of CCTs. With CASAMBI control, for example, you can create lighting based on the circadian circle.

El CCT es el aspecto cromático que emite una fuente de luz en comparación con un estándar CIE. Se mide en grados Kelvin (K). Las luces más cálidas tienen los valores más bajos y las más frías los más altos. Nuestros CCT van de 2.200K a 6.000K.

Puede crear y modificar escenas de iluminación, cambiar la intensidad de la luz y elegir entre una gran variedad de CCT. Con el control CASAMBI, por ejemplo, puede crear una iluminación basada en el círculo circadiano.

Light quality

Calidad de la luz

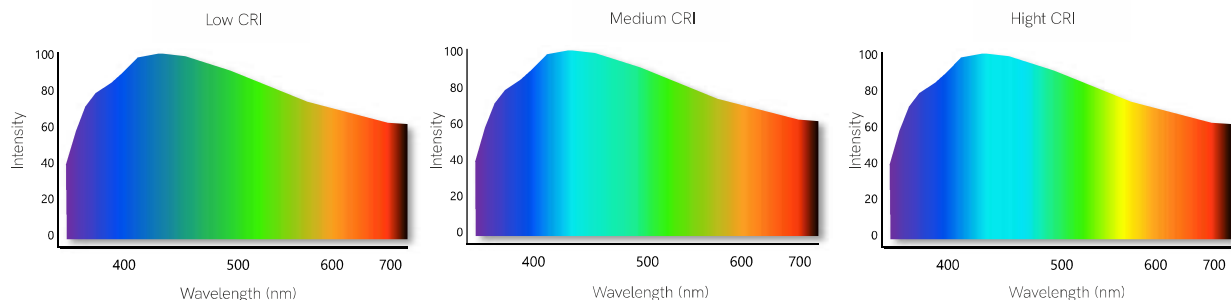


CRI or the Color Rendering Index is a measurement that evaluates how faithfully a light source displays colors compared to natural light. It is classified from 0 to 100; 100 value is highest accurate representation of colors, while lower values may distort the appearance of colors. Our products CRI range from 80 to 98.

El CRI o Índice de Reproducción Cromática es una medida que evalúa la fidelidad con la que una fuente de luz muestra los colores en comparación con la luz natural. Se clasifica de 0 a 100; el valor 100 es la representación más precisa de los colores, mientras que los valores inferiores pueden distorsionar la apariencia de los colores. El CRI de nuestros productos oscila entre 80 y 98.




Photobiological risk are all photobiological hazards that can affect the skin and eyes. From ultraviolet to infrared wavelengths. A RG0 is the lowest risk and RG4 is the highest risk. All our products are the lowest risk, RG0 or Rg1.

Son todos los **riesgos fotobiológicos** que pueden afectar a la piel y los ojos. Desde las longitudes de onda ultravioleta hasta las infrarrojas. Un RG0 es el riesgo más bajo y un RG4 es el riesgo más alto. Todos nuestros productos tienen el riesgo más bajo, RG0 o RG1.

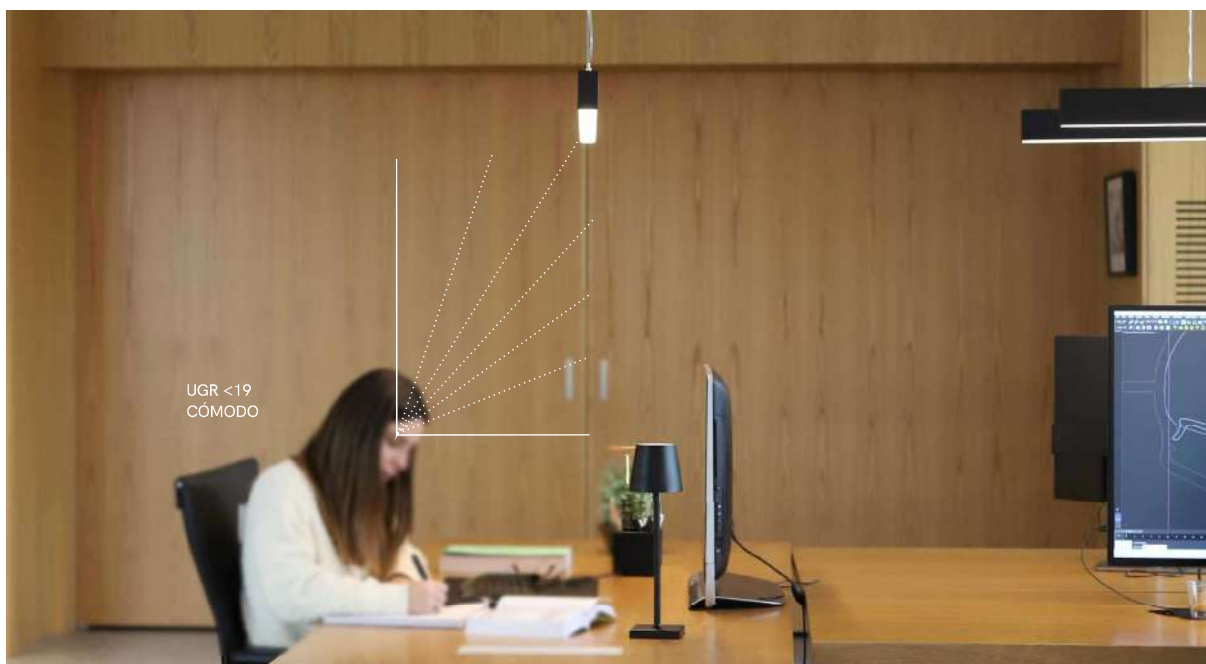

UGR or united glare rating is a measurement that helps us understand how much annoying glare can affect our vision. When the brightness is very strong it makes you squint or makes it difficult for you to see well. The higher the index, the more annoying the brightness can be for our eyes. You can check which products have a UGR less or equal than 19 as requested by the regulations for workspaces.

El **UGR** o índice de deslumbramiento unido es una medida que nos ayuda a comprender hasta qué punto el molesto deslumbramiento puede afectar a nuestra visión. Cuando la luminosidad es muy intensa, nos hace entrecerrar los ojos o nos dificulta ver bien. Cuanto mayor sea el índice, más molesto puede ser el brillo para nuestros ojos. Puede comprobar qué productos tienen un UGR inferior o igual a 19, tal y como exige la normativa para espacios de trabajo.

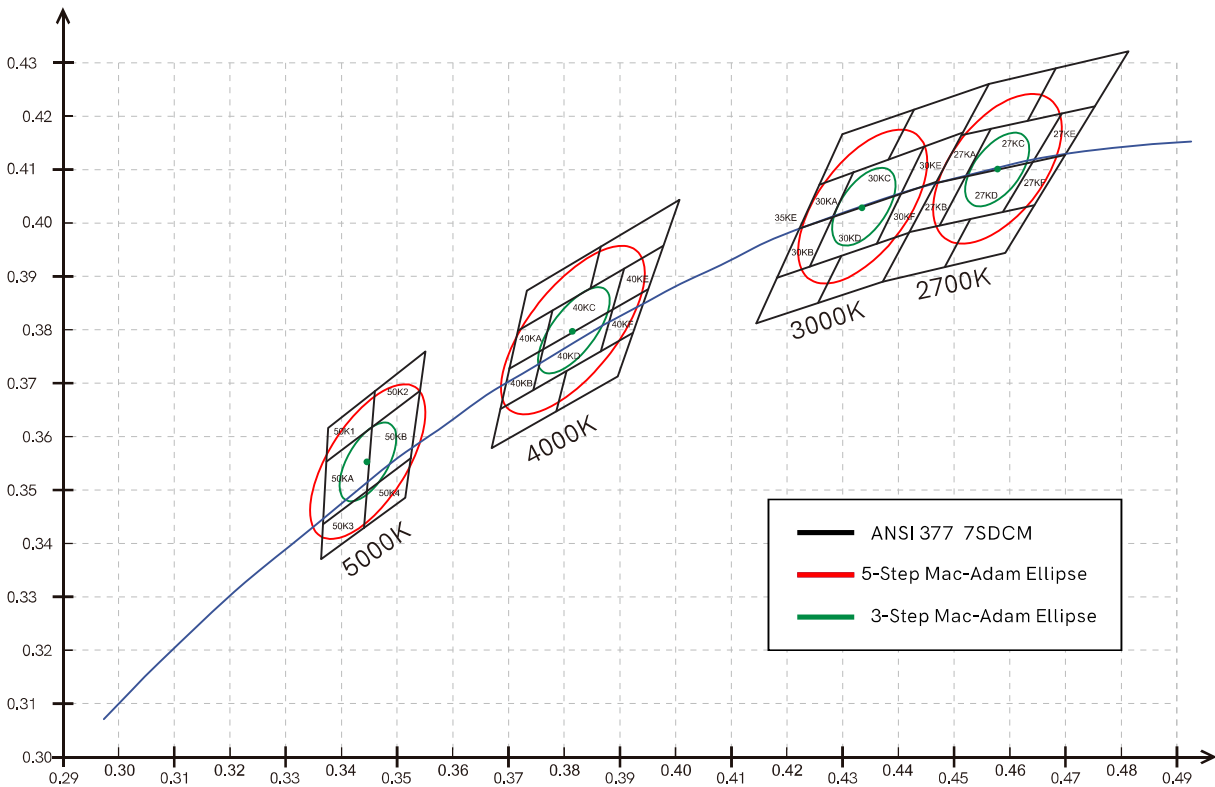

Steps MacAdam are a measurement that describes the color variation perceptible to the human eye. They are a series of ellipses that represent the changes in the different CCTs. The fewer MacAdam steps, the greater the perceived uniformity and consistency of color. All our products have 3 or 5 steps MacAdam.

ONE binning are groups of LEDs that are formed based on the same characteristics in light intensity and CCT. This ensures continuity in CCT and brightness in different manufacturing batches.

Los pasos **Steps MacAdam** son una medida que describe la variación de color perceptible por el ojo humano. Son una serie de elipses que representan los cambios en los diferentes CCT. Cuantos menos pasos MacAdam, mayor uniformidad y consistencia de color se percibe. Todos nuestros productos tienen 3 o 5 pasos MacAdam.

ONE binning son grupos de LEDs que se forman en base a las mismas características en intensidad luminosa y CCT. Esto asegura la continuidad en CCT y brillo en diferentes lotes de fabricación.

The effects of light

Efectos de la luz

The different CCT of light and colors affect human beings in a direct way in emotions, mood and sense of well-being. Warmer light tends to create a more welcoming and relaxing atmosphere. Cooler light tends to be more stimulating and can help maintain alertness and focus. Color-changing lighting can also attract attention to a certain area. In the same way, using an inappropriate CCT or changing color too quickly can negatively affect the users of the space, causing discomfort and stress.

Las distintas TMC de luz y colores afectan al ser humano de forma directa en las emociones, el estado de ánimo y la sensación de bienestar. La luz más cálida tiende a crear un ambiente más acogedor y relajante y luz más fría tiende a ser más estimulante y puede ayudar a mantener el estado de alerta y la concentración.

La iluminación que cambia de color también puede atraer la atención hacia una zona determinada.

Del mismo modo, utilizar un TAC inadecuado o cambiar de color demasiado rápido puede afectar negativamente a los usuarios del espacio, provocando incomodidad y estrés.

Surface / Pendant



NEW

Evo
43



NEW

Evo mini
49



NEW

Evo R
50



NEW

Urban fly
60



NEW

Kubo
85



NEW

Mirrow
89



NEW

Tax
91



NEW

Nyneto
101



NEW

Minimus
103



Dau
105



Grip
99



Nexus
76



Square
109



Time
73



Triton
143



Triton down
147



Urban
asymmetric
64



Urban market
70



Urban train
58



Urban work
61

Pendant



NEW

Evo fly
45



NEW

Evo dual
47



NEW

Horizon
139



Dual
77



WOOD

Forest
79



Filter
93



Tubi
95

Luminaires

Recessed



NEW

Evo E
53



Urban E
56



Time E
74



Kubo E
86



Dau E
106

Wall



NEW

Evo dual
47



NEW

Tubi wall
97



Urban wall sensor
62



Time wall sensor
81



Flash
141

Blaber



NEW

Blaber line
151



NEW

Blaber square
153



NEW

Blaber round
155



NEW

Blaber triangular
157

Kaa



NEW

Kaa
135



NEW

Kaa line
137

Track



NEW

Evo track
51



Urban track
68



Time track
83

Luminaires

Zero



NEW
Zero XL
119



NEW
Circus
113



NEW
Tundra
115




NEW
Zero in
111



NEW
Zero out
117



Zero direct
123



Zero design
126-127



Zero dual
133

Luminaires accessories

158-159



Led strips

210



NEW
Fine 48
217



NEW
Fine 54
247



NEW
Fine 63
243



NEW
Fine 64
216



NEW
Fine 71
255



NEW
Fine 76
231



NEW
Fine 96
230



Fine 31
225



Fine 32 N
237



Fine 36
244



Fine 41
223



Fine 42
245



Fine 43
251



Fine 44
239



Fine 45
257



Fine 46
249



Fine 47
254



Fine 49
235

Led strips

					
Fine 50 252	Fine 51 236	Fine 52 229	Fine 55 233	Fine 56 232	Fine 61 227
					
Fine 66 253	Fine 69 221	Fine 84 219			


SPI

			
NEW Fine running 259	NEW Fine SPI-2 260	NEW Fine SPI-3 261	NEW Fine SPI-4 263

DMX

	
NEW Fine DMX-4 264	NEW Fine DMX-5 265

Neon

			
Fine 25 268	Fine 70 272	Fine 72 276	Fine 74 278

Control

									
NEW Casambi 285-286	NEW SPI 287	NEW DMX 287	RF 282	Tuya 283	PMW/RF 286	Triac 288	Dali 288	Motion Sensor 289	Power supplies 290-291

Led strips accessories
292-293



Profiles

160

Surface



NEW
Box 73
193



Box 12
192



Box 16
166



Box 18
169



Box 23
172



Box 28
197

Surface / Pendant



NEW
Box 75
182



NEW
Box 99
185



Box 19
180



Box 39
196



Box 35
176

Recessed



NEW
Box 95
183



Box 10
181



Box 11
195



Box 15
167



Box 17
171



Box 53
173



Box 38
177

Corner



NEW
Box 24
189



NEW
Box 60
187



NEW
Box 71
190



Box 14
186



NEW
Box 68
175



Box 37
179

Recessed trimless

Wall



NEW
Box 98
199



Box 22
200



Box 27
203



Box 33
201

Flex



Box 13
191

Skirting



NEW
Box 65
205



Box 21
202

Step



NEW
Box 67
207

Recessed floor



Box 29
208

Heat sink



Box 30
209

Technical lighting

298

Three phase track



NEW
Lonja
301



NEW
Crown
309



NEW
Cookie
329



Sono
303



Zoom
305



Lena
311



Aston
313



Konic
315



Kom
317



Tram
319



Alfa
321



Picolo switch
323



Picolo GU10
324



Picolo AR111
326



Three phase track
330-333



Three phase base
331-333

Surface



NEW
Crown
309



NEW
Golf
376-377



Nox
335



Picolo switch
323



Picolo
GU10
324



Picolo
AR111
326



WOOD
Pulcom
surface
350



Pulsar
surface
356



Nano pulsar
surface
362

Recessed



NEW
Crown
309



NEW
Micro zoom
375



NEW
Atom
379



NEW
Oxo
365



Bonn
337



Tram
recessed
339-340



Tao
343



Pulcom
345-348



Pulsar
355



NEW
Pulsar
gold trim
356



Nano pulsar
358



NEW
Nano pulsar
gold trim
360



Mini oxo
367-369



Nano oxo
372

Decorative lighting

380

Magnet track 48V



NEW
Hat
401



NEW
Sphere
389



NEW
Diro
405



NEW
Cookie
391



NEW
Fine 25 circle
406



NEW
Curve tram
388



NEW
Curve line
388



NEW
Curve track
409



NEW
Casambi control
407



Tram 48V
385



Line
387



Dot
395



Bora
397



Alp
399



Zoe
400



Volt
403



Magnet track
408-409

Space



Bora
421



Bora XL
422



Zoe
425



Zoe XL
426



Nano alp
429



Alp
430



Lievo
433



Lievo XL
434



Side base
416



Front base
418

Surface / Recessed



NEW
Hat
455



NEW
Argo
475



NEW
Cookie
437



NEW
Alp surface
444



Bora
439



Bora
440-442



Zoe
445

Decorative lighting

Surface / Recessed



Atmos slim
447



Atmos switch
448



Atmos GU10
450



Ark
453



Volt
457-461



Stem
505

Wall / Ceiling



NEW
Sphere wall
487



NEW
Sphere Alp
487



NEW
Sweet
489



NEW
Beam
491



NEW
Pure
493



NEW
Oma
495



NEW
Tron
485



Tot
463



Rubyc
465



Mini rubyc
466



Concord
469



Mini concord
470



Plus
473



Icon
483



WOOD
Mac wall
477



One wall
479



Zio wall
481

Recessed



Lao
497



Pun
499



Ilo
501



Skin
501



Port
502



Grow
502



Steps
502

Decorative lighting

Portable battery



NEW
Bag
507



NEW
Bimba
509



Lievo
513



Converse
515

Downlights

516



Kora round
519



Kora square
520



Thessis
523 / 524



Air
527



Noi
529



Compac
531

Industrial lighting

532



NEW
Ufo lens switch
534-535



Ufo lens dali
538-539



Ufo
545

Solar lighting


638



NEW
Gam
641



Popa
643



Proa
644



Egna
647



Iris
649



Visor
651

Outdoor lighting

546

Track 48V



NEW
Ice
549



NEW
Atmos track
550



NEW
Bit
551



NEW
Frame
552



NEW
Outdoor track
553

Floor



Mac
555



Tura
559



Clos
561



Clos base
562-563



Cam
567



Signal
575



Fix
611



Sair
613



Caddie
615



Fade
617



Zas
619



Sky with spike
621

Wall



NEW
Mac wall base
557



NEW
Sunset XL
581



NEW
Artis
603



NEW
Tween
605



NEW
Oma
495



NEW
Sphere wall
487



WOOD
Mac wall
477



Clos
561



Mini comet
565



Comet
565



Neo
569-570



Neo XL
569-570



Gadir
577

Outdoor lighting

Wall



Sunset
579



Lek
583



Blis
585



Selen
587



Zibor
589



Nik
607

Recessed



NEW
Tween
605



NEW
Artis
603



Sigma
573



Optic
591



Ina
592



Dis
592



Nix
591



Polo
595



Luky
597



Mis
599-600

Spotlight



Sky switch
623-624



Sky microwave
sensor
626



Sky
628



Sky 2.200K
629



Polaris
631



Krion
633

Portable battery



NEW
Bimba
509



NEW
Madi
637



Lievo
513



Visor
609



Wech
635

Rings

652



NEW
Luk IP65
663



Avant
655



One
657



Zio
659



Rok
661



Bathroom
665



Eclipse
667



Basculante
669



Fijo
671

Retrofit

672



NEW
AR111 15°
675



Nitro and Dole
676



Lynk
677



Max
678



Power
679



System
680



Hook
681



Uniform-line
682



Narrow
683



Tutto
684



Adn
685



Uniform-line G4
686



Uniform-line G9
687



Shop, Prisma
688



PL T40
689

Retrofit



Cala
690



HQL tubular
691



Lineal
692



Lineal
693



Esférica
694



Standard
695-696



Standard dimmable
697



Globo
698



Globo
699



Flama
700



R-63 S-line
701



Reflectors
702



Reflectors
703



Par
704



Sil
705



Aria
706



Cup
707



Obo
708-709



Smile
712



Noa
713



Luminaires

The custom lighting

Our R&D and Production departments are responsible for designing special parts and customized solutions to meet the unique needs of our customers. Our commitment is to offer customized solutions with the highest quality and guaranteed compliance with regulations and certifications.

Our R&D services stand out for:




- Customized Design and Development: Our team of R&D experts works closely with customers to understand their specific challenges and needs. We use cutting-edge technology and creativity to conceive and design custom parts and solutions that perfectly fit your requirements.
 - Constant Innovation: We maintain a constant focus on innovation. We are committed to keeping up with the latest trends, technologies, and design practices to ensure that our solutions are always cutting-edge and effective.
 - Quality Production: Our production department is equipped with state-of-the-art machinery and a highly trained team. This allows us to carry out the manufacture of parts designed accurately and efficiently, maintaining high quality standards.
 - Adaptation to Regulations and Certifications: We understand the importance of complying with regulations and certifications. Our products and solutions are designed and manufactured in strict compliance with applicable standards, thus ensuring safety and compliance with current regulations.
 - Energy efficiency: With the need to change consumption patterns and in line with the sustainable development objectives of the 2030 Agenda, we are increasingly trying to develop environmental and sustainability policies, both in our products and services, as well as in all phases of the production chain.
 - Efficiency and cost-effectiveness: We take advantage of technology and innovation to optimize processes and maximize production efficiency. This not only guarantees quality, but also cost-effectiveness for our customers.
 - Personalized Customer Service: We pride ourselves on providing world-class customer service. We are available to answer your questions, adjust designs according to your changing needs, and provide exceptional after-sales service.
- When you trust our R&D and production department, you are choosing a complete solution tailored to your needs, backed by quality, innovation and commitment to regulations and certifications. We are ready to be your partner in the search for customized solutions of the highest quality.

Contact us and find out how we can help you achieve your goals!

Nuestros departamentos de I+D y de Producción son los encargados de diseñar piezas especiales y soluciones a medida para satisfacer las necesidades únicas de nuestros clientes. Nuestro compromiso es ofrecer soluciones personalizadas con la máxima calidad y garantía de cumplimiento de normativas y certificaciones.

Nuestros servicios de I+D destacan por:

- Diseño y Desarrollo Personalizado: Nuestro equipo de expertos en I+D trabaja de cerca con los clientes para comprender sus desafíos y necesidades específicas. Utilizamos tecnología de vanguardia y creatividad para concebir y diseñar piezas y soluciones a medida que se adaptan perfectamente a sus requerimientos.
 - Innovación Constante: Mantenemos un enfoque constante en la innovación. Estamos comprometidos a mantenernos al tanto de las últimas tendencias, tecnologías y prácticas de diseño para asegurarnos de que nuestras soluciones sean siempre vanguardistas y eficaces.
 - Producción de Calidad: Nuestro departamento de producción cuenta con maquinaria de última generación y un equipo altamente capacitado. Esto nos permite llevar a cabo la fabricación de las piezas diseñadas de manera precisa y eficiente, manteniendo altos estándares de calidad.
 - Adaptación a Normativas y Certificaciones: Entendemos la importancia de cumplir con las normativas y certificaciones. Nuestros productos y soluciones son diseñados y fabricados con estricto cumplimiento de los estándares aplicables, garantizando así la seguridad y la conformidad con la normativa vigente.
 - Eficiencia energética: Con la necesidad de cambiar los modelos de consumo y en la línea de los objetivos de desarrollo sostenible de la Agenda 2030, cada vez más se intenta desarrollar políticas medioambientales y de sostenibilidad, tanto en nuestros productos y servicios, como en todas las fases de su cadena de producción.
 - Eficiencia y Costo-efectividad: Aprovechamos la tecnología y la innovación para optimizar procesos y maximizar la eficiencia en la producción. Esto no solo garantiza la calidad, sino también un costo razonable para nuestros clientes.
 - Atención al Cliente Personalizada: Nos enorgullece ofrecer un servicio al cliente de primer nivel. Estamos disponibles para atender sus preguntas, ajustar diseños según sus necesidades cambiantes y brindar un servicio postventa excepcional.
- Cuando confía en nuestro departamento de I+D y producción, está eligiendo una solución completa y adaptada a sus necesidades, respaldada por la calidad, la innovación y el compromiso con las normativas y certificaciones. Estamos listos para ser su socio en la búsqueda de soluciones personalizadas de la más alta calidad.
- ¡Contáctenos y descubra cómo podemos ayudarle a alcanzar sus objetivos!

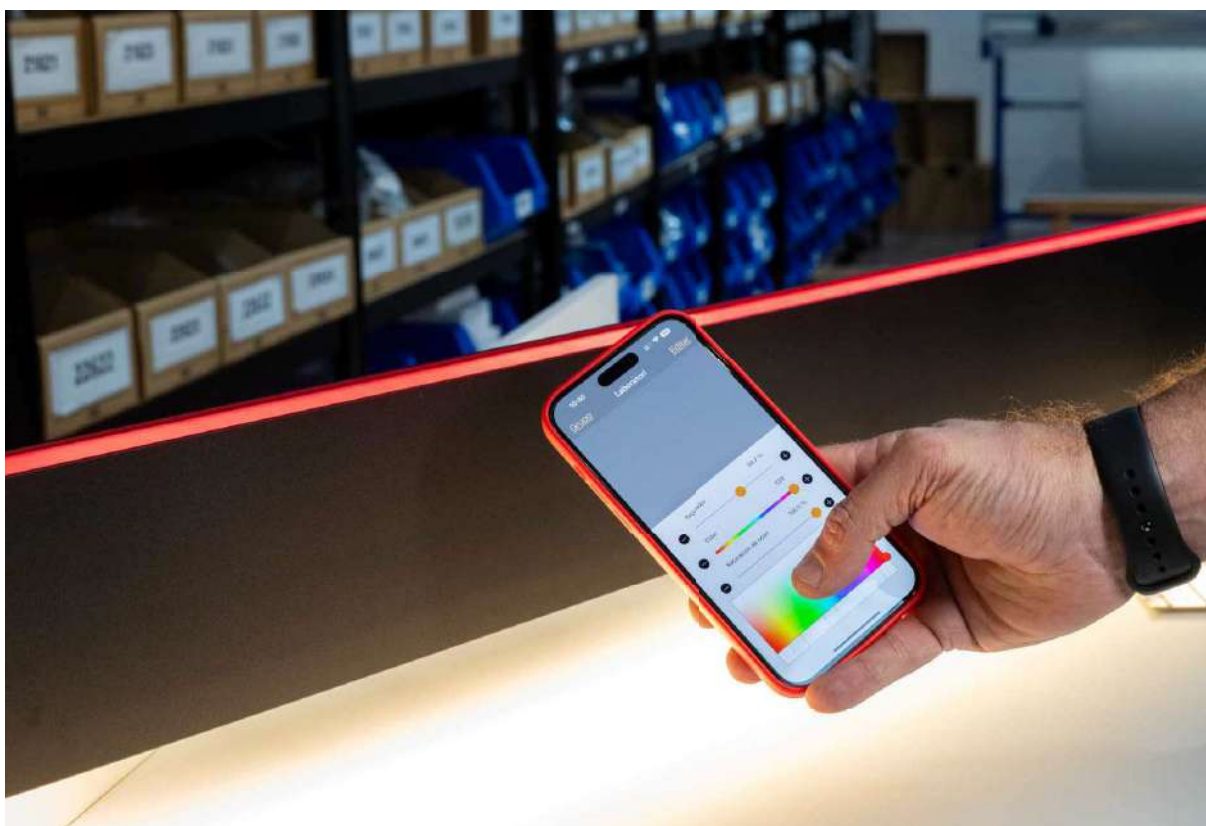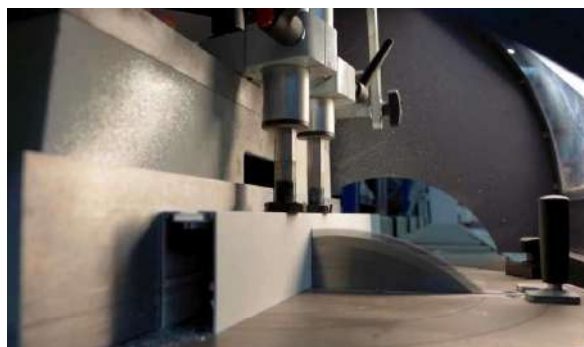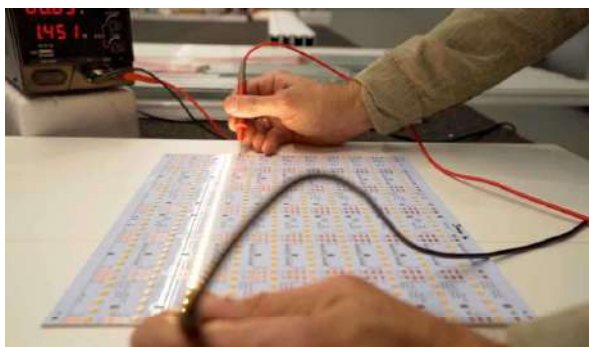



Do you want a custom-made luminaire?

Look for the Cutting symbol and consult our sales department!



Customisation of the cut and
handling to the requested size.



Do you want to customize **your** luminaires?

Look for the RAL or Electrolytic Plating symbol and consult our sales department!



Custom RAL



Electrolytic Plating

	Model	Page	Power	Section Size	Installation
	URBAN	55	46W/57W/69W/80W/ 103W	58x68 mm	  Surface / Pendant
	URBAN ASYMMETRIC	64	25W/31W/37W/43W/ 55W	58x68 mm	  Surface / Pendant
	URBAN MARKET	70	45W/55,5W/66W/ 76,5W/97,5W	58x68 mm	  Surface / Pendant
	TIME	73	31W/46W/69W	39x75 mm	  Surface / Pendant
	TRITON DOWN	147	46W/57W/69W/80W /103W	47x66 mm	  Surface / Pendant
NEW	EVO MINI	49	38W/56W/74W	28x25 mm	  Surface / Pendant
NEW	EVO R	50	38W/56W/74W	35x25 mm	  Surface / Pendant
NEW	MINIMUS	103	25W/31W/37W/43W	16x25 mm	  Surface / Pendant
NEW	KUBO	85	31W/38W/46W/54W	35x35 mm	  Surface / Pendant
	ZERO DESIGN	126-127	22W/m	35x35 mm	  Surface / Pendant
	DAU	105	18W/23W/26W/30W	25x25 mm	  Surface / Pendant
	DUAL	77	18-24W/28-35W/ 46-52W	39x125 mm	 Pendant
	URBAN TRAIN	58	46W/57W/69W/80W	58x68 mm	 Pendant
	URBAN FLY	60	2X14W/3X14W 4X14W/6X14W	58x68 mm	 Pendant
	URBAN WORK	61	35W/43W/51W/ 59W/97,5W	58x68 mm	 Pendant
	FOREST	79	31W/38W/46W/53W	64x95 mm	 Pendant
NEW	EVO FLY	45	44W/55W/66W/77W	24x75 mm	 Pendant
NEW	EVO DUAL	47	49W/61W/73W/86W	24x75 mm	  Pendant / Wall
	FILTER	93	32W/120W	Ø60 mm	 Pendant
	TUBI	95	35W/44W/53W/62W	Ø62 mm	 Pendant
	NEXUS	76	46W/70W	39x75 mm	 Pendant
NEW	EVO	43	38W/56W/74W	28x60 mm	 Pendant
NEW	MIRROW	89	85W/94W	35x35 mm	 Pendant
NEW	TAX	91	52W/64W	35x35 mm	 Pendant
	GRIP	99	26W/33W/39W/46W	Ø28 mm	 Pendant
	SQUARE	109	43W/62W	25x25 mm	 Pendant


CRI	CCT	IP	Custom	Standard finishes
	2700K 3000K 4000K 5000K CCT	40 IP	YES	White Black Gray Matt Gold Corten Copper
	2700K 3000K 4000K	40 IP	YES	White
	3000K MEAT R HAM MEAT M 4000K FISH FRUIT BREAD	40 IP		White Black
	2700K 3000K 4000K 5000K	40 IP	YES	White Black Gray
	2700K 3000K 4000K 5500K	65 IP	YES	White Black
	2700K 3000K 4000K	40 IP	YES	White Black
	2700K 3000K 4000K	40 IP	YES	White Black
	2700K 3000K 4000K	40 IP	NO	White Black
	2700K 3000K 4000K 5000K RGB-W CCT	20 IP	YES	White Black
	2700K 3000K 4000K CCT	20 IP	YES	White Black Gray Matt Gold
	2700K 3000K 4000K 5000K RGB-W CCT	20 IP	NO	White Black
	2700K 3000K 4000K 5000K	40 IP	YES	White Black
	2700K 3000K 4000K 5000K	40 IP	YES	White Black
	3000K 4000K	40 IP	YES	White Black
	2700K 3000K 4000K 5000K	40 IP	YES	White Black
	2700K 3000K 4000K 5000K CCT	40 IP	NO	Wood
	2700K 3000K 4000K	40 IP	YES	White Black
	2700K 3000K 4000K RGB-W CCT	40 IP	NO	White Black
	2700K 3000K 4000K RGB	20 IP	NO	White Black
	2700K 3000K 4000K 5000K RGB-W CCT	40 IP	NO	White Black
	CCT	40 IP	YES	White Black Gray
	2700K 3000K 4000K	40 IP	YES	White Black
	2700K 3000K 4000K RGB-W CCT	20 IP	YES	White Black
	2700K 3000K 4000K RGB-W CCT	20 IP		White Black
	2700K 3000K 4000K RGB CCT	40 IP	NO	Black
	2700K 3000K 4000K RGB-W CCT	20 IP	YES	White Black Matt Gold Silver

Consult delivery terms and conditions.

	Model	Page	Power	Section Size	Installation
NEW	NYNETO	101	16W/20W/24W/28W	10x12 mm	 Pendant
NEW	KAA LINE	137	30W/60W/100W	Ø25 mm	 Pendant
NEW	KAA	135	90W/180W/300W	Ø25 mm	 Pendant
	ZERO XL	119	78W/105W/131W	100x90 mm	 Pendant
	ZERO DUAL	133	107W/162W/325W	50x60 mm	 Pendant
	ZERO DIRECT	123	35W/55W/75W/94W 189W	35x35 mm	 Pendant
NEW	ZERO IN	111	26W/44W/63W/96W	38x22 mm	 Pendant
NEW	CIRCUS	113	26W/44W/63W	38x22 mm	 Pendant
NEW	TUNDRA	115	56W/81W	38x22 mm	 Pendant
NEW	ZERO OUT	117	26W/44W/63W/96W	38x22 mm	 Pendant
NEW	HORIZON	139	62W/75W/94W/189W	15 mm	 Pendant
	URBAN E	57	46W/57W/69W/80W /103W	75x68 mm	 Recessed
	TIME E	74	31W/46W/69W	54x75 mm	 Recessed
	KUBO E	86	31W/38W/46W/54W	50x35 mm	 Recessed
NEW	EVO E	53	10W/21W/31W/42W 52W/63W/73W	34x25 mm	 Recessed
	DAU E	106	18W/23W/26W/30W	34x25 mm	 Recessed
	URBAN WALL SENSOR	62	21W/32W/43W	58x68 mm	 Wall
	TIME WALL SENSOR	81	15W/23W/31W	39x75 mm	 Wall
NEW	TUBI WALL	97	35W/44W/53W	Ø62 mm	 Wall
	TRITON	143	21W/41W/61W	47x66 mm	 Surface
	FLASH	141	16W/27W/35W/46W /55W	18x49 mm	 Wall
NEW	EVO TRACK	51	38W/56W/74W	90x57 mm	 Track
	URBAN TRACK	68	21W/32W/43W	58x68 mm	 Track
	TIME TRACK	83	15W/23W/31W	39x75 mm	 Track
NEW	BLABER LINE	151	30W/39W/49W	54x300 mm	 Pendant
NEW	BLABER	153-157			Pendant



CRI	CCT	IP	Custom	Standard finishes
 ≥90	2700K 3000K 4000K	20 IP	NO	White Black
 ≥90	2400K 2700K 3000K 4000K  CCT	40 IP		White Black 
 ≥90	2400K 2700K 3000K 4000K CCT	40 IP		White Black
 ≥80	3000K 4000K	20 IP	NO	White Black Gray
 ≥80	3000K 4000K	20 IP	NO	White Black
 ≥80	2700K 3000K 4000K CCT	20 IP	YES	White Black  Silver
 ≥90	2700K 3000K 4000K  CCT	20 IP	YES	White Black  Silver
 ≥90	2700K 3000K 4000K  CCT	20 IP	NO	White Black  Silver
 ≥80	2700K 3000K 4000K  CCT	20 IP	YES	White Black  Silver
 ≥90	2700K 3000K 4000K  CCT	20 IP	YES	White Black  Silver
 ≥90	2700K 3000K 4000K	20 IP	NO	White Black
 ≥95	2700K 3000K 4000K 5000K CCT	40 IP	YES	White Black Gray
 ≥95	2700K 3000K 4000K 5000K	40 IP	YES	White Black Gray
 ≥95	2700K 3000K 4000K  CCT	40 IP	NO	White Black
 ≥90	2700K 3000K 4000K	40 IP	YES	White Black
 ≥90	2700K 3000K 4000K 5000K  CCT	20 IP	NO	White Black
 ≥95	2700K 3000K 4000K 5000K	20 IP	YES	White Black Gray
 ≥95	2700K 3000K 4000K 5000K	20 IP	YES	White Black Gray
 ≥95	2700K 3000K 4000K  CCT	40 IP	NO	White Black
 ≥80	2700K 3000K 4000K	65 IP	YES	Black
 ≥80	2700K 3000K 4000K 6000K	20 IP	NO	White Black Alum.
 ≥90	2700K 3000K 4000K	40 IP	NO	White Black
 ≥95	2700K 3000K 4000K 5000K CCT	20 IP		White Black
 ≥95	2700K 3000K 4000K 5000K	20 IP		White Black
 ≥90	2700K 3000K 4000K	40 IP	YES	   
			YES	   

 Consult delivery terms and conditions.

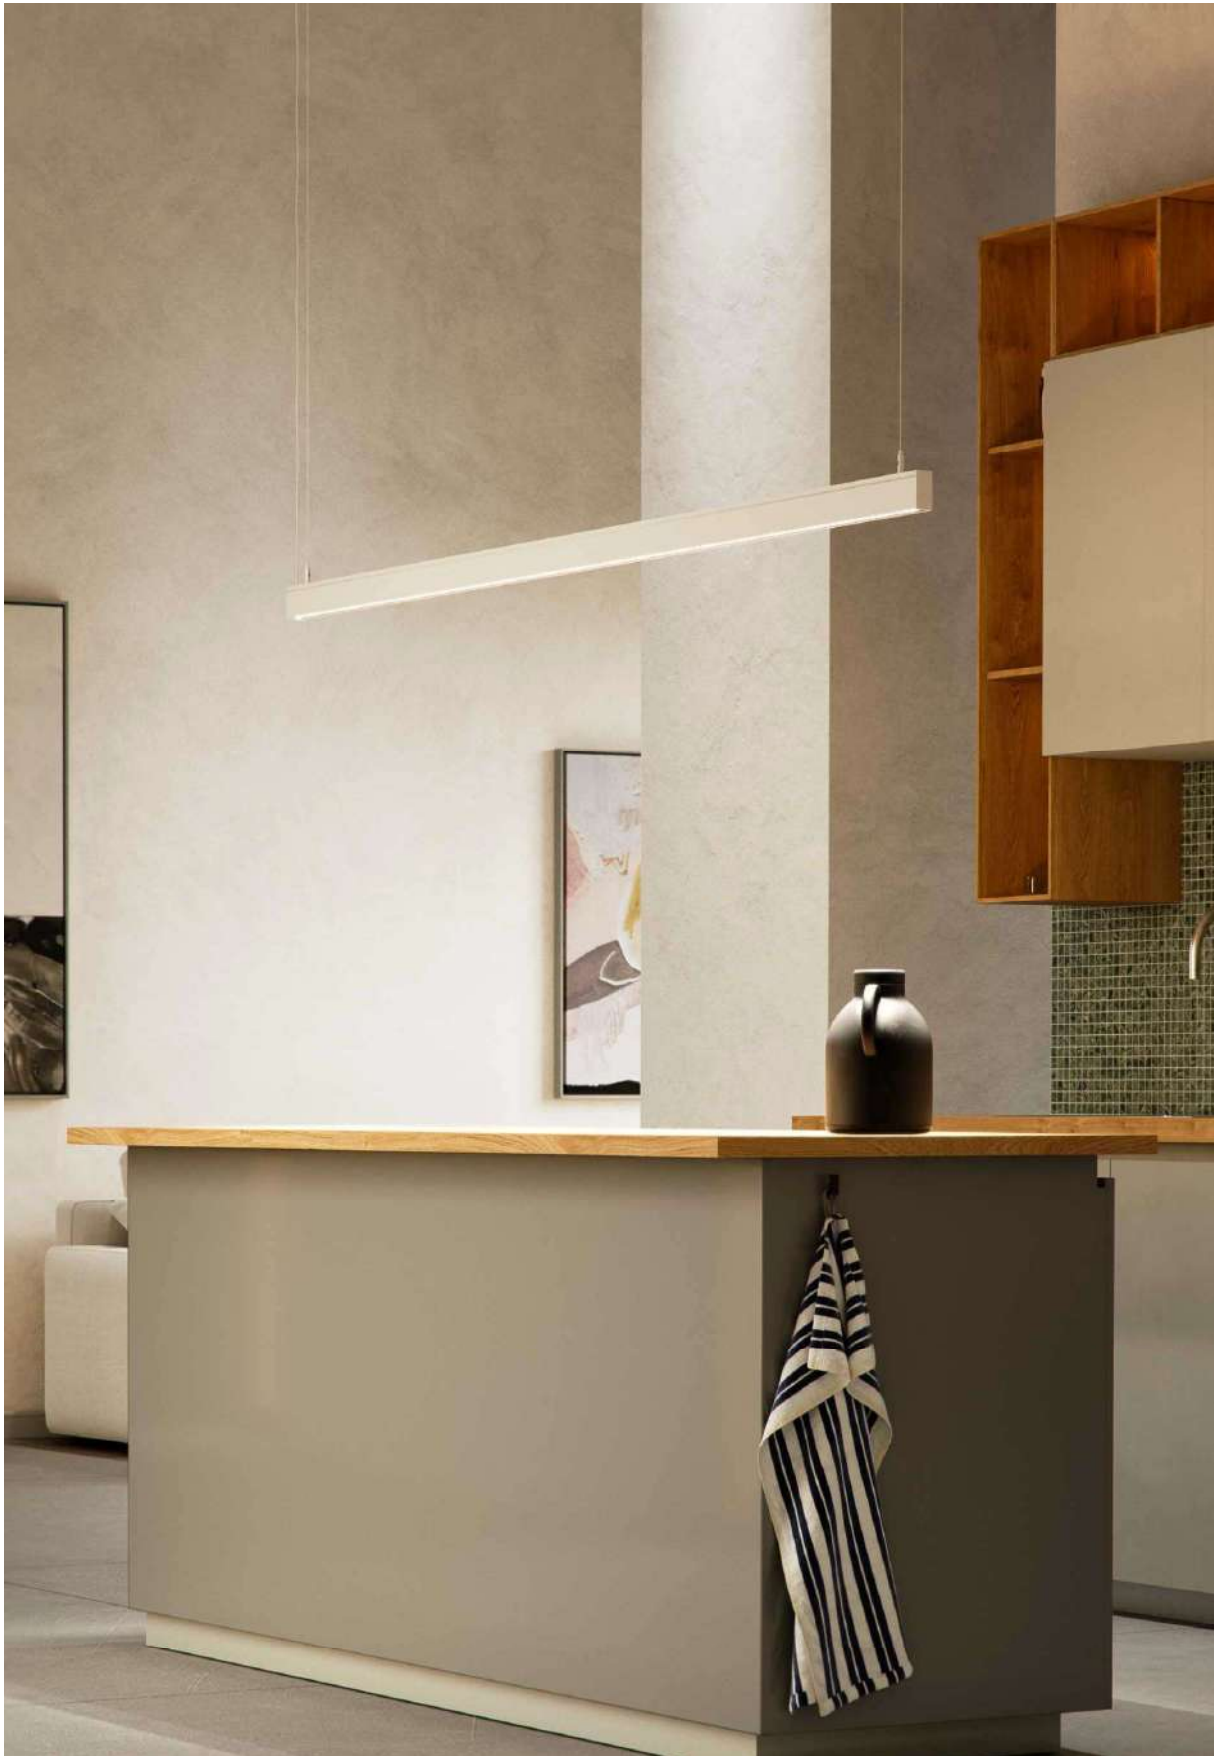

New

Evo



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	38W / 56W / 74W
Lumens	3,458 lm - 8,954 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 2	Black Slats (60°) N	1.170mm 2	2.700K (91-104 lm/W) - 34W/m 2	On / Off 1	White (9003) 1
	White Slats (60°) P	1.730mm 4	3.000K (96-109 lm/W) - 34W/m 3	Dali 2	Black (9005) 2
		2.290mm 6	4.000K (103/121 lm/W) - 34W/m 4	Push 3 ①	Custom RAL C
				Casambi 5	

Code: 2





① Consult delivery terms and conditions.
*Create your code according to your preferences.





New

Evo fly



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	44W / 55W / 66W / 77W
Lumens	4.004 lm - 9.317 lm
Installation	Pendant
Material	Aluminium
PCB	Down Rigid / Up Flex

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 4	Down Black Slats (60°)	1,120mm (44W) 4	2,700K Down (91-104 lm/W)	On / Off 1	White (9003) 1
	Up Opal	1,400mm (55W) 5	Up (88 lm/W)	Dali 2	Black (9005) 2
	Down White Slats (60°)	1,680mm (66W) 6	3,000K Down (96-109 lm/W)	Push 3	Custom RAL C
	Up Opal	1,960mm (77W) 7	Up (92 lm/W)	Casambi 5	
			4,000K Down (104-121 lm/W)		
			Up (96 lm/W)		

Code: 4




Consult delivery terms and conditions.
*Create your code according to your preferences.





New

Evo dual

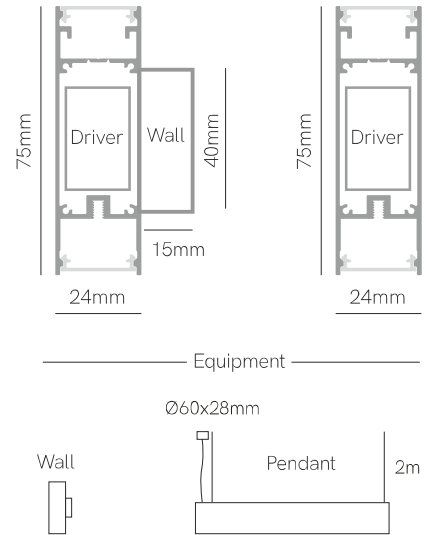

Control accessories pages 282-289.

*Finished luminaire. Includes power cable and end caps.



Technical Information

Power	49W / 61W / 73W / 86W
Lumens	5,145 lm - 11,696 lm
Installation	Pendant / Wall
Material	Aluminium
PCB	Flex

Code	Installation	Size (Power)	CCT (lm/W)	Driver	Colour
Code 5	Pendant 3	1,120mm (49W) 4	Down-Up 2,700K (124 lm/W) 2	On / Off 1	White (9003) 1
	Wall 7	1,400mm (61W) 5	Down-Up 3,000K (128 lm/W) 3	Dali 2	Black (9005) 2
		1,680mm (73W) 6	Down-Up 4,000K (136 lm/W) 4	Push 3	Custom RAL C
		1,960mm (86W) 7	Down-Up RGB-W (100 lm/W) 8	Casambi 5	
			Down-Up 2,700-5,500K (105 lm/W) 9	Tuya 7	
			Down 2,700-5,500K Up RGB-W C		
			Down 2,700K Up RGB-W D		
			Down 3,000K Up RGB-W T		
			Down 4,000K Up RGB-W Q		

Code: 5



Consult delivery terms and conditions.



*Create your code according to your preferences, RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.





New

Evo mini

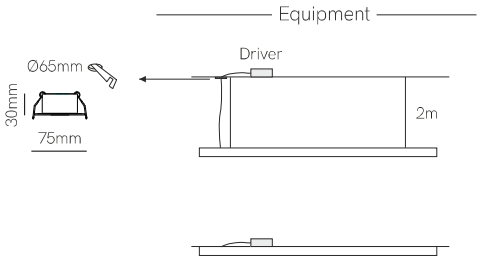

Control accessories pages 282-289.



*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

Technical Information

Power	38W / 56W / 74W
Lumens	3,458 lm - 8,954 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 8	Black Slats (60°) N	1.170mm 2	2.700K (91-104 lm/W) - 34W/m 2	On / Off 1	White (9003) 1
	White Slats (60°) P	1.730mm 4	3.000K (96-109 lm/W) - 34W/m 3	Dali 2	Black (9005) 2
		2.290mm 6	4.000K (103/121 lm/W) - 34W/m 4	Push 3 ①	Custom RAL C
				Casambi 5	

Code: 8





① Consult delivery terms and conditions.

*Create your code according to your preferences.



New

Evo R

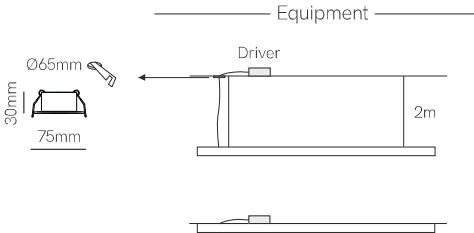

Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.

Technical Information

Power	38W / 56W / 74W
Lumens	3,458 lm - 8,954 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 3	Black Slats (60°) N	1.170mm 2	2.700K (91-104 lm/W) - 34W/m 2	On / Off 1	White (9003) 1
	White Slats (60°) P	1.730mm 4	3.000K (96-109 lm/W) - 34W/m 3	Dali 2	Black (9005) 2
		2.290mm 6	4.000K (103/121 lm/W) - 34W/m 4	Push 3 ①	Custom RAL C
				Casambi 5	

Code: 3





① Consult delivery terms and conditions.

*Create your code according to your preferences.



New

Evo track

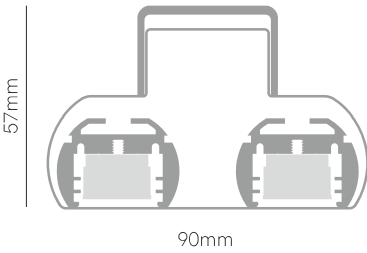

*Finished luminaire.

Technical Information

Power	38W / 56W / 74W
Lumens	3,458 lm - 7,622 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid


Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 9	Black Slats (30°) C	610mm 2	2,700K (91 lm/W) - 34W/m 2	On / Off 1	White (9003) 1
	White Slats (30°) F	890mm 3	3,000K (96 lm/W) - 34W/m 3		Black (9005) 2
	Black Slats (60°) N	1,170mm 4	4,000K (103 lm/W) - 34W/m 4		Custom RAL C
	White Slats (60°) P				

Code: 9 1



Consult delivery terms and conditions.





*Create your code according to your preferences.





New

Evo E



Control accessories pages 282-289.

*Finished luminaire. Includes driver, spring clips, power cable and end caps.



Technical Information

Power	10W / 21W / 31W / 42W / 52W / 63W / 73W
Lumens	910 lm - 8.833 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid


Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 5	Black Slats (60°) N	280mm 1	2.700K (91-104 lm/W) - 34W/m 2	On / Off 1	White (9003) 1
	White Slats (60°) P	560mm 2	3.000K (96-109 lm/W) - 34W/m 3	Dali 2	Black (9005) 2
		840mm 3	4.000K (104-121 lm/W) - 34W/m 4	Push 3	Custom RAL C
		1,120mm 4		Casambi 5	
		1,400mm 5			
		1,680mm 6			
		1,960mm 7			

Code: 5




Consult delivery terms and conditions.
*Create your code according to your preferences.



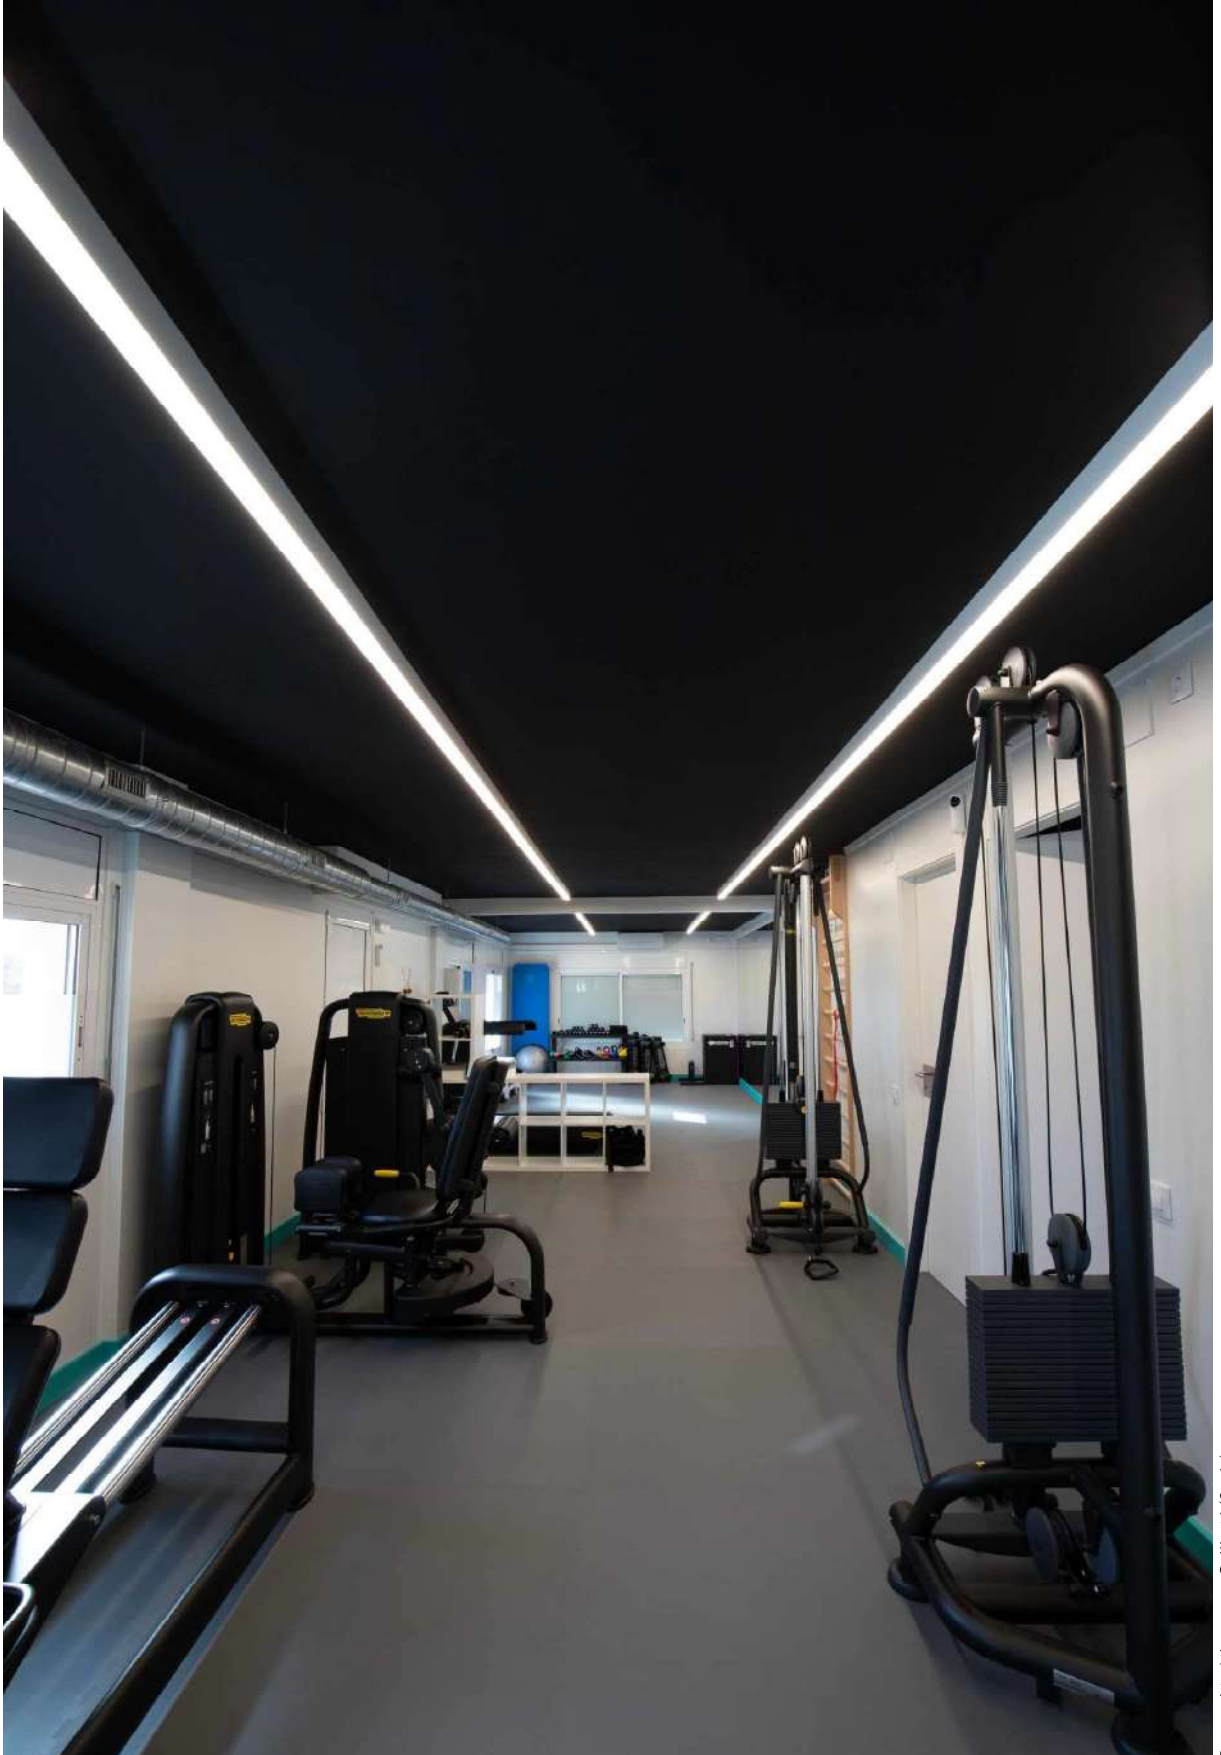

Personal training room, Collbató (Spain).

Urban



Control accessories pages 282-289.

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5,152 lm - 14,008 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	UGR (78°) 4	1.130mm 3	2,700K (112 lm/W) - 40W/m 2	On / Off 1	White (9003) 1
	Opal (112°) 5	1.410mm 4	3,000K (128 lm/W) - 40W/m 3	Dali 2	Black (9005) 2
		1.690mm 5	4,000K (136 lm/W) - 40W/m 4	Push 3	Gray (9006) 3
		1.970mm 6	5,000K (136 lm/W) - 40W/m 5	Casambi 5	Matt Gold 4
		2,530mm 7	2,700-5,500K (105 lm/W) - 40W/m 9	Tuya 7	Corten 6
					Copper 7
					Custom RAL C
					Electrolytic Plating

Code: 6

ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.

Accessories


End caps □ 40721 ■ 40722 ■ 40723	Joint 180° ■ 40220	Joint 90° ■ 40550	Wall bracket □ 40851 ■ 40852 ■ 40853	Trimless ■ 40669	Base 3x0,75 (2,5m) Ø60x28mm □ 40881 ■ 40882 ■ 40883	Base 5x0,5 (2,5m) Ø60x28mm □ 40991 ■ 40992 ■ 40993	Ceiling suspension ■ 40780	Suspension Kit ■ 40790 (2m)



Accessories pages 158-159.



Urban E

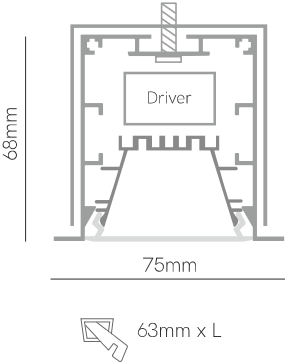

Control accessories pages 282-289.

*Spring clips included.

Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5,152 lm - 14,008 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 3	UGR (78°) 4	1,130mm 3	2,700K (112 lm/W) - 40W/m 2	On / Off 1	White (9003) 1
	Opal (112°) 5	1,410mm 4	3,000K (128 lm/W) - 40W/m 3	Dali 2	Black (9005) 2
		1,690mm 5	4,000K (136 lm/W) - 40W/m 4	Push 3	Gray (9006) 3
		1,970mm 6	5,000K (136 lm/W) - 40W/m 5	Casambi 5	Custom RAL C
		2,530mm 7	2,700-5,500K (105 lm/W) - 40W/m 9	Tuya 7	Electrolytic Plating

Code: 3

ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.

Accessories





Accessories pages 158-159.





Urban train



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	46W / 57W / 69W / 80W
Lumens	5,152 lm - 10,880 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	Black Slats (62°) 2	1,130mm 3	2,700K (112 lm/W) - 40W/m 2	On / Off 1	White (9003) 1
	Alum. Slats (84°) 7	1,410mm 4	3,000K (128 lm/W) - 40W/m 3	Dali 2	Black (9005) 2
		1,690mm 5	4,000K (136 lm/W) - 40W/m 4	Push 3	Custom RAL C
		1,970mm 6	5,000K (136 lm/W) - 40W/m 5	Casambi 5	Electrolytic Plating

Code: 6

Accessories pages 158-159.







Consult delivery terms and conditions.

*Create your code according to your preferences.





Urban fly



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	2x14W / 3x14W / 4x14W / 6x14W
Lumens	3,640 lm - 11,424 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size (Power)	CCT (lm/W)	Driver	Colour
Code 6	Optical (50°) 9	1,130mm (28W) 4	3,000K (130 lm/W) 3	On / Off 1	White (9003) 1
		1,690mm (42W) 5	4,000K (136 lm/W) 4	Dali 2	Black (9005) 2
		1,130mm (56W) New 7		Push 3	Custom RAL C
		1,690mm (84W) New 8		Casambi 5	Electrolytic Plating

Code: 6 9



Accessories pages 158-159.

Consult delivery terms and conditions.

*Create your code according to your preferences.



Urban work



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	35W / 43W / 51W / 59W / 97,5W
Lumens	3.675 lm - 11.505 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	Retracted (102°) 3	1.130mm 3	2.700K (105 lm/W) - 31W/m 2	On / Off 1	White (9003) 1
		1.410mm 4	3.000K (112 lm/W) - 31W/m 3	Dali 2	Black (9005) 2
		1.690mm 5	4.000K (118 lm/W) - 31W/m 4	Push 3	Custom RAL C
		1.970mm 6	5.000K (118 lm/W) - 31W/m 5	Casambi 5	Electrolytic Plating
		2.530mm 7			

Code: 6 3




Accessories pages 158-159.

Consult delivery terms and conditions.

*Create your code according to your preferences.



Urban wall sensor



*Finished luminaire. Includes power supply, base wall and end caps.

Technical Information

Power	21W / 32W / 43W
Lumens	2,352 lm - 5,848 lm
Installation	Wall
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	Opal (112°) 1	570mm 1	2,700K (112 lm/W) - 40W/m 2	PIR 0	White (9003) 1
		840mm 2	3,000K (128 lm/W) - 40W/m 3		Black (9005) 2
		1,130mm 3	4,000K (136 lm/W) - 40W/m 4		Gray (9006) 3
			5,000K (136 lm/W) - 40W/m 5		Custom RAL C
					Electrolytic Plating

Code: 6 1 0




Consult delivery terms and conditions.
*Create your code according to your preferences.





Urban asymmetric



Control accessories pages 282-289.

Technical Information

Power	25W / 31W / 37W / 43W / 55W
Lumens	1.650 lm - 4.290 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	Opal asym. 8	1.130mm 3	2,700K (66 lm/W) - 22W/m 2	On / Off 1	White (9003) 1
		1.410mm 4	3,000K (72 lm/W) - 22W/m 3	Dali 2	Custom RAL C
		1.690mm 5	4,000K (78 lm/W) - 22W/m 4	Push 3	Electrolytic Plating
		1.970mm 6		Casambi 5	
		2.530mm 7			

Code: 6 8 1

ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences.

Accessories


						
End caps	Joint 180°	Joint 90°	Base 3x0,75 (2,5m)	Base 5x0,5 (2,5m)	Ceiling suspension	Suspension Kit
□ 40721	■ 40220	■ 40550	□ 40881	□ 40991	■ 40780	■ 40790 (2m)
■ 40722						
■ 40723						



Accessories pages 158-159.







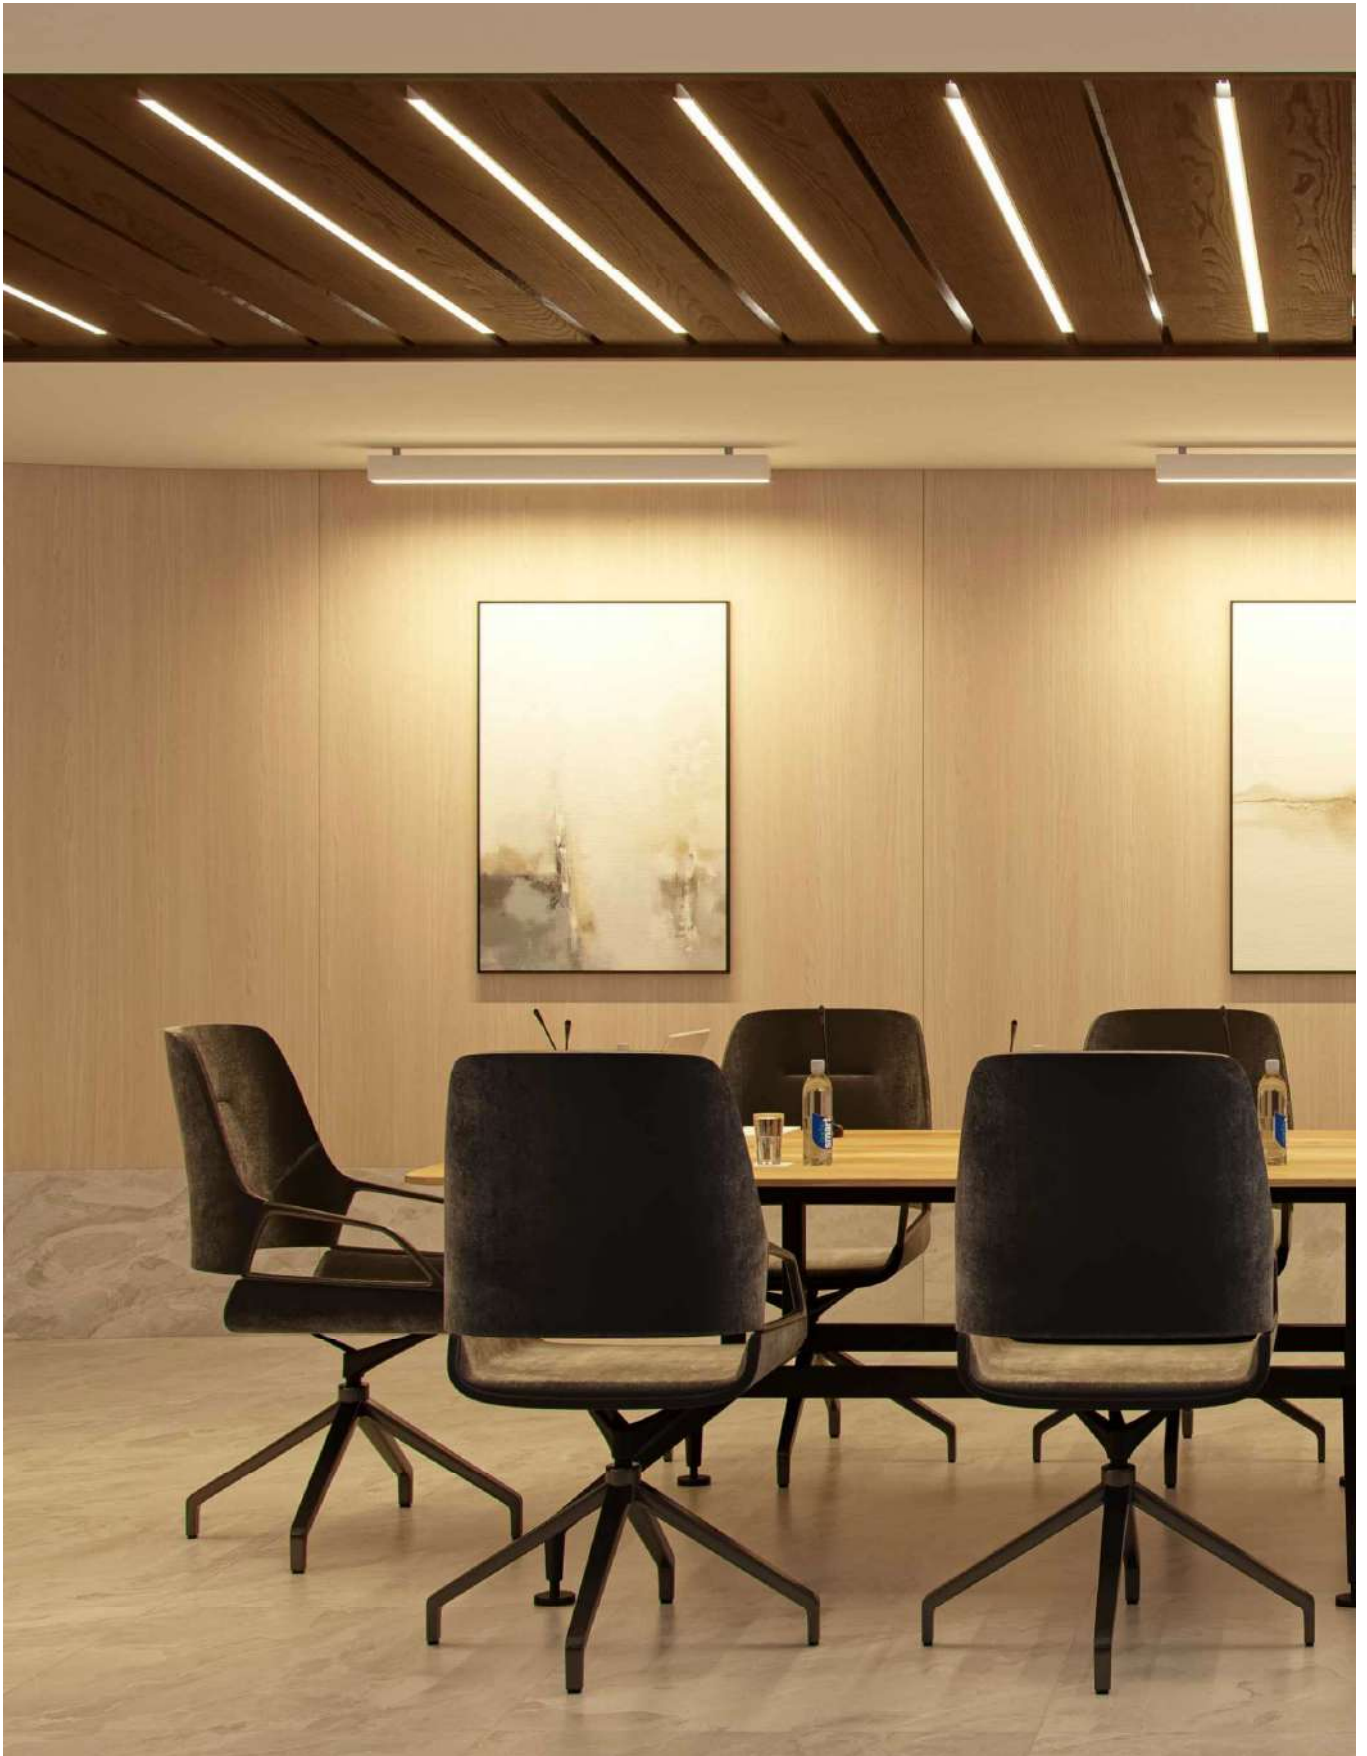



Urban track

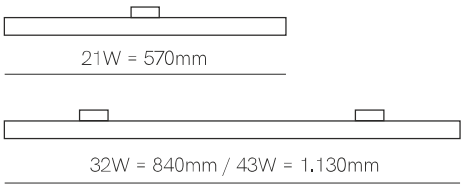

Control accessories pages 282-289.

*Finished luminaire.

Technical Information

Power	21W / 32W / 43W
Lumens	2,352 lm - 5,848 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 6	UGR (78°) 4	570mm 4	2,700K (112 lm/W) - 40W/m 2	On / Off 4	White (9003) 1
	Opal (112°) 5	840mm 6	3,000K (128 lm/W) - 40W/m 3	Casambi 6	Black (9005) 2
		1,130mm 8	4,000K (136 lm/W) - 40W/m 4		Custom RAL C
			5,000K (136 lm/W) - 40W/m 5		
			2,700-5,500K (105 lm/W) - 40W/m 9		

Code: 6



Consult delivery terms and conditions.

*Create your code according to your preferences, CCT 2,700-5,500K only works with driver 5 Casambi.

5 YEARS WARRANTY

50,000 HOURS

IP 20

UGR <19 (4)

230 VAC

PF >0,9


CRI ≥95

3,37m Max

PUSH



Urban market



Control accessories pages 282-289.

Technical Information

Power	45W / 55,5W / 66W / 76,5W / 97,5W
Lumens	5,040 lm - 13,552 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 2	Asymmetric 1	1.130mm 3	3,000K (112 lm/W) - 40W/m 3	On / Off 1	☐ White (9003) 1
	Double asym. 2	1.410mm 4	4,000K (118 lm/W) - 40W/m 4	Dali 2	☒ Black (9005) 2
	Optical (30°) 3	1.690mm 5	MEAT R - 3,200K (86 lm/W) - 40W/m R		☒ Custom RAL C
	Optical (60°) 6	1.970mm 6	HAM - 3,200K (85 lm/W) - 40W/m X		
	Optical (90°) 9	2.530mm 7	MEAT M - 3,500K (84 lm/W) - 40W/m M		
			FISH - 6,500K (139 lm/W) - 40W/m F		
			FRUIT - 4,200K (123 lm/W) - 40W/m V		
			BREAD - 2,700K (131 lm/W) - 40W/m P		

Code: **2** ☐ ☐ ☐ ☐ ☐

ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences.

Accessories

						
End caps ☐ 40721 ☒ 40722	Joint 180° ☒ 40220	Joint 90° ☒ 40550	Base 3x0,75 (2,5m) Ø60x28mm ☐ 40881 ☒ 40882	Base 5x0,5 (2,5m) Ø60x28mm ☐ 40991 ☒ 40992	Ceiling suspension ☒ 40780	Suspension Kit ☒ 40790 (2m)




Accessories pages 159-159.







Time



Control accessories pages 282-289.

Technical Information

Power	31W / 46W / 69W
Lumens	3,472 lm - 9,384 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 8	UGR (81°) 3	1.130mm 3	2,700K (112 lm/W) - 27W/m 2	On / Off 1	White (9003) 1
	Opal (112°) 5	1.690mm 5	3,000K (128 lm/W) - 27W/m 3	Dali 2	Black (9005) 2
		2.530mm 7	4,000K (136 lm/W) - 27W/m 4	Push 3	Gray (9006) 3
			5,000K (136 lm/W) - 27W/m 5	Casambi 5	Custom RAL C
					Electrolytic Plating

Code: 8

*Create your code according to your preferences.

Consult delivery terms and conditions.

Accessories


End caps	Joint 180°	Joint 90°	Wall bracket	Trimless	Base 3x0,75 (2,5m)	Base 5x0,5 (2,5m)	Ceiling suspension	Suspension kit
40741	40770	40990	40851	40339	Ø60x28mm	Ø60x28mm	40780	40790 (2m)
40742			40852		40881	40991		
40743			40853		40882	40992		
					40883	40993		



Accessories pages 158-159.



Time E

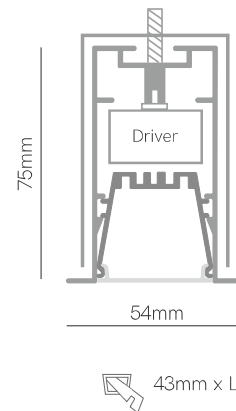

*Spring clips included, Control accessories pages 282-289.

Technical Information

Power	31W / 46W / 69W
Lumens	3,472 lm - 9,384 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 9	UGR (81°) 3	1,130mm 3	2,700K (112 lm/W) - 27W/m 2	On / Off 1	White (9003) 1
	Opal (112°) 5	1,690mm 5	3,000K (128 lm/W) - 27W/m 3	Dali 2	Black (9005) 2
		2,530mm 7	4,000K (136 lm/W) - 27W/m 4	Push 3	Gray (9006) 3
			5,000K (136 lm/W) - 27W/m 5	Casambi 5	Custom RAL C
					Electrolytic Plating

Code: 9

*Create your code according to your preferences.

Consult delivery terms and conditions.

Accessories





Accessories pages 158-159.





Nexus



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	46W / 70W
Lumens	4,830 lm - 7,350 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 4	UGR (81°) 4	1.130mm 3	2,700-5,500K (105 lm/W) - 40W/m 9	Casambi 5	White (9003) 1
		1.690mm 5		Tuya 7	Black (9005) 2
				RF Control 9	Gray (9006) 3
					Custom RAL C

Code: 4 4 9



Consult delivery terms and conditions.

*Create your code according to your preferences, RF included on Driver RF Control.

5 YEARS WARRANTY

50,000 HOURS

IP 40

UGR <19

230 VAC

PF >0,9


CRI >95

3,37m Max


tuya

RF


Dual



Opal/UGR



Track/UGR



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	18-24W / 28-35W / 46-52W
Lumens	Up 2,016 lm - 6,256 lm / Down 2,688 lm - 7,072 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid


Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 5	Opal/UGR 6	1.130mm 3	2.700K (112 lm/W) - Down 21W/m Up 15W/m 2	On / Off 1	White (9003) 1
	Track/UGR 9	1.690mm 5	3.000K (128 lm/W) - Down 21W/m Up 15W/m 3	Dali 2	Black (9005) 2
		2.530mm 7	4.000K (136 lm/W) - Down 21W/m Up 15W/m 4	Push 3	Custom RAL C
			5.000K (136 lm/W) - Down 21W/m Up 15W/m 5	Casambi 5	

Code: 5





Consult delivery terms and conditions.
*Create your code according to your preferences.



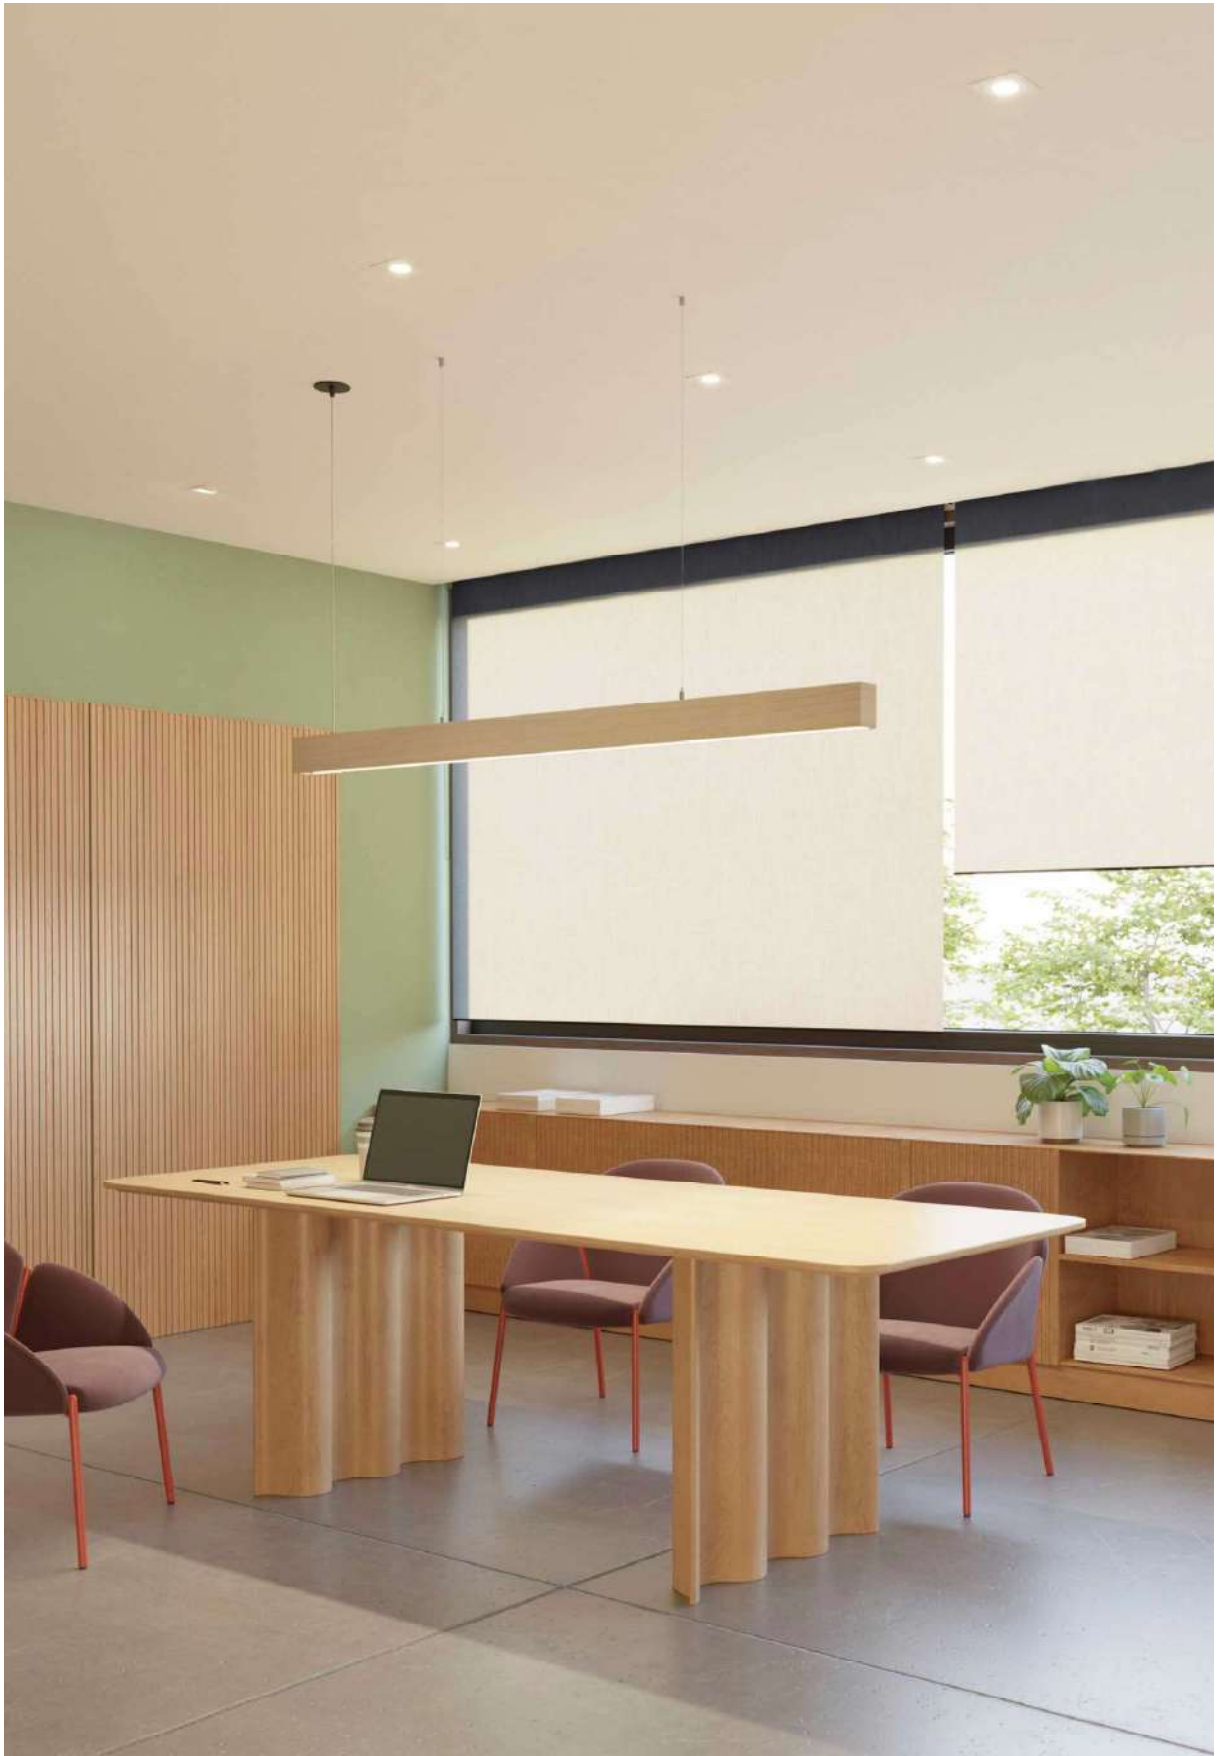

Forest



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit and power cable.



Technical Information

Power	31W / 38W / 46W / 53W
Lumens	3,472 lm - 7,208 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m		Driver	Colour	
Code	4	UGR (81°) 3	1,155mm 3	2,700K (112 lm/W) - 27W/m 2	On / Off 1	 Wood 8	
		Opal (112°) 5	1,435mm 4	3,000K (128 lm/W) - 27W/m 3	Dali 2		
			1,715mm 5	4,000K (136 lm/W) - 27W/m 4	Push 3		
			1,995mm 6	5,000K (136 lm/W) - 27W/m 5	Casambi 5		
				2,700-5,500K (105 lm/W) - 20W/m 9	Tuya 7		

Code: **4** **8**




Consult delivery terms and conditions.

*Create your code according to your preferences. CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.





Time wall sensor



*Finished luminaire. Includes power supply, base wall and end caps.

Technical Information

Power	15W / 23W / 31W
Lumens	1,680 lm - 4,216 lm
Installation	Wall
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 8	Opal (112°) 1	570mm 1	2,700K (112 lm/W) - 27W/m 2	PIR 0	White (9003) 1
		840mm 2	3,000K (128 lm/W) - 27W/m 3		Black (9005) 2
		1,130mm 3	4,000K (136 lm/W) - 27W/m 4		Gray (9006) 3
			5,000K (136 lm/W) - 27W/m 5		Custom RAL C
					Electrolytic Plating


Code: 8 1 0






Consult delivery terms and conditions.

*Create your code according to your preferences.



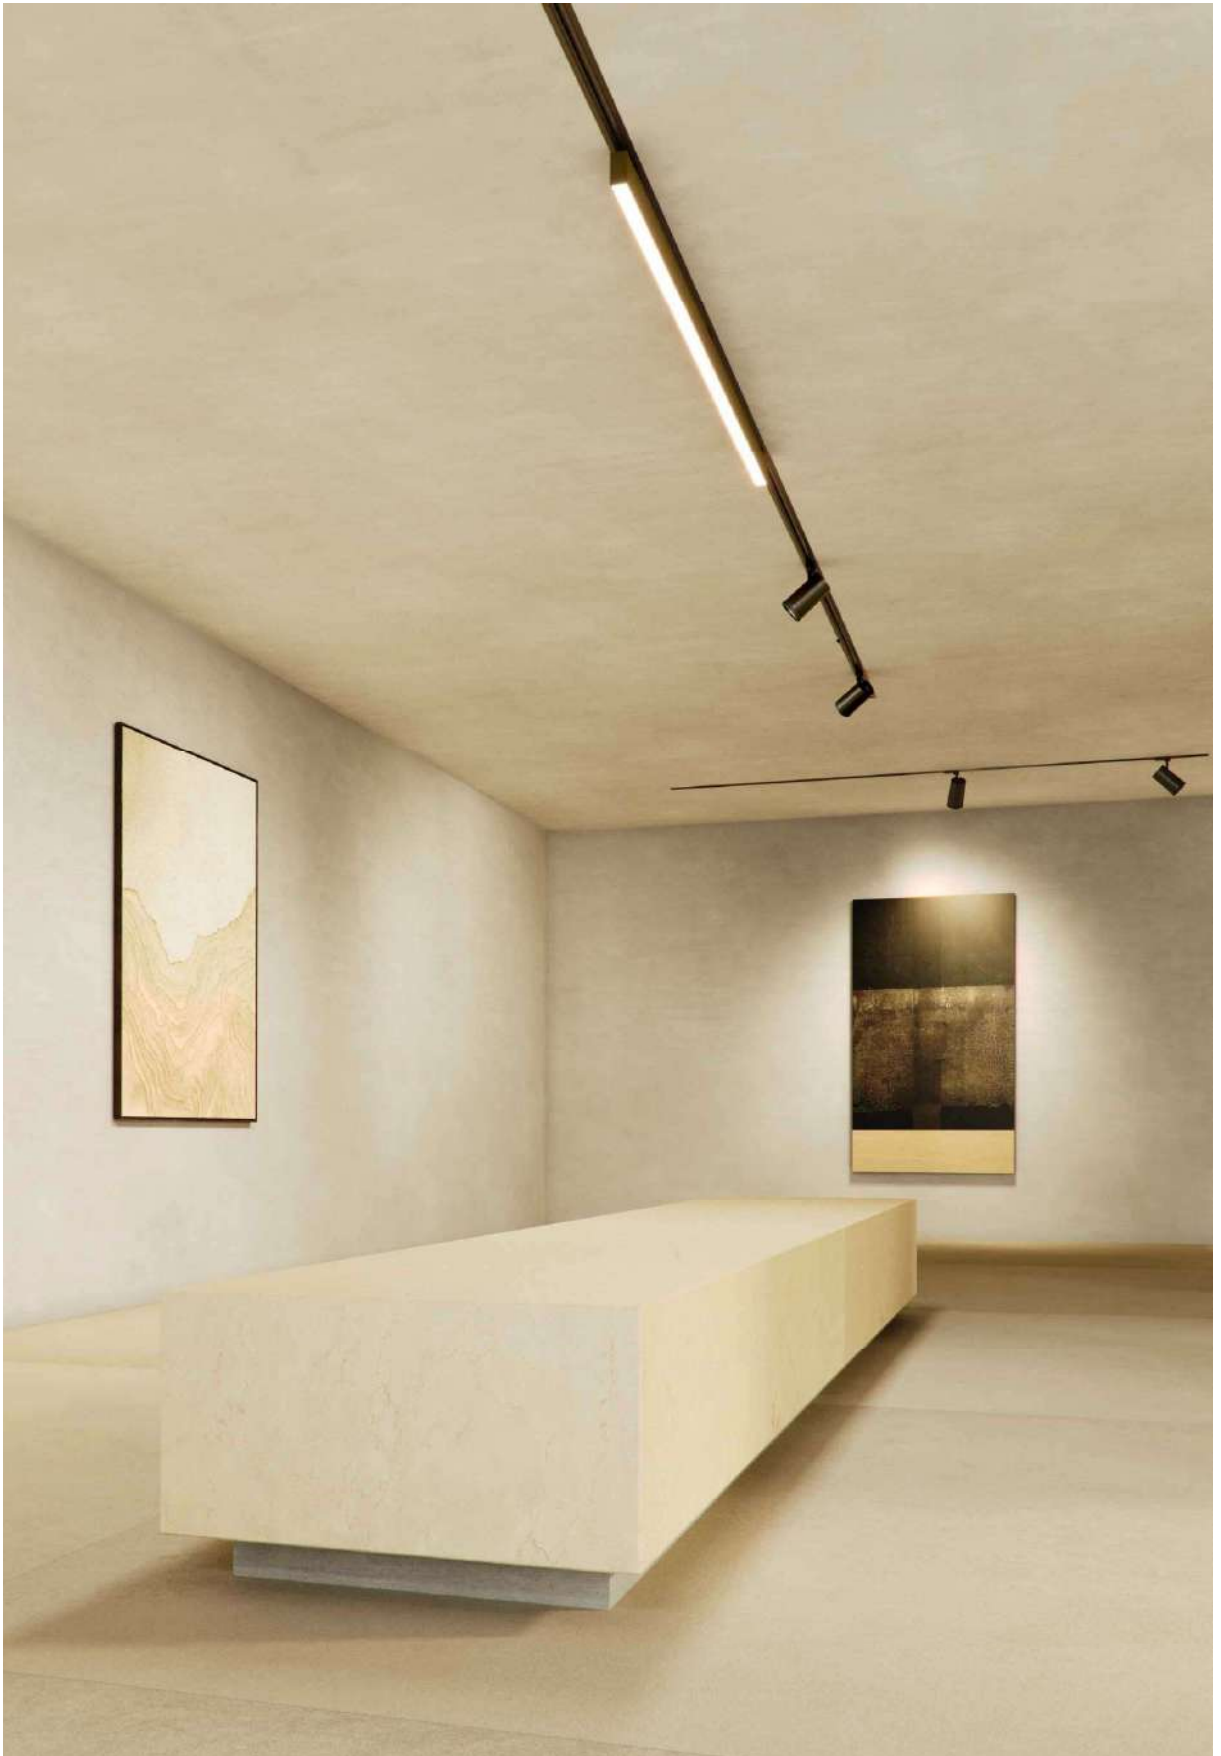

Time track



Control accessories pages 282-289.

*Finished luminaire.



Technical Information

Power	15W / 23W / 31W
Lumens	1,680 lm - 4,216 lm
Installation	Three Phase Track
Material	Aluminium
PCB	Rigid


Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 8	UGR (81°) 3	570mm 4	2,700K (112 lm/W) - 27W/m 2	On / Off 4	White (9003) 1
	Opal (112°) 5	840mm 6	3,000K (128 lm/W) - 27W/m 3	Casambi 6	Black (9005) 2
		1,130mm 8	4,000K (136 lm/W) - 27W/m 4		Custom RAL C
			5,000K (136 lm/W) - 27W/m 5		Electrolytic Plating

Code: 8



Consult delivery terms and conditions.

*Create your code according to your preferences.







Arce Pharmacy, A Coruña (Spain). Design: Sabina Arquitectos. Lighting Design: Pérez Antolín. Photography: Paco Rocha.

New

Kubo



Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, ceiling suspension, power cable and end caps.



Technical Information

Power	31W / 38W / 46W / 54W
Lumens	3.100 lm - 6.264 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 7	Opal (100°)	5	1.130mm 3 2.700K (100 lm/W) - 27W/m	On / Off 1	White (9003) 1
			1.410mm 4 3.000K (105 lm/W) - 27W/m	Dali 2	Black (9005) 2
			1.690mm 5 4.000K (111 lm/W) - 27W/m	Push 3	Custom RAL C
			1.970mm 6 5.000K (116 lm/W) - 27W/m	Casambi 5	Electrolytic Plating
			RGB-W (100 lm/W) - 20W/m	Tuya 7	
			2.700-5.500K (105 lm/W) - 40W/m		




Code: 7 5



*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



Kubo E



Control accessories pages 282-289.

*Finished luminaire. Includes driver, spring clips, power cable and end caps.

Technical Information

Power	31W / 38W / 46W / 54W
Lumen	3,100 lm - 6,264 lm
Installation	Recessed
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m		Driver	Colour
Code 5	Opal (100°)	5	1.130mm 3	2,700K (100 lm/W) - 27W/m 2	On / Off 1	White (9003) 1
			1.410mm 4	3,000K (105 lm/W) - 27W/m 3	Dali 2	Black (9005) 2
			1.690mm 5	4,000K (111 lm/W) - 27W/m 4	Push 3	Custom RAL C
			1.970mm 6	5,000K (116 lm/W) - 27W/m 5	Casambi 5	
				RGB-W (100 lm/W) - 20W/m 8	Tuya 7	
				2,700-5,500K (105 lm/W) - 40W/m 9		


Code: 5 5



Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.



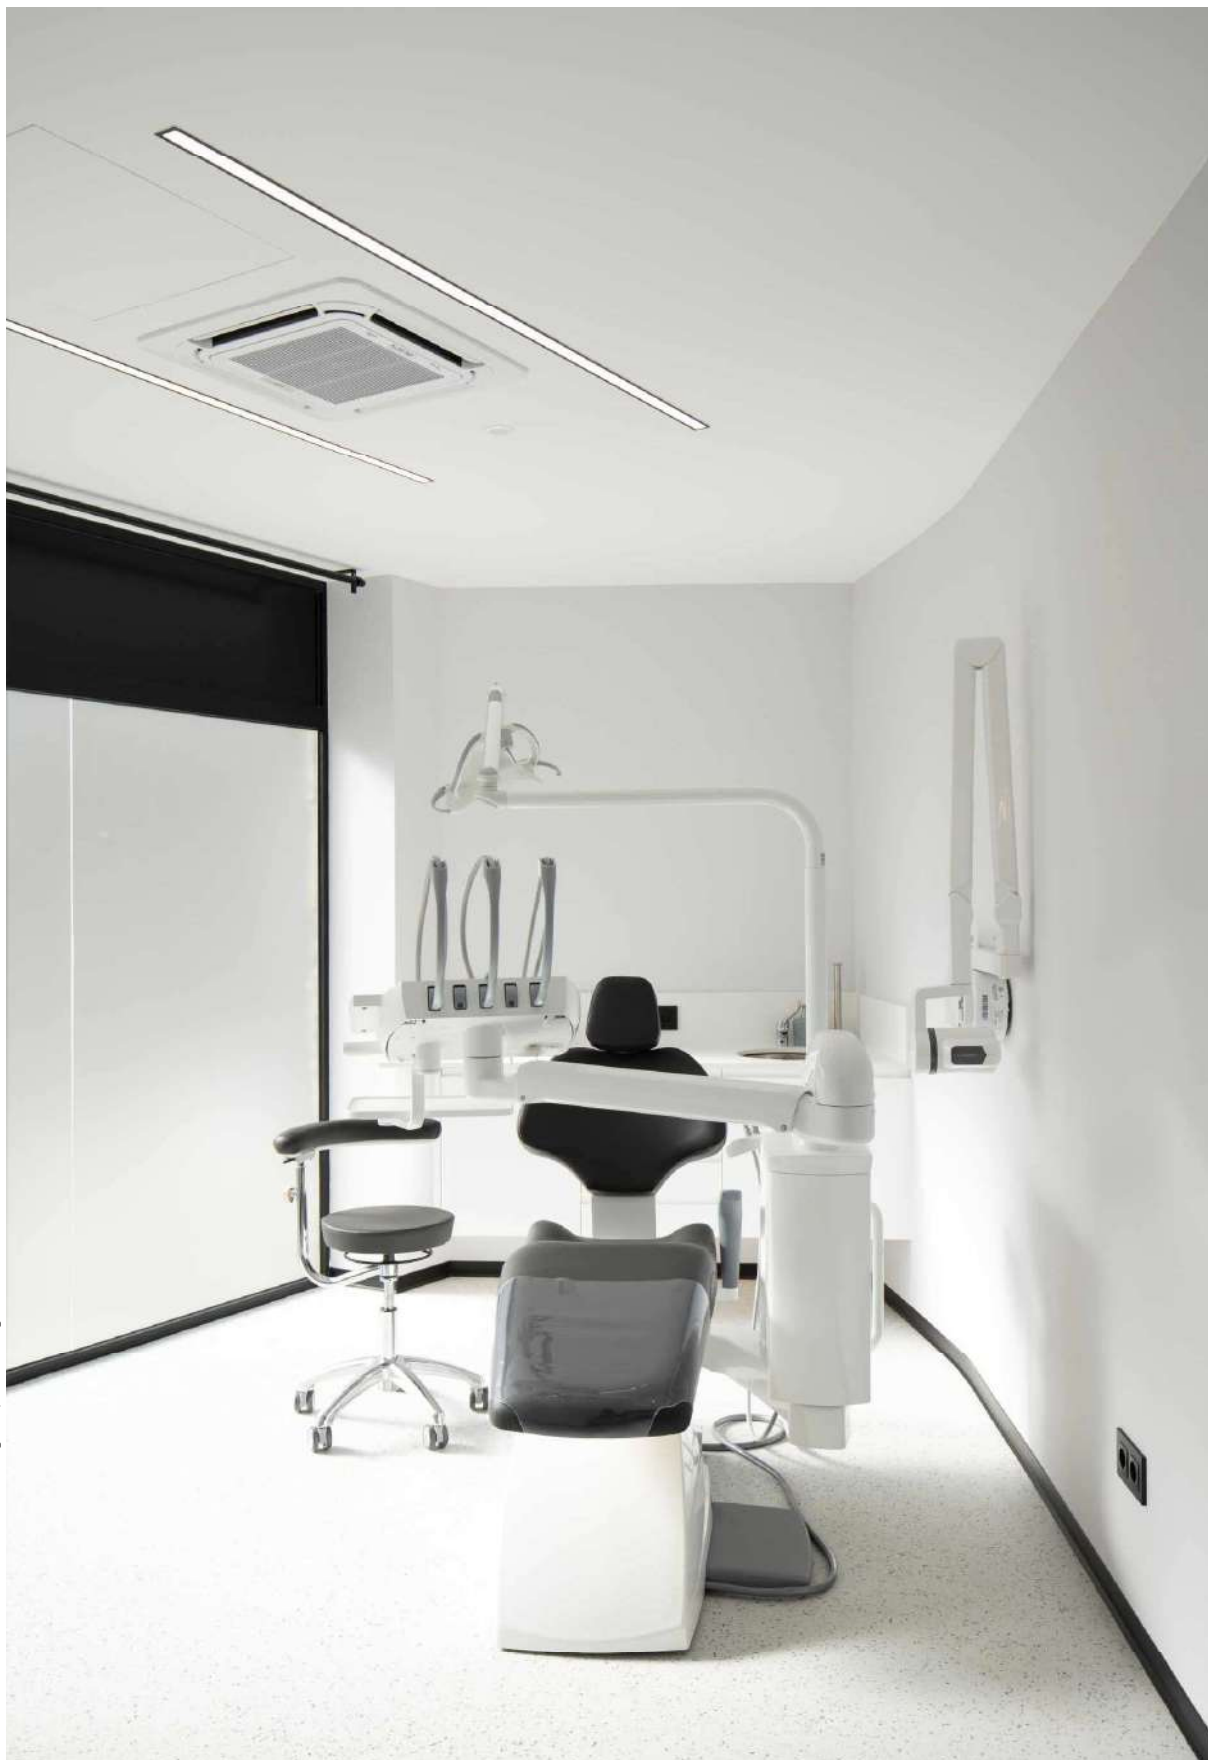

Dental Clinic Eva Flores, El Prat de Llobregat (Spain), Design: Meumstudio.



New

Mirrow



Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.




Technical Information

Power	85W / 94W
Lumens	8.500 lm - 10.434 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 7	Opal 8	600x600mm 2	2.700K (100 lm/W) - 25W/m 2	On / Off 1	White (9003) 1
		600x1,050mm 9	3.000K (105 lm/W) - 25W/m 3	Dali 2	Black (9005) 2
			4.000K (111 lm/W) - 25W/m 4	Push 3	Custom RAL C
			RGB-W (100 lm/W) - 20W/m 8	Casambi 5	Electrolytic Plating
			2.700-5,500K (105 lm/W) - 22W/m 9	Tuya 7	

Code: 7 8



Consult delivery terms and conditions.


*Create your code according to your preferences. RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.





New

Tax

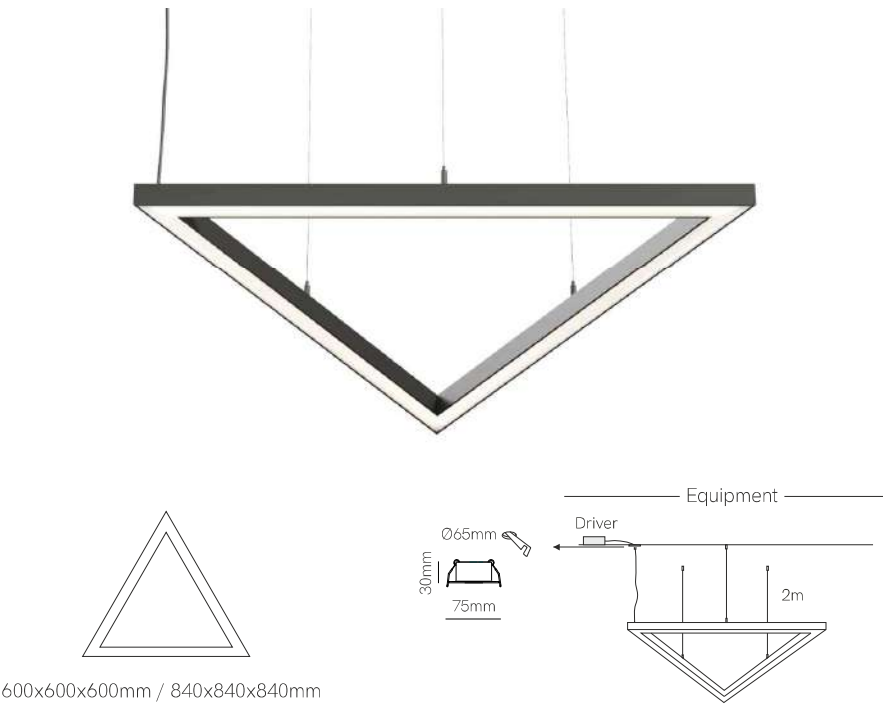

Control accessories pages 282-289.

*Finished luminaire. Includes driver, suspension kit, power cable and end caps.



Technical Information

Power	52W / 64W
Lumens	5.200 lm - 7.104 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid / RGB-W Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 7	Opal 2	600mm 4	2.700K (100 lm/W) - 25W/m 2	On / Off 1	White (9003) 1
		840mm 8	3.000K (105 lm/W) - 25W/m 3	Dali 2	Black (9005) 2
			4.000K (111 lm/W) - 25W/m 4	Push 3	Custom RAL C
			RGB-W (100 lm/W) - 20W/m 8	Casambi 5	Electrolytic Plating
			2.700-5.500K (105 lm/W) - 22W/m 9	Tuya 7	

Code: 7 2




Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





Filter



Equipment

Ø75x300mm



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	32W - 120W
Lumens	3,200 lm - 13,320 lm
Installation	Pendant
Material	Aluminium
Material	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 3	Opal (360°) 7	800mm 3	2,700K (100 lm/W) - 40W/m 2	On / Off 1	White (9003) 1
		1,200mm 5	3,000K (105 lm/W) - 40W/m 3	Dali 2	Black (9005) 2
		1,600mm 7	4,000K (111 lm/W) - 40W/m 4	Push 3	Custom RAL C
		2,000mm 9	RGB (58 lm/W) - 60W/m 7	Casambi 5	
				Tuya 7	


Code: 3 7





Consult delivery terms and conditions.

*Create your code according to your preferences. RGB only works with driver 5 Casambi and 7 Tuya.



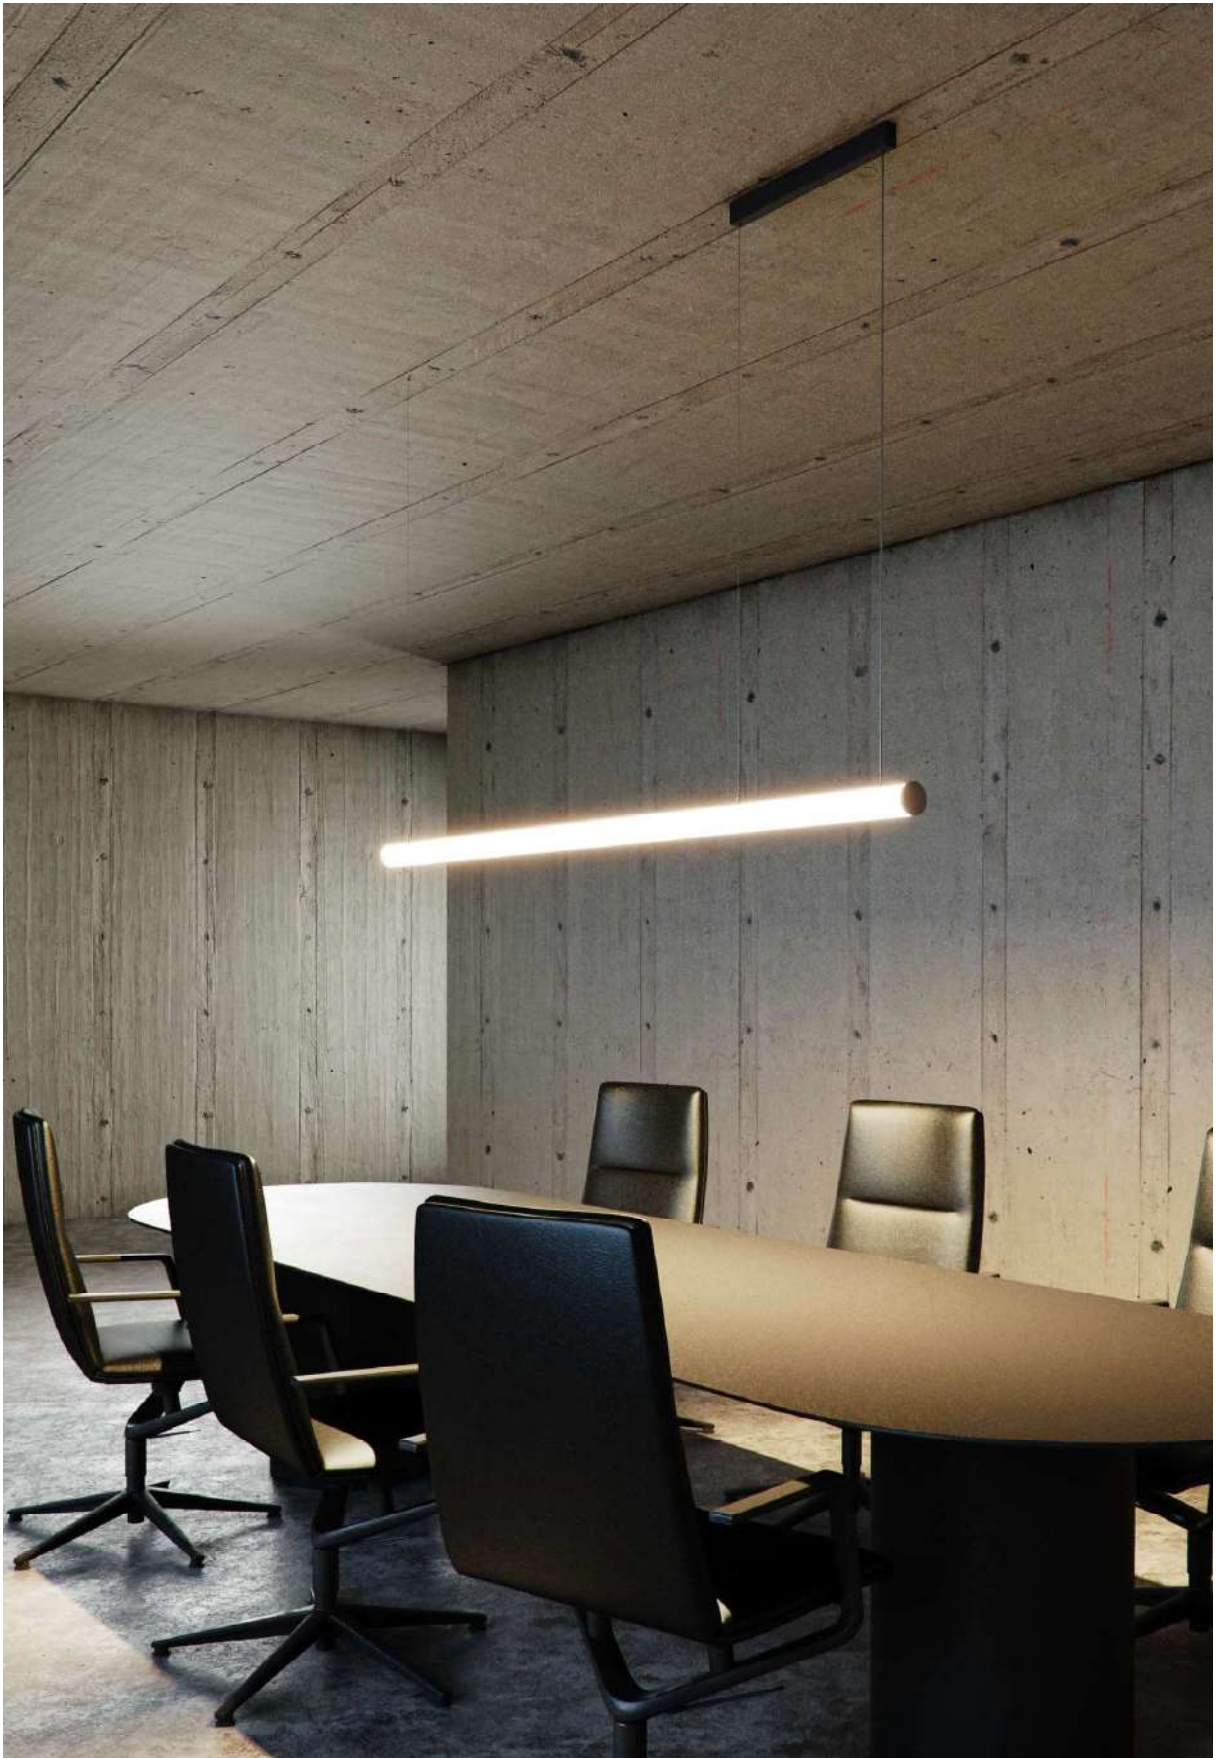

Tubi



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps (aluminium).



Technical Information

Power	35W / 44W / 53W / 62W
Lumens	3,500 lm - 8,432 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 7	Opal (270°) 1	1.130mm 3	2,700K (100 lm/W) - 31W/m 2	On / Off 1	☐ White (9003) 1
		1.410mm 4	3,000K (128 lm/W) - 31W/m 3	Dali 2	☒ Black (9005) 2
		1.690mm 5	4,000K (136 lm/W) - 31W/m 4	Push 3	☒ Custom RAL C
		1.970mm 6	5,000K (136 lm/W) - 31W/m 5	Casambi 5	
			RGB-W (100 lm/W) - 31W/m 8	Tuya 7	
			2,700-5,500K (105 lm/W) - 31W/m 9		

Code: **7** **1** ☐ ☐ ☐ ☐ ☐




*Create your code according to your preferences. RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya. Consult delivery terms and conditions.





New

Tubi wall

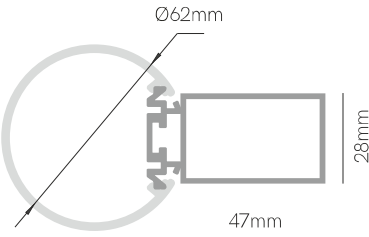

Control accessories pages 282-289.

*Finished luminaire. Includes base wall and end caps (aluminium).



Technical Information

Power	35W / 44W / 53W
Lumens	3.500 lm - 5.883 lm
Installation	Wall
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 7	Opal (270°) 9	1.130mm 3	2.700K (100 lm/W) - 31W/m 2	On / Off 1	White (9003) 1
		1.410mm 4	3.000K (105 lm/W) - 31W/m 3	Dali 2	Black (9005) 2
		1.690mm 5	4.000K (111 lm/W) - 31W/m 4	Push 3	Custom RAL C
			RGB-W (100 lm/W) - 31W/m 8	Casambi 5	
			2.700-5.500K (105 lm/W) - 31W/m 9	Tuya 7	

Code: 7 9




Consult delivery terms and conditions.

*Create your code according to your preferences, RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.







Grip



Opal



Angle 30° / Transparent



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.



Technical Information

Power	26W / 33W / 39W / 46W
Lumens	2,522 lm - 4,968 lm
Installation	Pendant
Material	Aluminium
PCB	Flex


Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 2	Opal 4	1,130mm 3	2,700K (97 lm/W) - 22W/m 2	On / Off 1	Black (9005) 2
	30° / Transparent 8	1,410mm 4	3,000K (103 lm/W) - 22W/m 3	Dali 2	Custom RAL C
		1,690mm 5	4,000K (108 lm/W) - 22W/m 4	Push 3	
		1,970mm 6	RGB (100 lm/W) - 20W/m 8	Casambi 5	
			2,700-5,500K (105 lm/W) - 20W/m 9	Tuya 7	

Code: 2




*Consult delivery terms and conditions.
*Create your code according to your preferences. RGB and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.



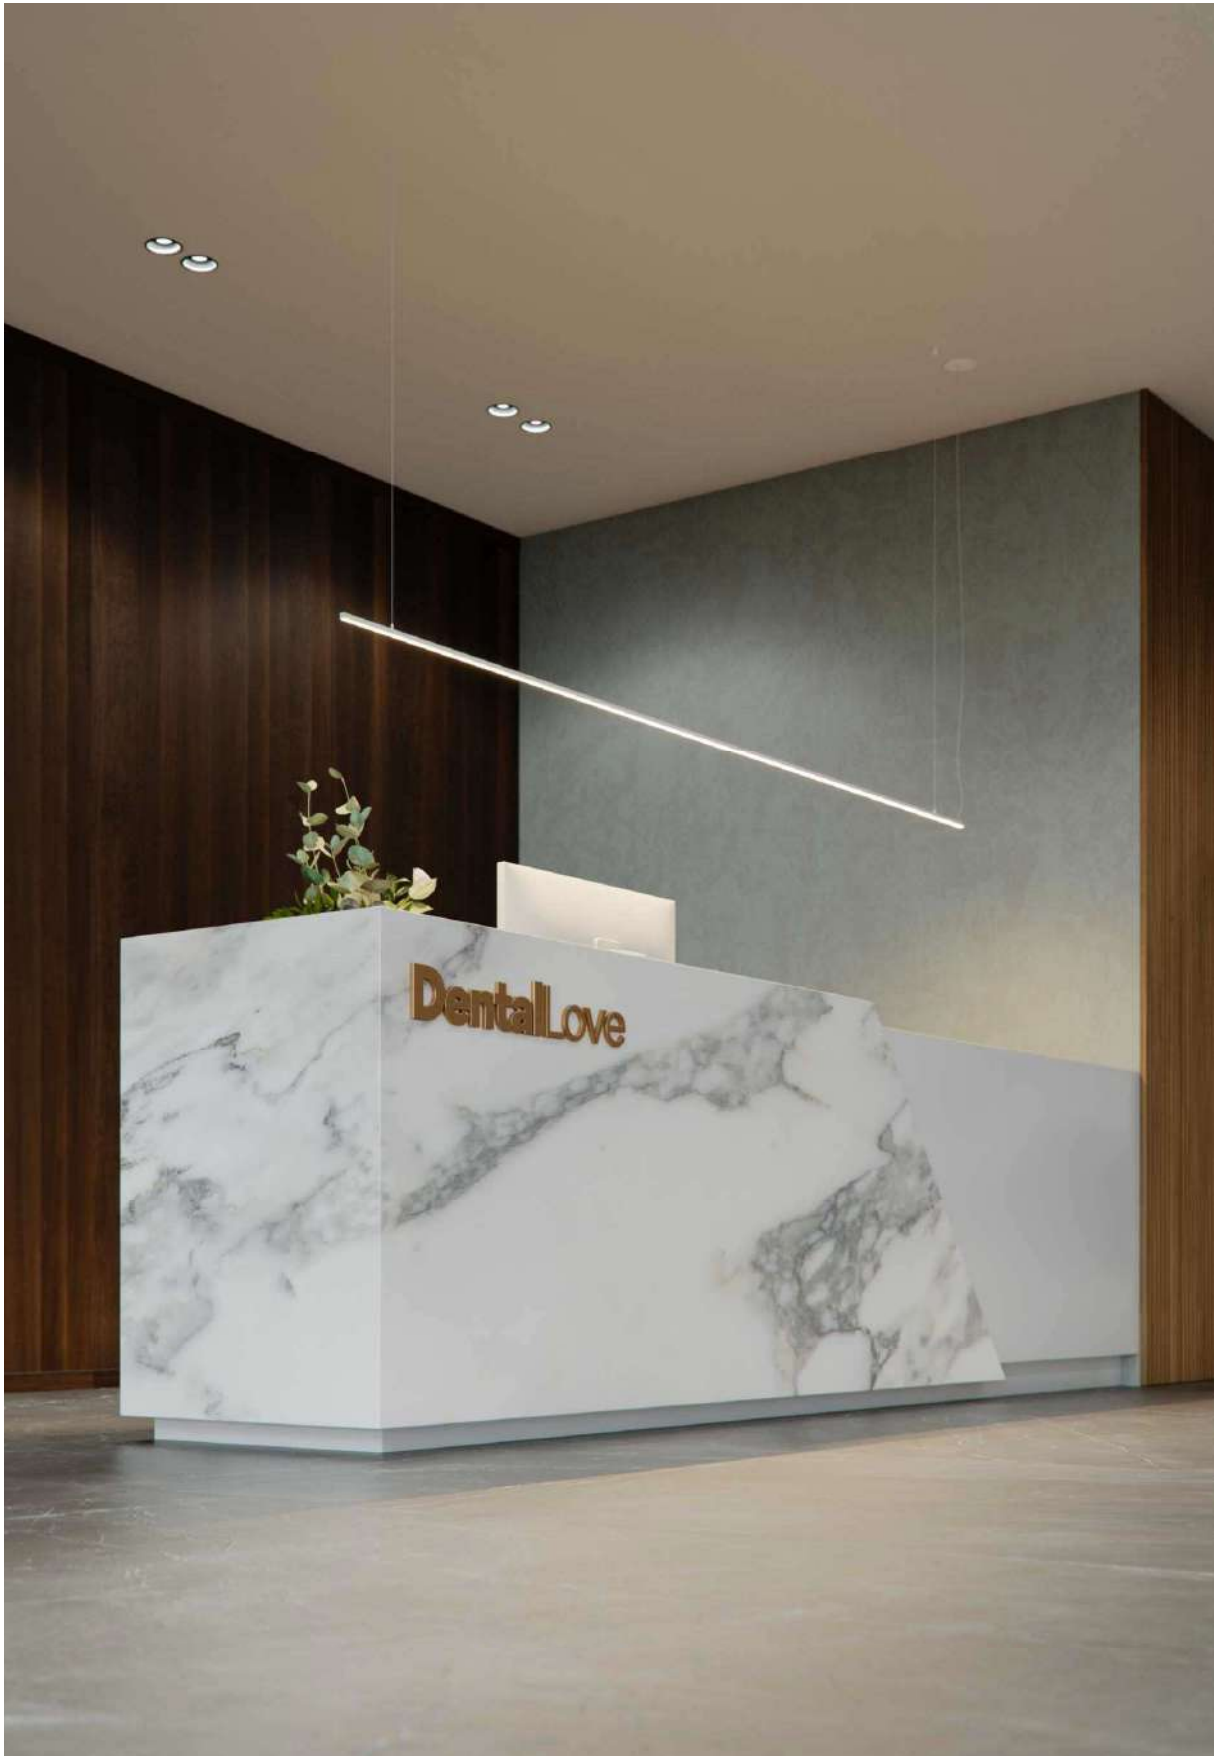

New

Nyneto

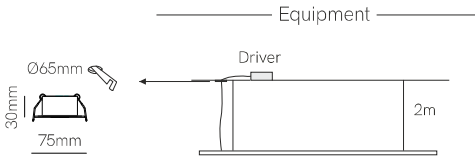

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.



Technical Information

Power	16W / 20W / 24W / 28W
Lumens	896 lm - 1,848 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 8	Opal 8	1.120mm 3	2.700K (56 lm/W) - 15W/m 2	On / Off 1	White (9003) 1
		1.410mm 4	3.000K (61 lm/W) - 15W/m 3	Dali 2	Black (9005) 2
		1.690mm 5	4.000K (66 lm/W) - 15W/m 4	Push 3 ①	Custom RAL C
		1.970mm 6		Casambi 5	
				Tuya 7	

Code: 8 8



① Consult delivery terms and conditions.



*Create your code according to your preferences.





New

Minimus

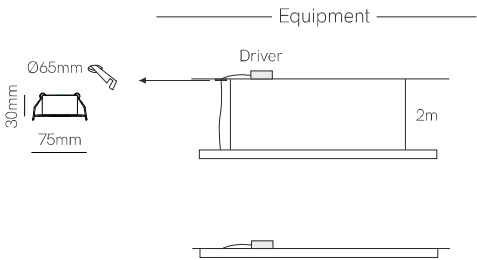

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.



Technical Information

Power	25W / 31W / 37W / 43W
Lumens	2,425 lm - 4,644 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 5	Opal prism (100°) 8	1,170mm 2	2,700K (97 lm/W) - 22W/m 2	On / Off 1	White (9003) 1
		1,420mm 4	3,000K (103 lm/W) - 22W/m 3	Dali 2	Black (9005) 2
		1,720mm 6	4,000K (108 lm/W) - 22W/m 4	Push 3 ①	Custom RAL C
		1,970mm 8		Casambi 5	
				Tuya 7	


Code: 5 8




① Consult delivery terms and conditions.

*Create your code according to your preferences.




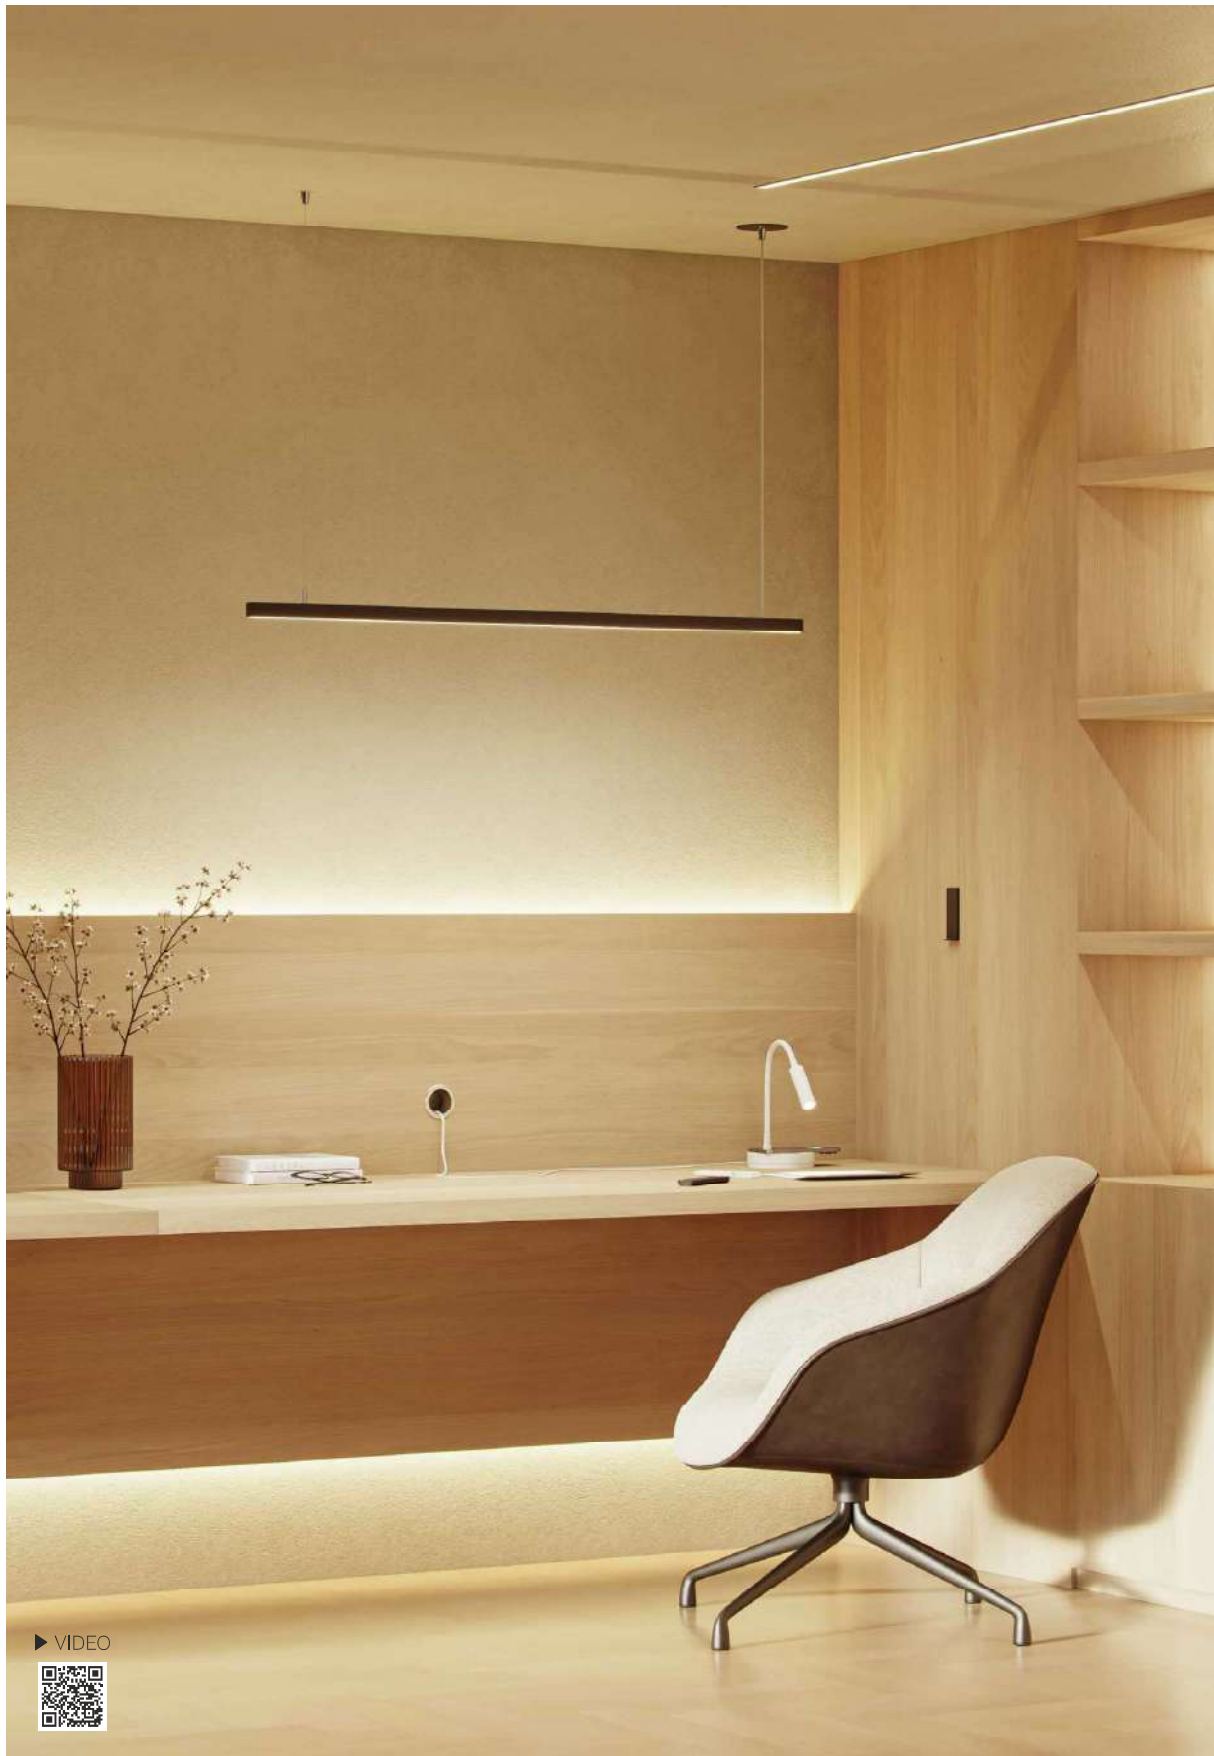

Dau



Equipment



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, ceiling suspension, power cable and end caps.



Technical Information

Power	18W / 23W / 26W / 30W
Lumens	1.800 lm - 3.420 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal (110°) 5	1.170mm 3	2,700K (100 lm/W) - 15W/m 2	On / Off 1	White (9003) 1
		1.420mm 4	3,000K (105 lm/W) - 15W/m 3	Dali 2	Black (9005) 2
		1.720mm 5	4,000K (111 lm/W) - 15W/m 4	Push 3	Custom RAL C
		1.970mm 6	5,000K (114 lm/W) - 15W/m 5	Casambi 5	
			RGB-W (100 lm/W) - 20W/m 8	Tuya 7	
			2,700-5,500K (105 lm/W) - 20W/m 9		

Code: 1 5





Consult delivery terms and conditions.

*Create your code according to your preferences, RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.



Dau E



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, spring clips, power cable and end caps.

Technical Information

Power	18W / 23W / 26W / 30W
Lumens	1.800 lm - 3.420 lm
Installation	Recessed
Material	Aluminium
PCB	Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal (110°) 6	1.170mm 3	2.700K (100 lm/W) - 15W/m 2	On / Off 1	☐ White (9003) 1
		1.420mm 4	3.000K (105 lm/W) - 15W/m 3	Dali 2	☒ Black (9005) 2
		1.720mm 5	4.000K (111 lm/W) - 15W/m 4	Push 3	☒ Custom RAL C
		1.970mm 6	5.000K (114 lm/W) - 15W/m 5	Casambi 5	
			RGB-W (100 lm/W) - 20W/m 8	Tuya 7	
			2.700-5.500K (105 lm/W) - 20W/m 9		

Code: **1** **6** ☐ ☐ ☐ ☐ ☐



Consult delivery terms and conditions.


*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.









Square



530 x 530mm



530 x 1.030mm



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.




Technical Information

Power	43W / 62W
Lumens	4,300 lm - 6,882 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 3	Opal (110°) 3	530 x 530mm 4	2,700K (100 lm/W) - 20W/m 2	On / Off 1	White (9003) 1
		530 x 1,030mm 8	3,000K (105 lm/W) - 20W/m 3	Push 3	Black (9005) 2
			4,000K (111 lm/W) - 20W/m 4	Casambi 5	Matt Gold 4
			RGB-W (100 lm/W) - 20W/m 8	Tuya 7	Silver 5
			2,700-5,500K (105 lm/W) - 20W/m 9		Custom RAL C

Code: 3 3





*Create your code according to your preferences, RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.





New

Zero in



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal 2	400mm 2	2.700K (60 lm/W) - 22W/m 2	On / Off 1	White (9003) 1
		700mm 4	3.000K (66 lm/W) - 22W/m 3	Dali 2	Black (9005) 2
		1.000mm 6	4.000K (72 lm/W) - 22W/m 4	Push 3	Matt Gold 4
		1.400mm 8	RGB-W (50 lm/W) - 22W/m 8	Casambi 5	Silver 5
			2.700-5.500K (70 lm/W) - 22W/m 9	Tuya 7	Custom RAL C


Code: 1 2



Consult delivery terms and conditions.


*Create your code according to your preferences, RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



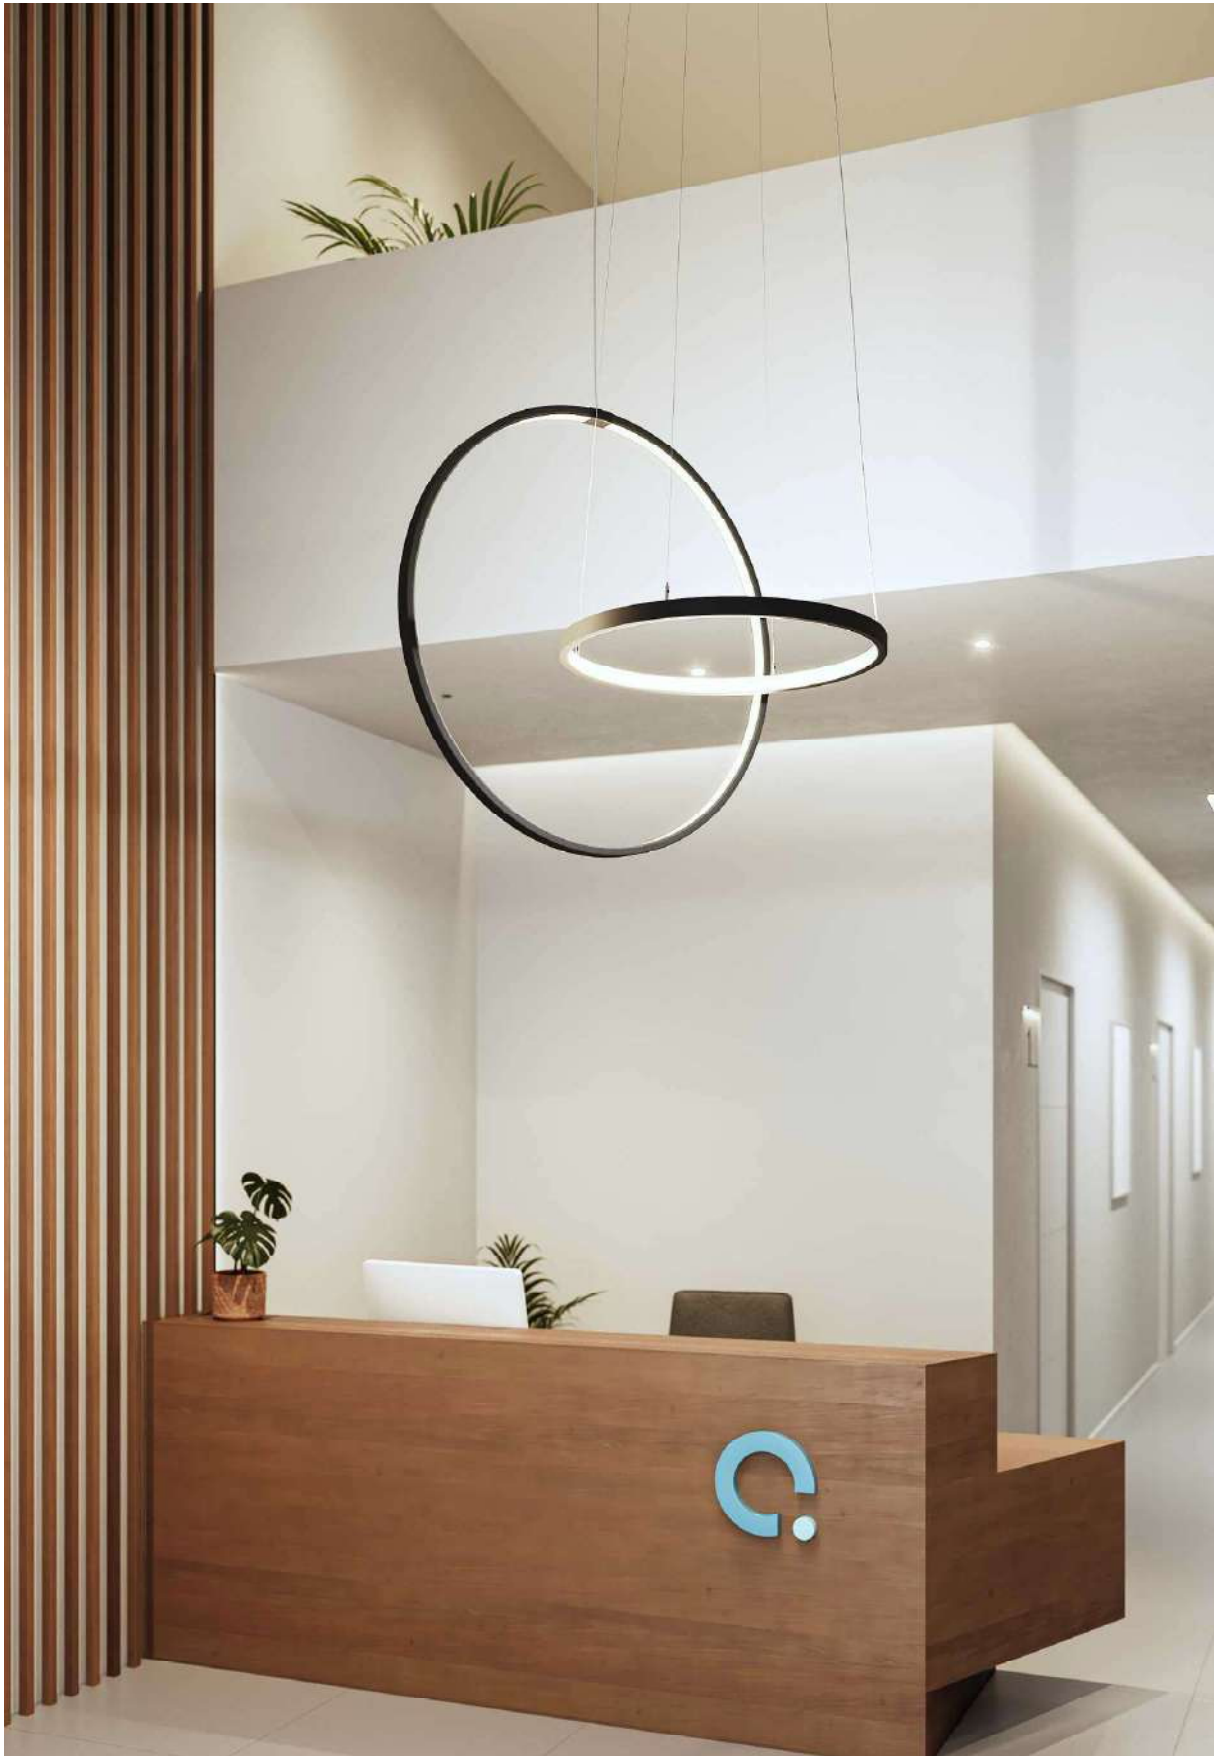

New

Circus

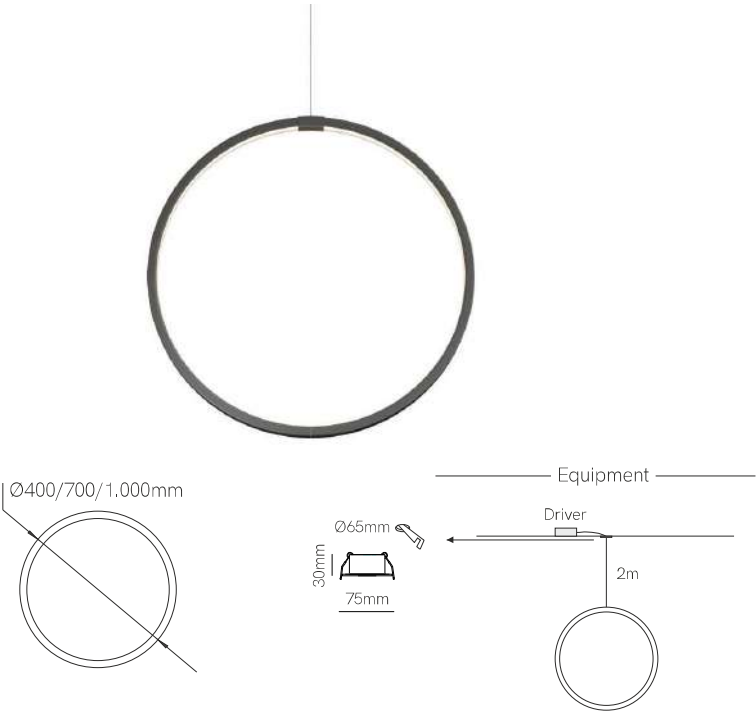

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	26W / 44W / 63W
Lumens	1.560 lm - 4.536 lm
Installation	Pendant
Material	Aluminium
Material	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal 0	400mm 2	2,700K (60 lm/W) - 22W/m 2	On / Off 1	White (9003) 1
		700mm 4	3,000K (66 lm/W) - 22W/m 3	Dali 2	Black (9005) 2
		1,000mm 6	4,000K (72 lm/W) - 22W/m 4	Push 3	Matt Gold 4
			RGB-W (50 lm/W) - 22W/m 8	Casambi 5	Silver 5
			2,700-5,500K (70 lm/W) - 22W/m 9	Tuya 7	Custom RAL C
					Electrolytic Plating

Code: 1 0



*Create your code according to your preferences, RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya. Consult delivery terms and conditions.





New

Tundra



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	56W / 81W
Lumens	3,360 lm - 5,832 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code		Diffuser		Size	CCT (lm/W) - Power/m		Driver		Colour		
Code	8	Opal	6	500 x 1,000mm	4	2,700K (60 lm/W) - 22W/m	2	On / Off	1	 White (9003)	1
				700 x 1,400mm	6	3,000K (66 lm/W) - 22W/m	3	Dali	2	 Black (9005)	2
						4,000K (72 lm/W) - 22W/m	4	Push	3	 Matt Gold	4
						RGB-W (50 lm/W) - 22W/m	8	Casambi	5	 Silver	5
						2,700-5,500K (70 lm/W) - 22W/m	9	Tuya	7	 Custom RAL	C
										 Electrolytic Plating	

Code: 8 6



Consult delivery terms and conditions.



*Create your code according to your preferences. RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.





New

Zero out



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	26W / 44W / 63W / 96W
Lumens	1.560 lm - 6.912 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal 4	400mm 2	2.700K (60 lm/W) - 22W/m 2	On / Off 1	White (9003) 1
		700mm 4	3.000K (66 lm/W) - 22W/m 3	Dali 2	Black (9005) 2
		1.000mm 6	4.000K (72 lm/W) - 22W/m 4	Push 3	Matt Gold 4
		1.400mm 8	RGB-W (50 lm/W) - 22W/m 8	Casambi 5	Silver 5
			2.700-5.500K (70 lm/W) - 22W/m 9	Tuya 7	Custom RAL C

Code: 1 4



Consult delivery terms and conditions.


*Create your code according to your preferences, RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.





New

Zero XL

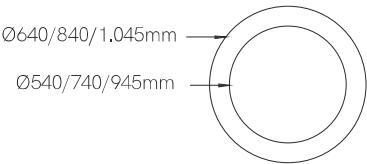

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	78W / 105W / 131W
Lumens	5,850 lm - 10,349 lm
Installation	Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal 3	640mm 2	3,000K (75 lm/W) - 39W/m 3	On / Off 1	White (9003) 1
		840mm 5	4,000K (79 lm/W) - 39W/m 4	Dali 2	Black (9005) 2
		1,045mm 6		Push 3	Gray (9006) 3
				Casambi 5	

Code: 1 3



*Create your code according to your preferences.











Grand Cafe Lust, Nijkerk (The Netherlands), Design: MoreSenz Albert van den Akker.

Zero direct

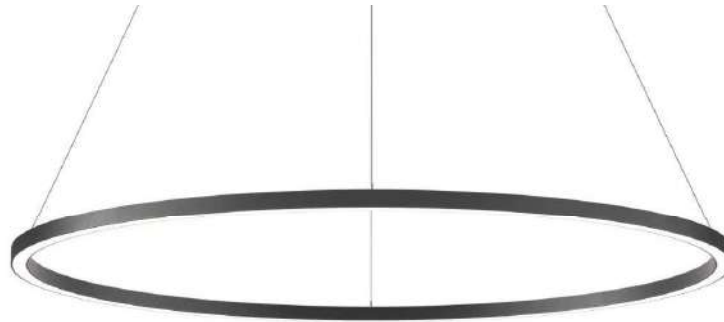


Ø520/800/1.200/1.500/3.000mm




Equipment

Ø250/280x41mm



Ø520/800/1.200/1.500mm

Ø80x29mm



Ø3.000mm

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	35W / 55W / 75W / 94W / 189W
Lumens	2.100 lm - 14.742 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal 7	520mm 0	2.700K (66 lm/W) - 22W/m 2	On / Off 1	White (9003) 1
		800mm 2	3.000K (72 lm/W) - 22W/m 3	Dali 2	Black (9005) 2
		1.200mm 6	4.000K (78 lm/W) - 22W/m 4	Push 3	Matt Gold 4
		1.500mm 8	2.700-5.500K (70 lm/W) - 22W/m 9	Casambi 5	Silver 5
		3.000mm 9		Tuya 7	Custom RAL C
		Custom C			Electrolytic Plating


Code: 1 7




Consult delivery terms and conditions.

*Create your code according to your preferences. RGB-W and CCT 2.700-5.500K only works with driver 5 Casambi and 7 Tuya.



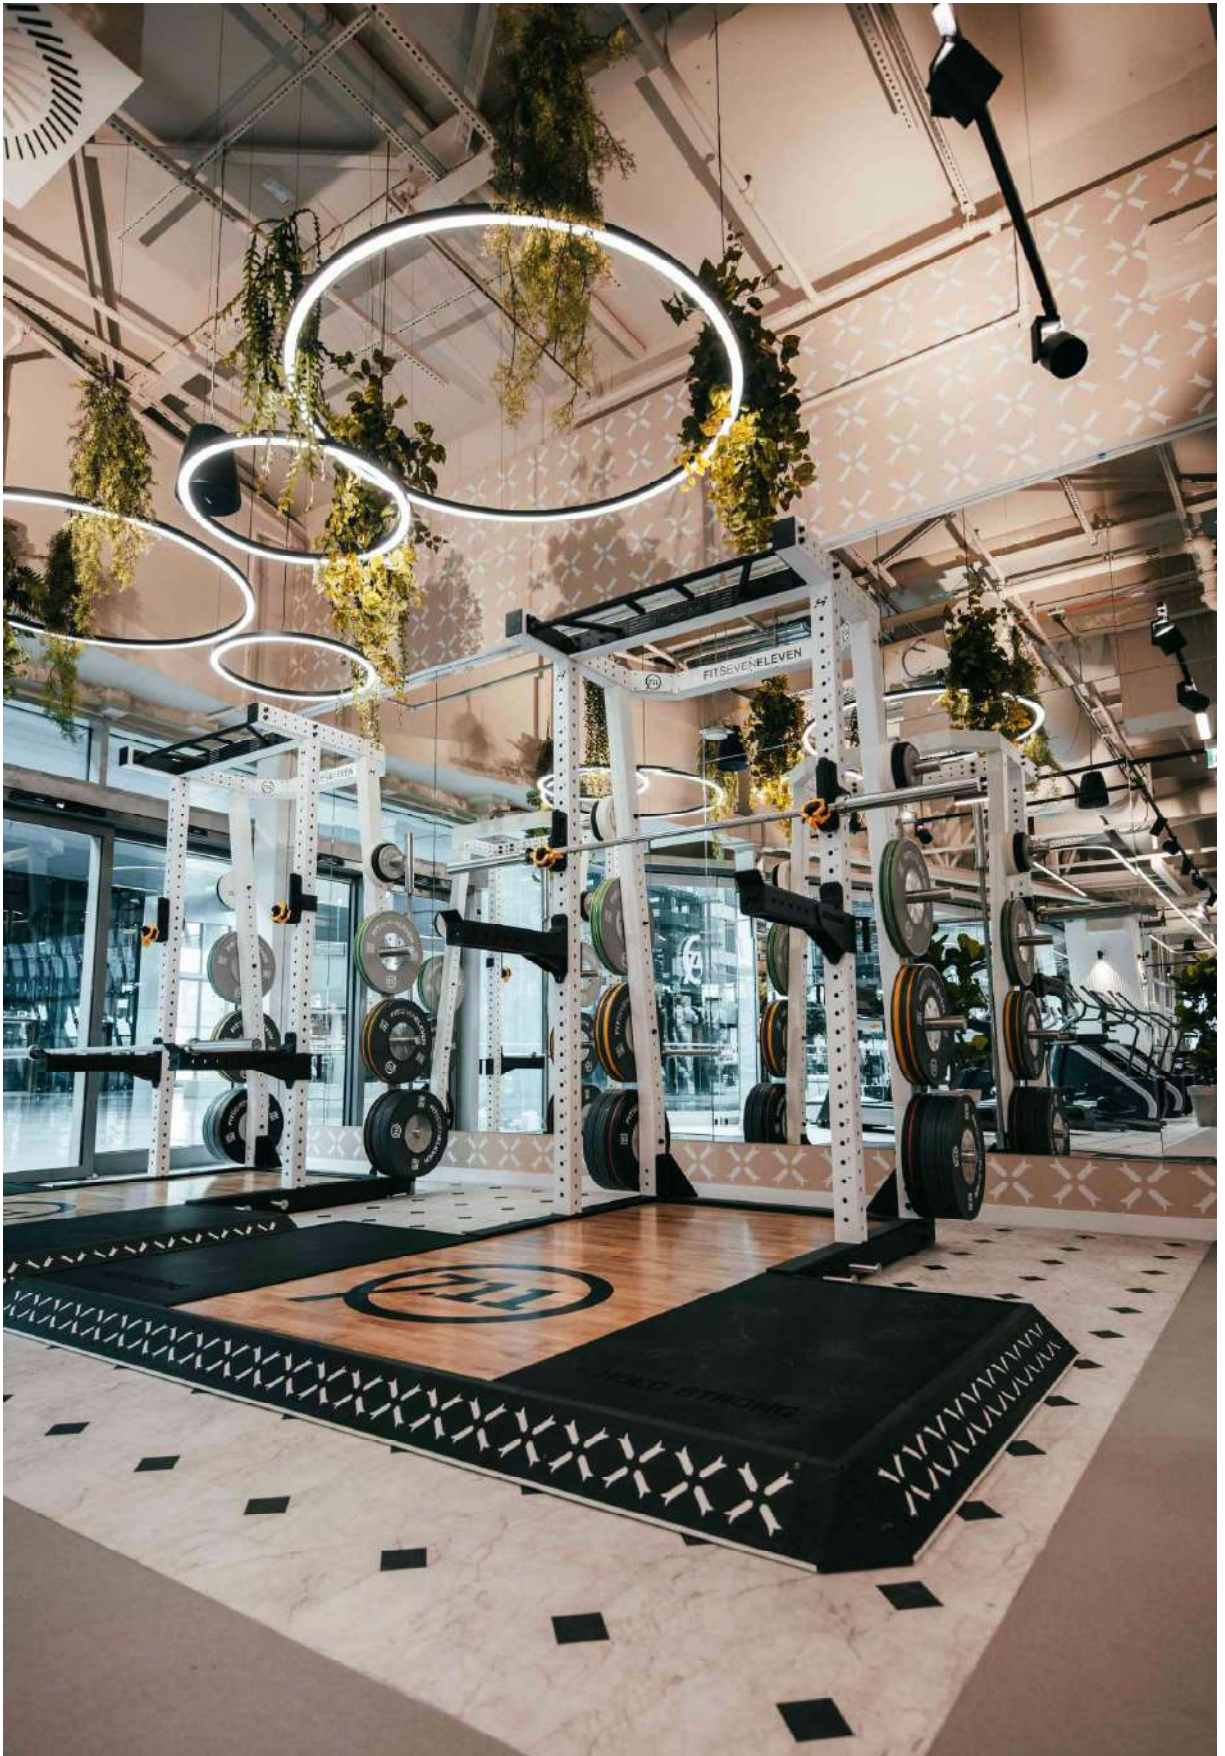

FITSEVENELEVEN®, Club Frankfurt Airport.

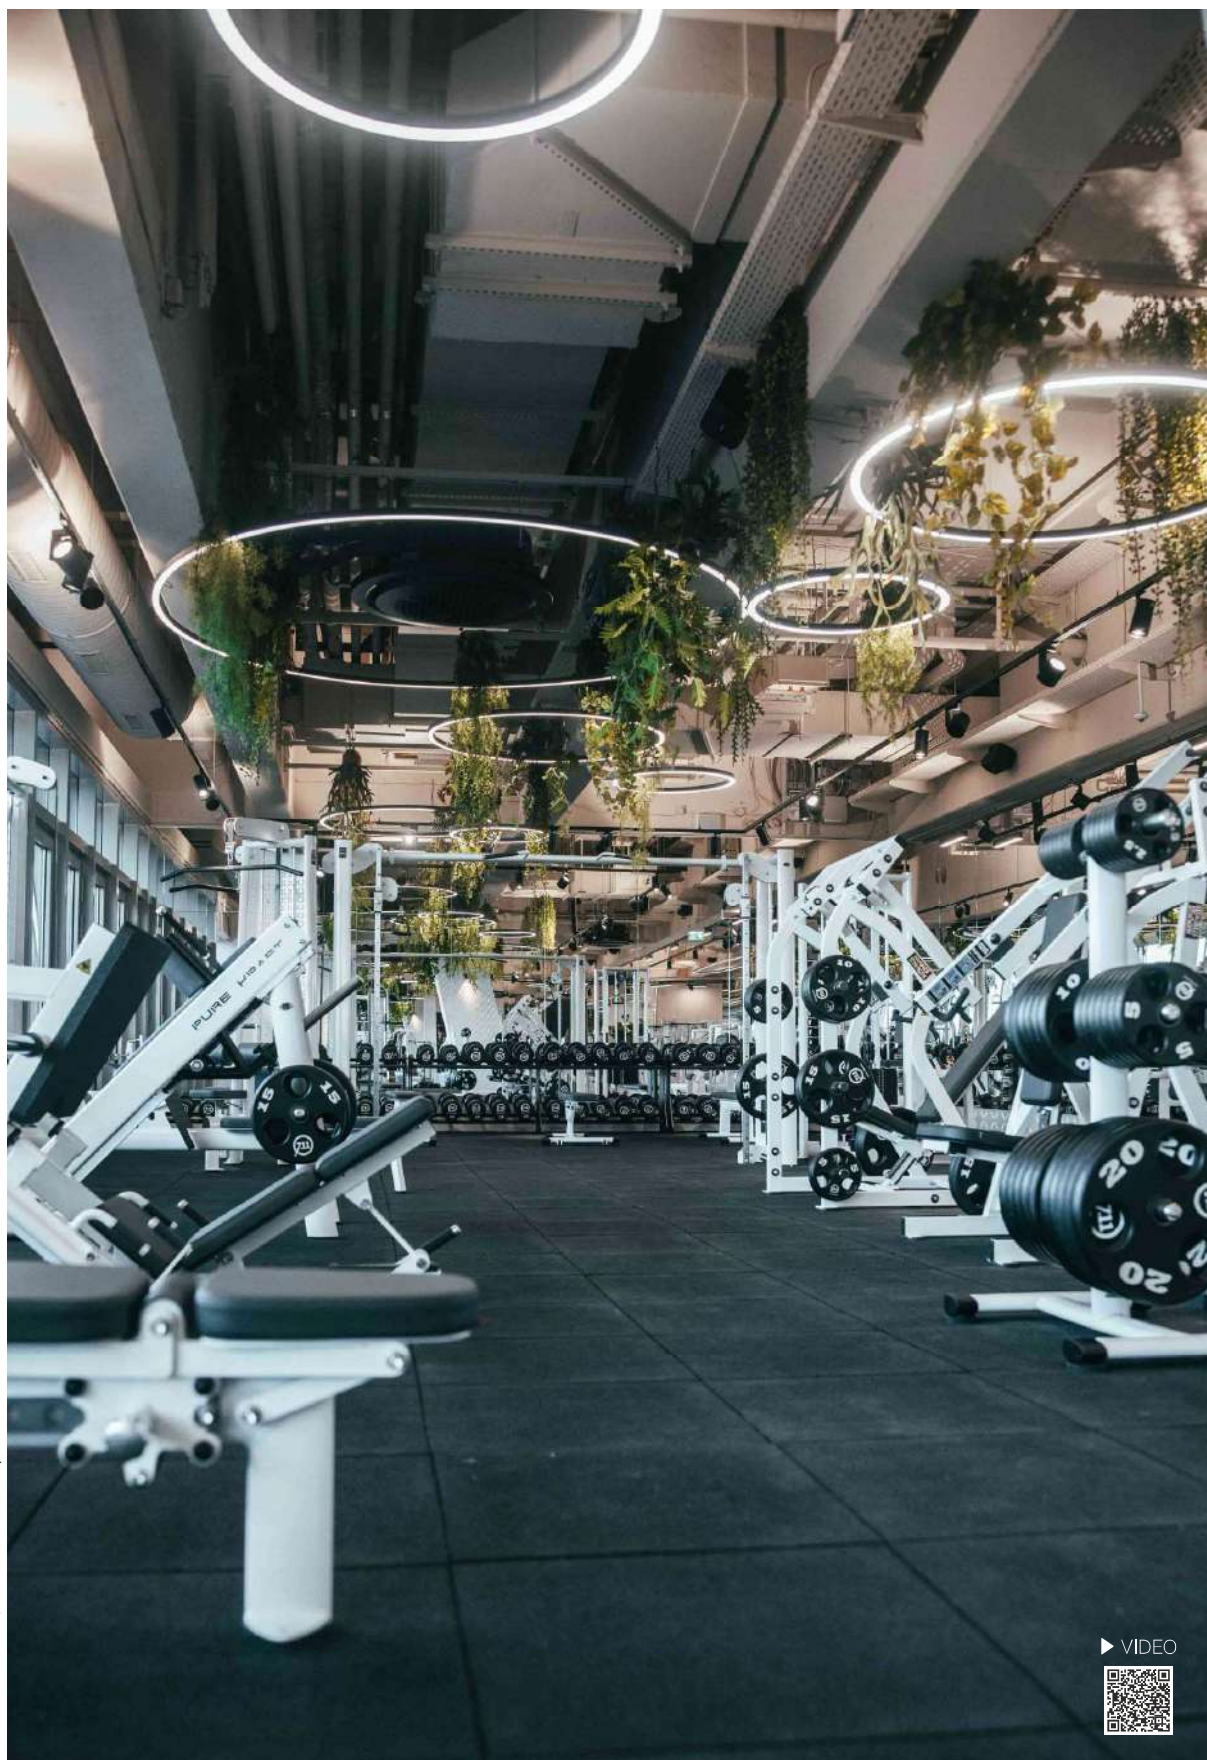

FITSEVENELEVEN®, Club Frankfurt Airport.


▶ VIDEO



Zero Design

Zero 45°

Code	Diffuser	Size	CCT (lm/W) - Power/m	Voltage	Colour
Code	Z	Opal 1	800mm 1	24VDC	0
		1.500mm 4	2.700K (66 lm/w) - 22W/m 2		☐ White (9003) 1
		3.000mm 7	3.000K (72 lm/w) - 22W/m 3		☐ Black (9005) 2
			4.000K (78 lm/w) - 22W/m 4		☒ ☐ Matt Gold 4
			CCT (70 lm/w) - 22W/m 9		☒ ☐ Silver 5
					☒ ☐ Custom RAL C
					☒ ☐ Electrolytic Plating




900 - 1,500 - 3,000mm

Code: **Z 1** ☐ ☐ ☐ **0** ☐

Zero 90°

Code	Diffuser	Size	CCT (lm/W) - Power/m	Voltage	Colour
Code	Z	Opal 1	800mm 2	24VDC	0
		1.500mm 5	2.700K (66 lm/w) - 22W/m 2		☐ White (9003) 1
			3.000K (72 lm/w) - 22W/m 3		☐ Black (9005) 2
			4.000K (78 lm/w) - 22W/m 4		☒ ☐ Matt Gold 4
			CCT (70 lm/w) - 22W/m 9		☒ ☐ Silver 5
					☒ ☐ Custom RAL C
					☒ ☐ Electrolytic Plating




900 - 1,500mm

Code: **Z 1** ☐ ☐ ☐ **0** ☐

Zero 90°

Code	Diffuser	Size	CCT (lm/W) - Power/m	Voltage	Colour
Code	Z	Opal 1	Extern (1,500mm) 3	24VDC	0
		Intern (1,500mm) 6	2.700K (66 lm/w) - 22W/m 2		☐ White (9003) 1
			3.000K (72 lm/w) - 22W/m 3		☐ Black (9005) 2
			4.000K (78 lm/w) - 22W/m 4		☒ ☐ Matt Gold 4
			CCT (70 lm/w) - 22W/m 9		☒ ☐ Silver 5
					☒ ☐ Custom RAL C
					☒ ☐ Electrolytic Plating

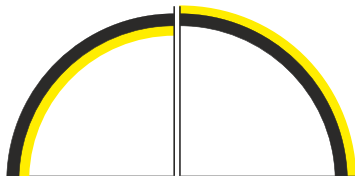

1,500mm

Code: **Z 1** ☐ ☐ ☐ **0** ☐

Control accessories pages 282-289.

☒ Consult delivery terms and conditions.

*Create your luminaire according to your preferences.





Zero 180°

Code

Code

Z

Diffuser

Opal

1

Size

800mm

8

Size

1,500mm

9

CCT (lm/W) - Power/m

2,700K (66 lm/w) - 22W/m

2

CCT (lm/W) - Power/m

3,000K (72 lm/w) - 22W/m

3

CCT (lm/W) - Power/m

4,000K (78 lm/w) - 22W/m

4

CCT (lm/W) - Power/m

CCT (70 lm/w) - 22W/m

9

Voltage

24VDC

0

Colour

☐

White (9003)

1

☒

Black (9005)

2

☒

Matt Gold

4

☒

Silver

5

☒

Custom RAL

C

☒

Electrolytic Plating


900 - 1,500mm

Code:

Z

1

0



900 - 1,500mm

Code: **Z** **1** **0**

Zero line


Code	Diffuser	Size	CCT (lm/W) - Power/m		Voltage	Colour	
Code	Z	Opal	1	2,500mm 0	2,700K (66 lm/w) - 22W/m 2	24VDC 0	White (9003) 1
					3,000K (72 lm/w) - 22W/m 3		Black (9005) 2
					4,000K (78 lm/w) - 22W/m 4		Matt Gold 4
					CCT (70 lm/w) - 22W/m 9		Silver 5
							Custom RAL C
							Electrolytic Plating

2,500mm

Code: Z 1 0



2,500mm

Code: **Z** **1** **0** ☒ On demand.

*Create your code according to your preferences. CCT 2,700-5,500K only works with driver Casambi and Tuya.. Accessories on page 158-159.

Accessories



End Cap
☐ 40631
☒ 40632
☒ 40634
☐ 40635




Suspension Kit
 Metallic (m)
☐ 34720
☐ 34721
☒ 34722



Ceiling
 suspension
☐ 40430



Kit Joint
 Metallic
☐ 40490
☐ 40491
☒ 40492




Control accessories pages 282-289.


☒ Consult delivery terms and conditions.


*Create your luminaire according to your preferences.

5 YEARS WARRANTY | 50,000 HOURS | IP 20 | CRI ≥80 | 160 LED/m | | 24 VDC |




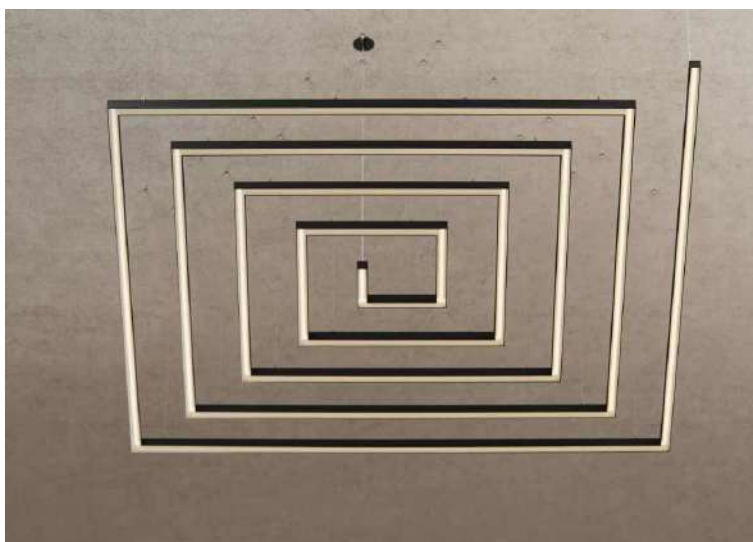


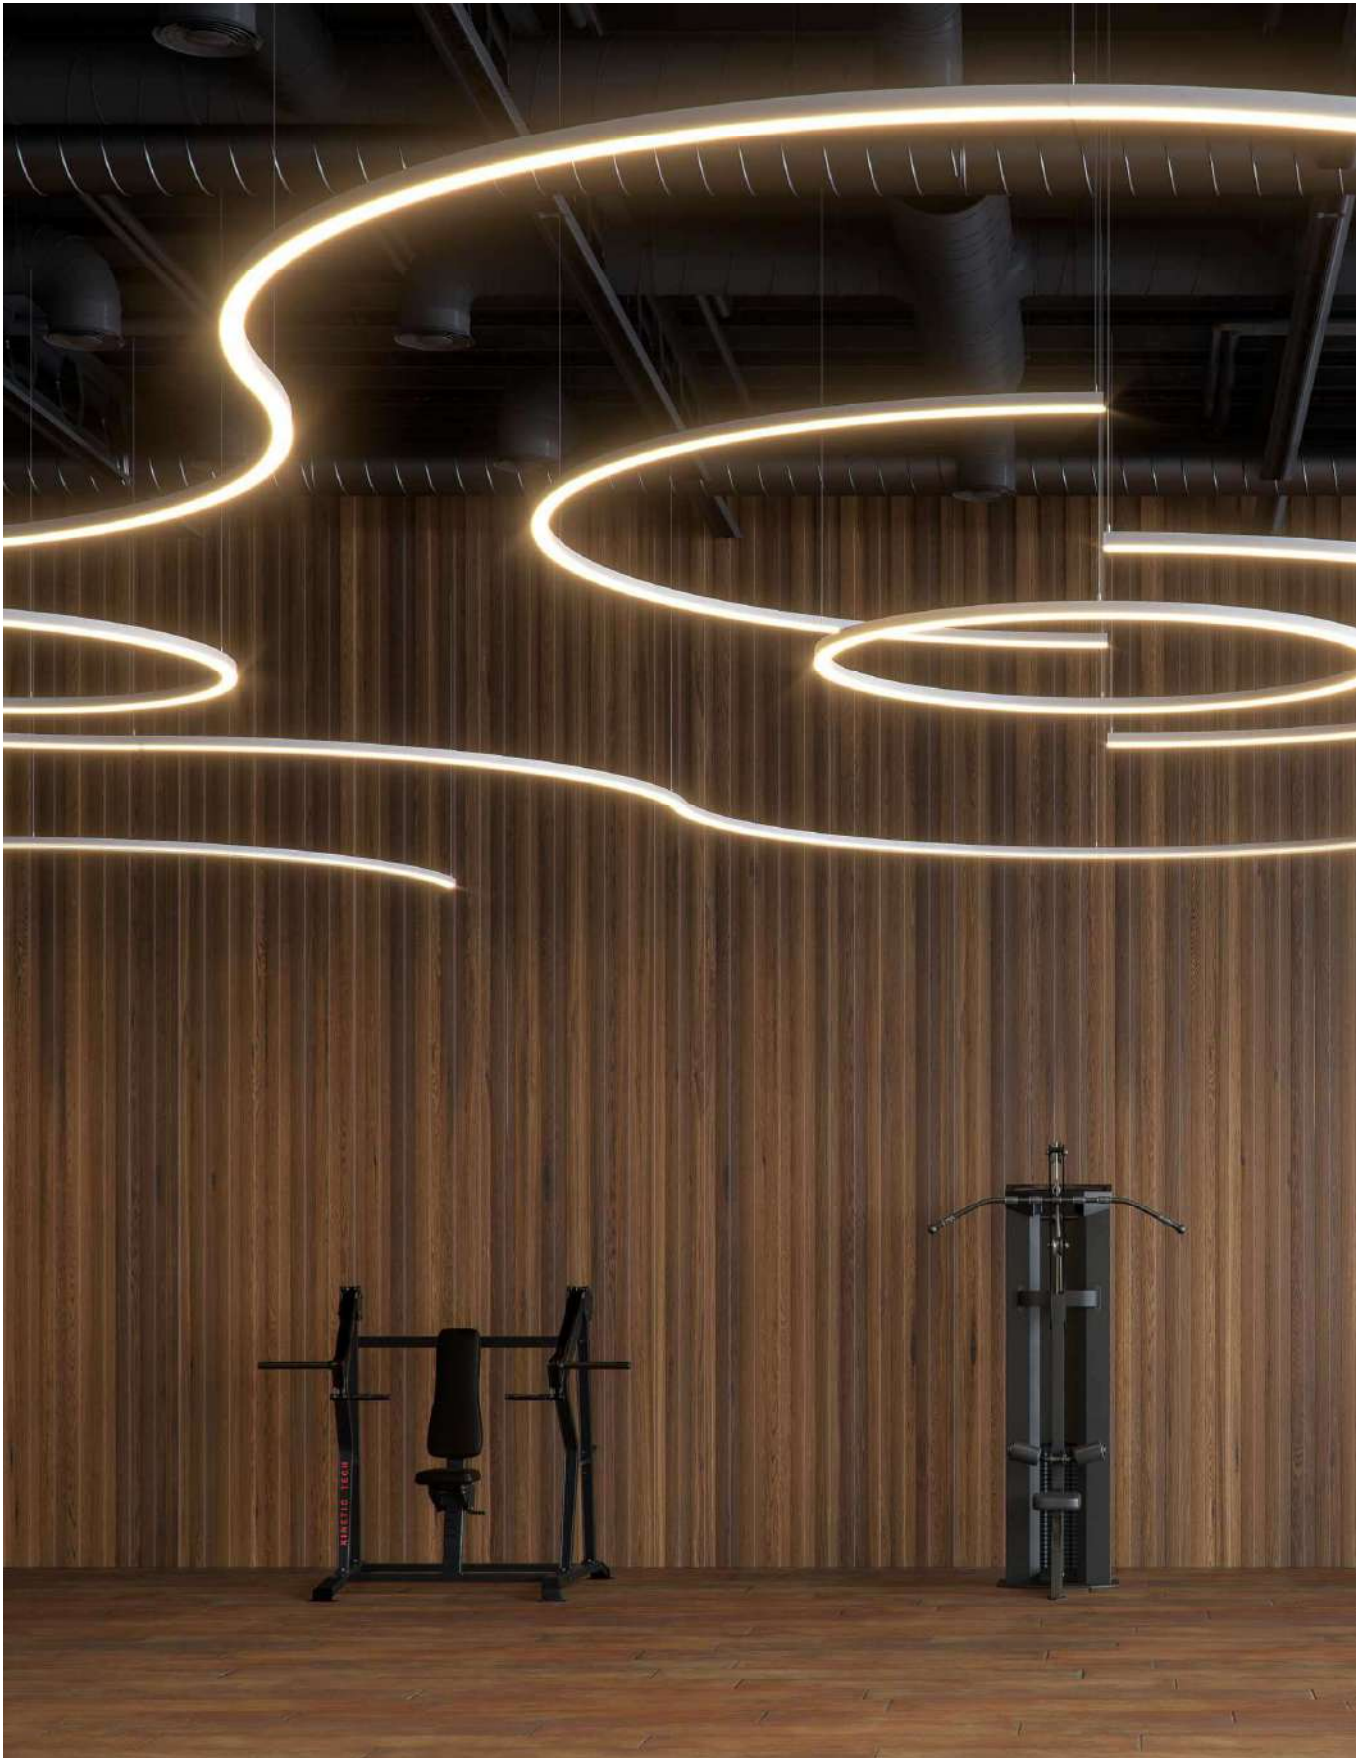

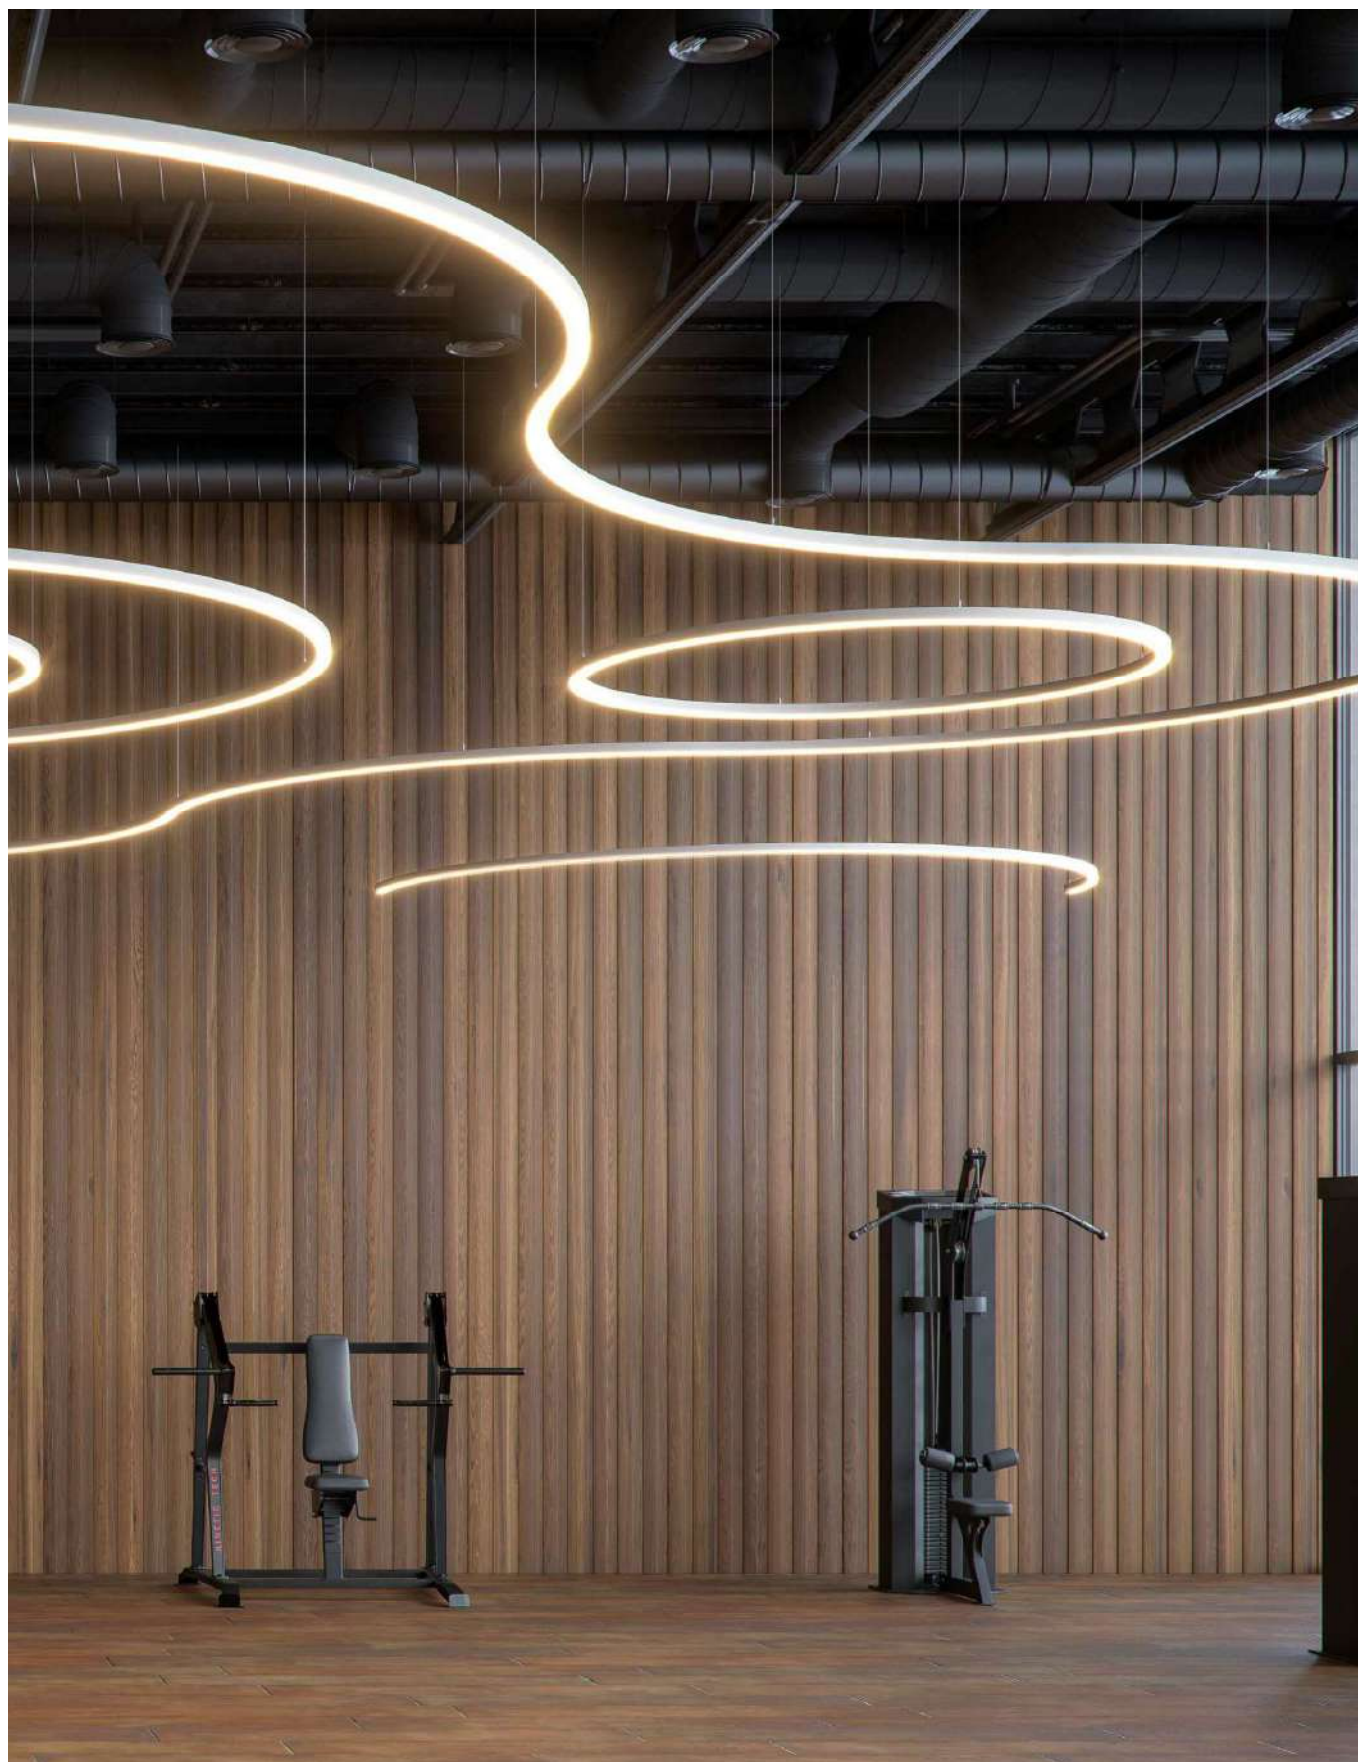



Zero dual

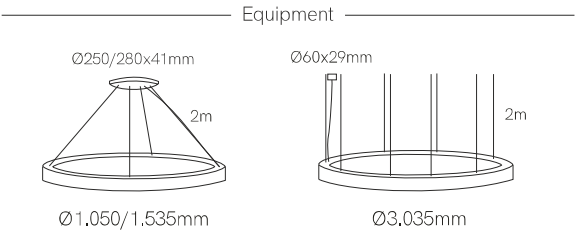

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power cable.



Technical Information

Power	107W / 162W / 325W
Lumens	5,457 lm - 17,225 lm
Installation	Pendant
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 1	Opal 8	1.050mm 3	3.000K (55 lm/W) - 20W/m 3	On / Off 1	White (9003) 1
		1.550mm 8	4.000K (58 lm/W) - 20W/m 4	Dali 2	Black (9005) 2
		3.050mm 9		Push 3	Custom RAL C
				Casambi 5	
				Tuya 7	

Code: 1 8



Consult delivery terms and conditions.


*Create your code according to your preferences.



Kaa




Kaa line

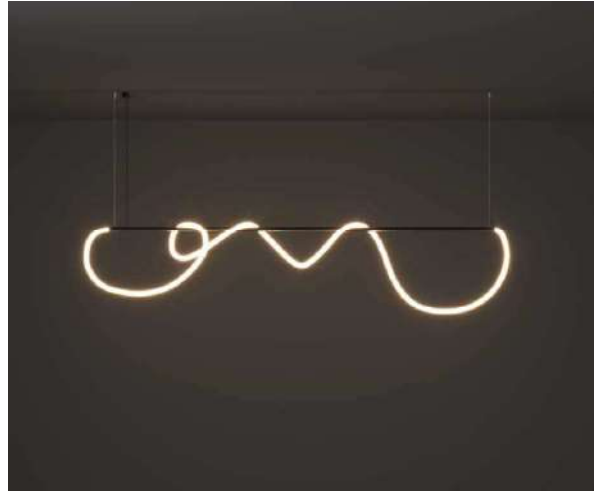

New

Kaa



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit, power cable and end caps.



Technical Information

Power	90W / 180W / 300W
Lumens	5,400 lm - 21,900 lm
Installation	Pendant
Material	Aluminium and silicone

Code	Size (Led)	CCT (lm/W) - Power/m		Driver	Colour				
Code	76	3 x 1,500mm	1	2,400K (60 lm/W) - 20W/m	2	On / Off	1	 White (9003)	1
		3 x 3,000mm	3	2,700K (65 lm/W) - 20W/m	3	Dali	2	 Black (9005)	2
		3 x 5,000mm	5	3,000K (69 lm/W) - 20W/m	4	Push	3	 Custom RAL	C
				4,000K (73 lm/W) - 20W/m	5	Casambi	5		
				RGB (41 lm/W) - 20W/m	8	Tuya	7		
				2,700-5,500K (70 lm/W) - 20W/m	9				

Code: **7** **6**


Included accessories

Suspension kit		1 x 3	+	Clip	1 x 3
		3 x 6			3 x 6
		5 x 9			5 x 9



Consult delivery terms and conditions.



*Create your code according to your preferences, RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.





New

Kaa line

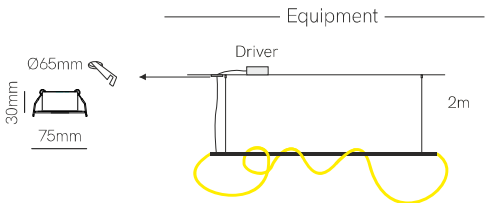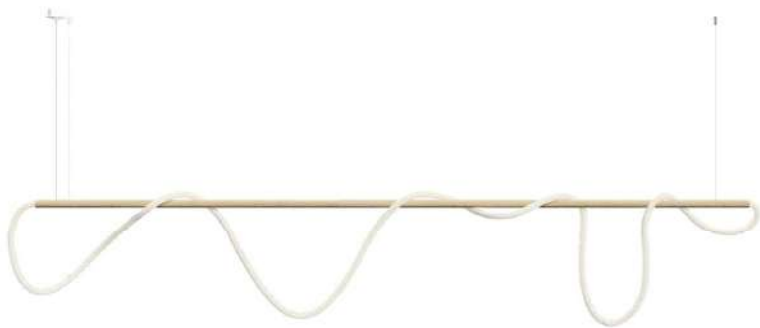

Control accessories pages 282-289.

*Finished luminaire. Includes power supply, suspension kit and power.



Technical Information

Power	30W / 60W / 100W
Lumens	1.800 lm - 7.300 lm
Installation	Pendant
Material	Aluminium and silicone

Code	Size (Stick + Led)	CCT (lm/W) - Power/m	Driver	Colour (stick)
Code 74	1,000 + 1,500mm 1	2,400K (60 lm/W) - 20W/m 2	On / Off 1	☐ White (9003) 1
	1,600 + 3,000mm 3	2,700K (65 lm/W) - 20W/m 3	Dali 2	☒ Black (9005) 2
	2,500 + 5,000mm 5	3,000K (69 lm/W) - 20W/m 4	Push 3	☒ Matt Gold 3
		4,000K (73 lm/W) - 20W/m 5	Casambi 5	☒ Custom RAL C
		RGB (41 lm/W) - 20W/m 8	Tuya 7	☒ Electrolytic Plating
		2,700-5,500K (70 lm/W) - 20W/m 9		

Code: **7** **4** ☐ ☐ ☐ ☐



Consult delivery terms and conditions.




*Create your code according to your preferences, RGB-W and CCT 2,700-5,500K only works with driver 5 Casambi and 7 Tuya.






New

Horizon

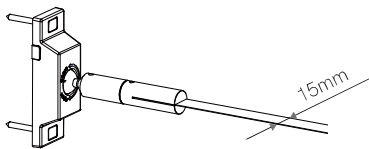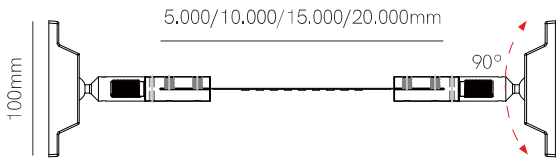

Compatible
led strips p. 294.



Technical Information

Max. power	48W - 288W
Lumens	4,560 lm - 28,800 lm
Installation	Pendant
Material	Aluminium
Material	Flex

Code	Led	Size (Led)	CCT (lm/W) - Power/m	Driver	Colour
Code 2	9,6W/m (Fine 51)	5,000mm 1	2,700K (95 lm/W) 2	On / Off 1	White (9003) 1
	14,4W/m (Fine 41)	10,000mm 2	3,000K (98 lm/W) 3		Black (9005) 2
		15,000mm 3	4,000K (100 lm/W) 4		Custom RAL C
		20,000mm 4			

Code: 2 1




*Led strip and power supply included.





Flash



*Finished luminaire. Includes spring clips and end caps.

Technical Information

Power	16W / 27W / 35W / 46W / 55W
Lumens	1.600 lm - 6.050 lm
Installation	Wall
Material	Aluminium
PCB	Flex

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 3	Opal 9	520mm 1	2.700K (100 lm/W) - 30W/m 2	On / Off 1	☐ White (9003) 1
		895mm 2	3.000K (105 lm/W) - 30W/m 3		☒ Black (9005) 2
		1.145mm 3	4.000K (110 lm/W) - 30W/m 4		☐ Aluminium 9
		1.520mm 5	6.000K (110 lm/W) - 30W/m 6		☒ Custom RAL C
		1.825mm 6			

Code: 3 9 1




Consult delivery terms and conditions.

*Create your code according to your preferences.





Triton



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, clip rotatable, 2mts power cable and end caps.



Technical Information

Power	21W / 41W / 61W
Lumens	2,625 lm - 8,235 lm
Installation	Surface
Material	Aluminium
PCB	Rigid


Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 4	Asymmetric (15°/35°) 9	420mm 1	2,700K (125 lm/W) - 50W/m 2	On / Off 1	Black (9005) 2
		820mm 2	3,000K (130 lm/W) - 50W/m 3	Dali 2	Custom RAL C
		1,220mm 3	4,000K (135 lm/W) - 50W/m 4		


Code: 4 9 2



Consult delivery terms and conditions.

*Create your code according to your preferences.




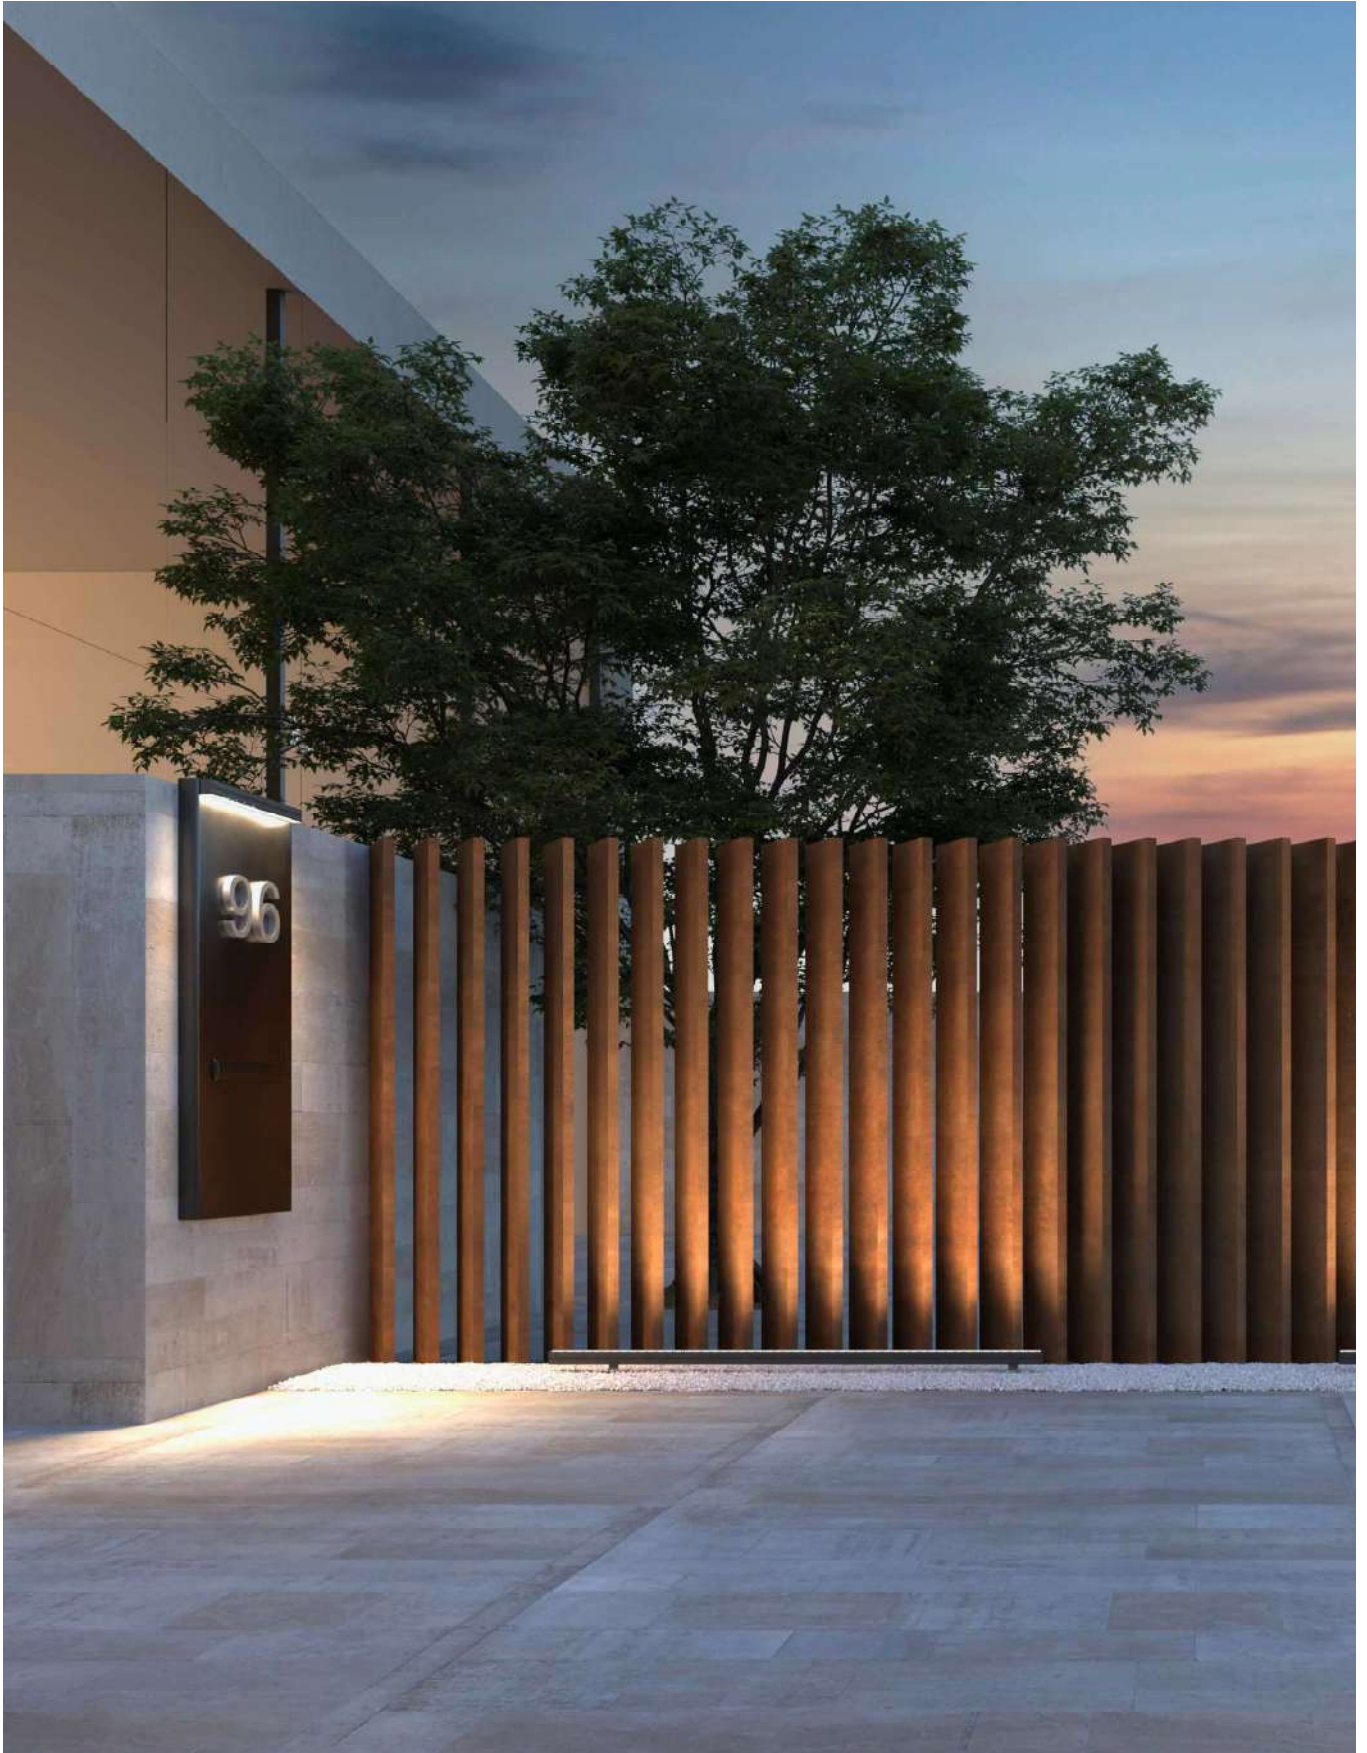





Triton down



Control accessories pages 282-289.

*Finished luminaire. Includes power supply, 2mts power cable and end caps.



Technical Information

Power	46W / 57W / 69W / 80W / 103W
Lumens	5,152 lm - 14,008 lm
Installation	Surface / Pendant
Material	Aluminium
PCB	Rigid

Code	Diffuser	Size	CCT (lm/W) - Power/m	Driver	Colour
Code 4	Opal 6	1.130mm 3	2,700K (112 lm/W) - 40W/m 2	On / Off 1	White (9003) 1
		1.410mm 4	3,000K (128 lm/W) - 40W/m 3	Dali 2	Black (9005) 2
		1.690mm 5	4,000K (136 lm/W) - 40W/m 4		Custom RAL C
		1.970mm 6	5,500K (136 lm/W) - 40W/m 5		
		2.530mm 7			

Code: 4 6

ⓘ Consult delivery terms and conditions.

*Create your code according to your preferences.

Accessories

		
Wall bracket	Ceiling suspension	Suspension Kit
☐ 40531	☐ 40510	☐ 40520 (2m)
☒ 40532		



Blaber acoustic panels for luminaires



In a world where the quality of sound and lighting is critical, the new range of Blaber panels, together with our luminaires, offer a comprehensive solution to meet acoustic and lighting comfort standards.

It has been proven that a healthy listening environment increases productivity and improves communication, which is why more and more professionals in the sector are focusing on multi-purpose solutions that combine attractive design with functionality.

Our panels, made from recycled PET material not only beautify spaces, but also contribute to more comfortable and relaxed environments by absorbing sound, avoiding reverberation, and providing adequate lighting.

The Blabler range is available in a variety of shapes, colors and with the possibility of customization.

En un mundo donde la calidad del sonido y la iluminación es fundamental, la nueva gama de paneles Blaber, junto con nuestras luminarias, ofrecen una solución integral para cumplir con los estándares de confort acústico y luminoso.

Está demostrado que un entorno auditivo saludable aumenta la productividad y mejora la comunicación, por esta razón cada vez son más los profesionales del sector que ponen especial interés en soluciones polivalentes que combinen un diseño atractivo con la funcionalidad.

Nuestros paneles hechos con material reciclado PET, no solo embellecen los espacios, sino que también contribuyen a crear entornos más cómodos y relajados, absorbiendo el sonido, evitando la reverberación y proporcionando una iluminación adecuada.

La gama Blabler está disponible en variedad de formas, colores y con la posibilidad de personalización.








New

Blaber line



Control accessories pages 282-289.

*Finished luminaire. Includes suspension kit, power cable and end caps.

Technical Information

Power	30W / 39W / 49W
Lumens	2.730 lm - 5.047 lm
Installation	Pendant
Material	Aluminium and PET felt
PCB	Rigid


Code	Diffuser (Angle)	Size	CCT (lm/W) - Power/m	Driver	Colour
Code B	Black Slats (60°) 9	945mm 2	2,700K (91 lm/W) - 34W/m 2	On / Off 1	 Blue 5
		1,225mm 3	3,000K (96 lm/W) - 34W/m 3	Dali 2	 Black 6
		1,505mm 4	4,000K (103 lm/W) - 34W/m 4	Push 3	 Gray 8
				Casambi 5	 Orange 9
					 Custom C

Code: **B** **9**



*Create your code according to your preferences.

 Consult delivery terms and conditions.

Standard colors





Custom colors






New


Blaber square

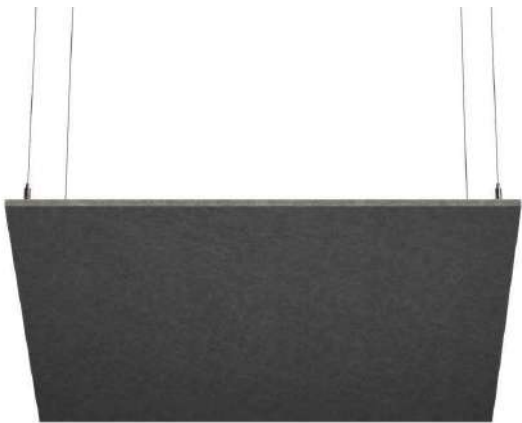

600x600mm



600x1,050mm



Code	Size	Presentation	Installation	Colour
Code BC	600x600mm	3 Sound Absorbing	Pendant wire 2	5 Blue
	600x1,050mm	4 Custom		6 Black
				8 Gray
				9 Orange
				C Custom

Code: BC 2


*Create your code according to your preferences.

Consult delivery terms and conditions.
Consult with project department to combine sound absorbing with luminaires.


Standard colors



Custom colors




RoHS

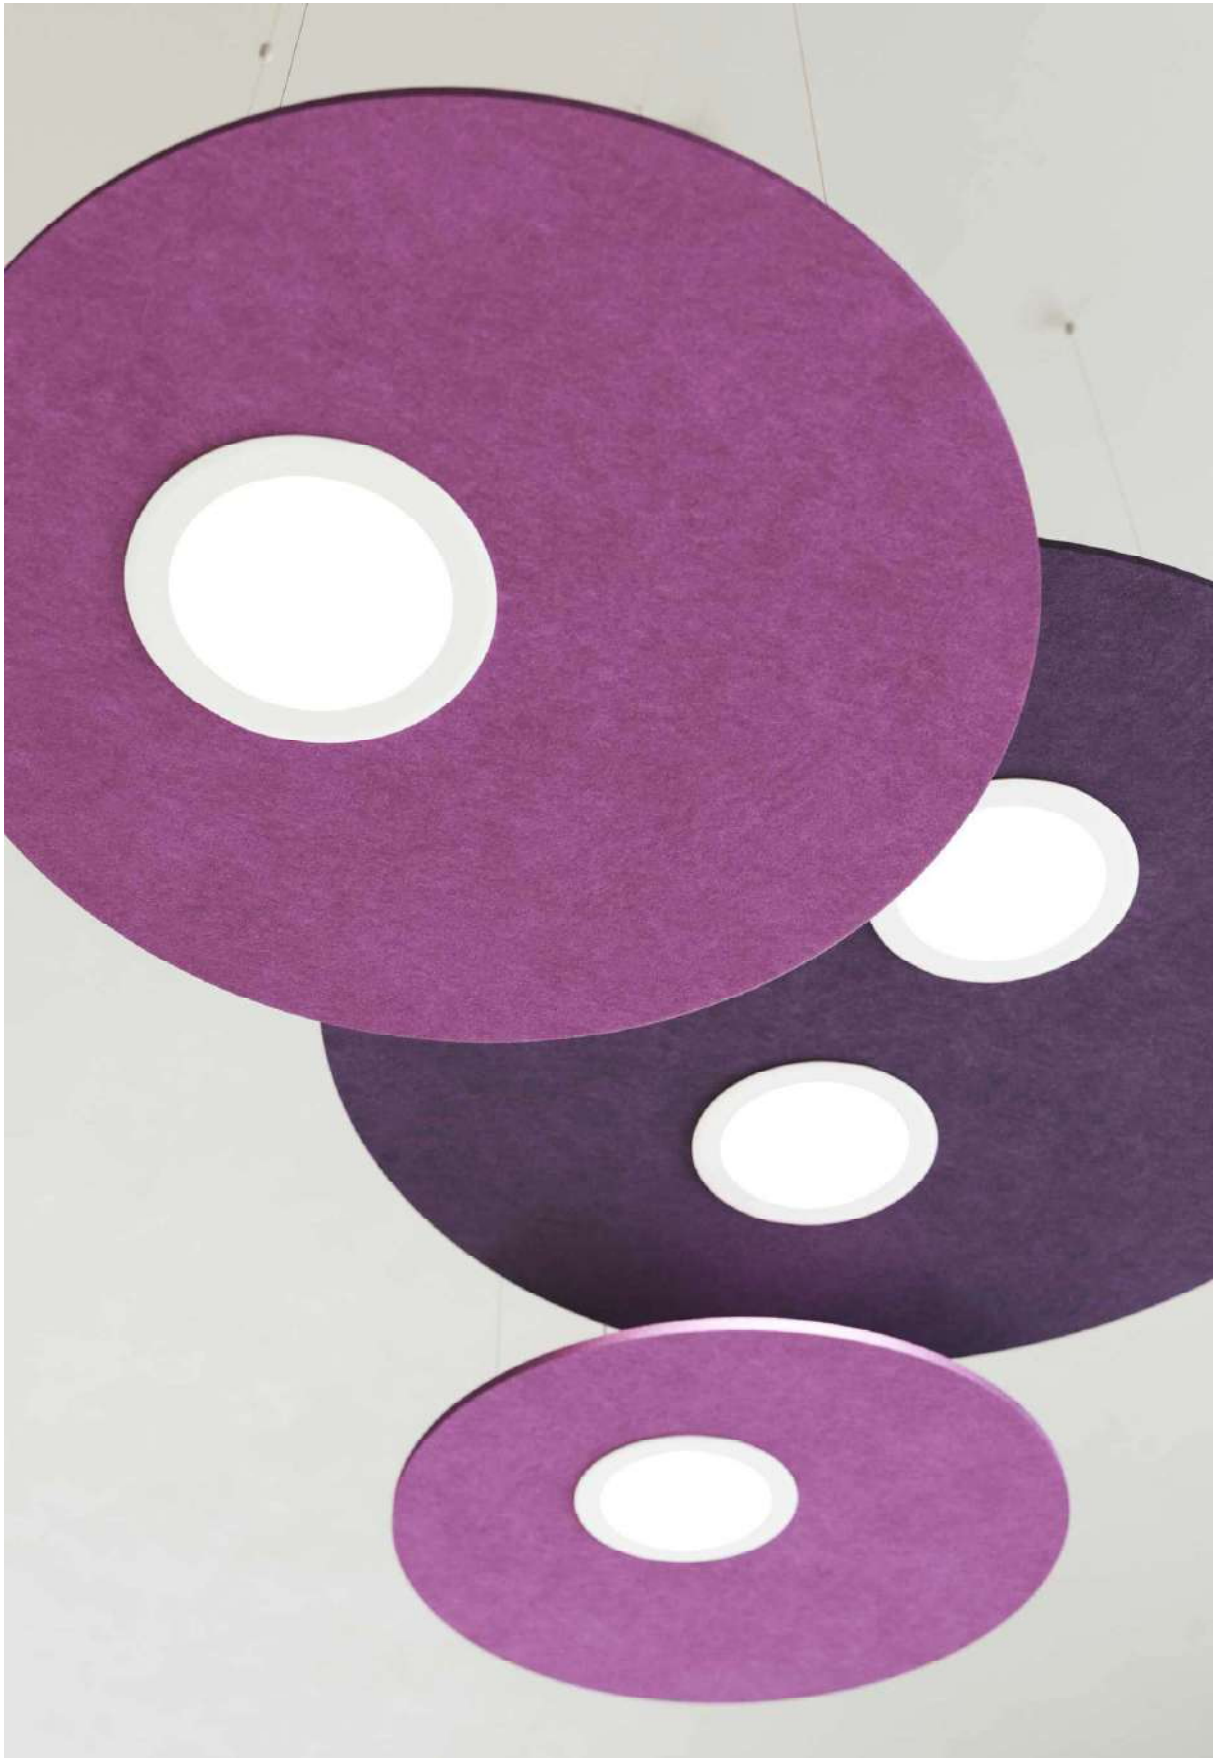


New

Blaber round



Ø400/700/900/1.000mm



Code	Size		Presentation		Installation		Colour	
Code BR	400mm	5	Sound Absorbing	3	Pendant wire	2	Blue	5
	700mm	6	Custom	9			Black	6
	900mm	7					Gray	8
	1.000mm	8					Orange	9
							Custom	C

Code: **BR** **2**


*Create your code according to your preferences.

- Consult delivery terms and conditions.
- Consult with project department to combine sound absorbing with luminaires.

Standard colors



Custom colors





RoHS




New

Blaber triangular

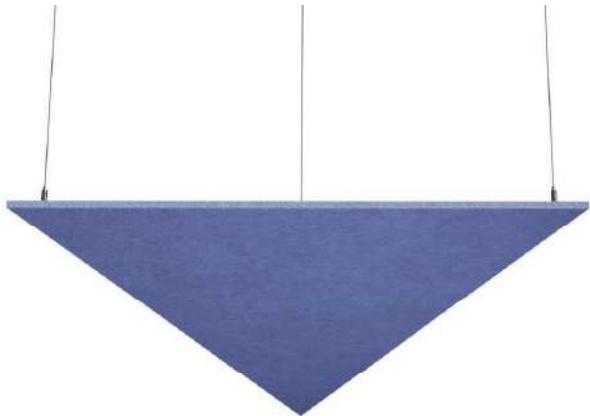

600x600x600mm / 840x840x840mm



Code		Size	Presentation		Installation	Colour		
Code	BT	600x600x600mm	1	Sound Absorbing	3	Pendant wire	2	① Blue 5
		840x840x840mm	2	② Custom 9				① Black 6
								① Gray 8
								① Orange 9
								① Custom C

Code: BT 2


*Create your code according to your preferences.

① Consult delivery terms and conditions.
② Consult with project department to combine sound absorbing with luminaires.

Standard colors



Custom colors



RoHS

5 YEARS WARRANTY | | | | 100% PET |

Luminaires accessories

Time



Urban



Time / Urban



Zero Design



Base Ø330x41mm

☐ Z12411	☒ Z12412	240W/24VDC ON/OFF
☐ Z12421	☒ Z12422	200W/24VDC DALI
☐ Z12431	☒ Z12432	240W/24VDC PUSH
☐ Z12451	☒ Z12452	240W/24VDC CASAMBI
☐ Z12471	☒ Z12472	240W/24VDC TUYA



Base Ø280x41mm

☐ Z11511	☒ Z11512	150W/24VDC ON/OFF
☐ Z11521	☒ Z11522	120W/24VDC DALI
☐ Z11531	☒ Z11532	150W/24VDC PUSH
☐ Z11551	☒ Z11552	150W/24VDC CASAMBI
☐ Z11571	☒ Z11572	150W/24VDC TUYA



Base Ø250x41mm

☐ Z11011	☒ Z11012	75W/24VDC ON/OFF
☐ Z11021	☒ Z11022	75W/24VDC DALI
☐ Z11031	☒ Z11032	75W/24VDC PUSH
☐ Z11051	☒ Z11052	75W/24VDC CASAMBI
☐ Z11071	☒ Z11072	75W/24VDC TUYA

Power supplies linear box



Base 455x47x28mm

☐ 35331	☒ 35332	30W/24VDC
☐ 35361	☒ 35362	60W/24VDC
☐ 35311	☒ 35312	100W/24VDC



Profiles



Model	Page	Section Size	Installation	
BOX 12	192	10x15 mm		Surface
BOX 16	166	17,3x7 mm		Surface
BOX 18	169	17,3x14,5 mm		Surface
BOX 23	172	23x10,8 mm		Surface
BOX 28	197	18x22,2 mm		Surface
NEW BOX 73	193	21x21 mm		Surface
NEW BOX 75	182	16x24,5 mm	 	Surface / Pendant
NEW BOX 99	185	10x12 mm	 	Surface / Pendant
BOX 19	180	25x25 mm	 	Surface / Pendant
BOX 39	196	Ø28 mm	 	Surface / Pendant
BOX 35	176	35x35 mm	 	Surface / Pendant
NEW BOX 95	183	23,25x22 mm		Recessed
BOX 11	195	16x15 mm		Recessed
BOX 15	167	25x7 mm		Recessed
BOX 17	171	25x14,5mm		Recessed
BOX 53	173	30,5x10,8mm		Recessed
BOX 10	181	35x25 mm		Recessed

Max Power	IP	Standard finishes	Standard Size
15W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
40W MAX	20 IP	Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	Black White	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	Black	2m
40W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m
25W MAX	20 IP	White Black Alum.	2m


	Model	Page	Section Size	Installation
	BOX 38	177	50x35 mm	 Recessed
NEW	BOX 68	175	60x13 mm	 Trimless
	BOX 37	179	79x32 mm	 Trimless
	BOX 14	186	16x16 mm	 Surface / Corner
NEW	BOX 24	189	29,5x17,4 mm	 Recessed
NEW	BOX 60	187	20x16 mm	 Surface / Corner
NEW	BOX 71	190	18,4x18,4 mm	 Surface / Corner
	BOX 13	191	17,9x5,7 mm	 Surface / Flex
	BOX 22	200	17,8x48,6 mm	 Surface
	BOX 27	203	17,7x43,5 mm	 Surface
	BOX 33	201	29,4x50 mm	 Surface
NEW	BOX 98	199	78,8x95 mm	 Surface / Railing
	BOX 21	202	26,2x76,2 mm	 Recessed
NEW	BOX 65	205	15x80 mm	 Surface
NEW	BOX 67	207	65x28 mm	 Surface / Stairs
	BOX 29	208	21x26mm	 Recessed
	BOX 30	209	12x2 mm / 20x2mm	 Surface

Max Power	IP	Standard finishes	Standard Size
40W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black	2m
40W MAX	40 IP	White	2m
15W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
22W MAX	20 IP	White Black Alum.	2m
15W MAX	20 IP	Alum.	2m
2x15W MAX	20 IP	Black Alum.	2m
15W MAX	20 IP	White Black Alum.	2m
20W MAX	20 IP	White Black Alum.	2m
2x15W MAX	20 IP	White Black	2m
15W MAX	20 IP	White Alum.	2m
12W MAX	20 IP	White Black Alum.	2m
12W MAX	20 IP	Black	2m
25W MAX	55 IP	Alum.	2m
20W MAX 40W MAX	20 IP	Alum.	2m

Box 16



*Useful area: 12x5mm.



Compatible
led strips p. 294.

Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium

Code	☐ 16121
	☒ 16122
	☐ 16119
	 Custom RAL
	 Electrolytic Plating

 Consult delivery terms and conditions.

Accessories



Diffuser PC
Transp. 90%
☐ 20450



Diffuser PC
Opal 70%
☐ 20440



Diffuser PC
Black 50%
☒ 20472



Diffuser
Silicone
Opal 60%
☐ 20469
☐ 20469-15



End Cap
☐ 16631
☒ 16632
☐ 16633



End Cap
☐ 16621
☒ 16622
☐ 16623



Clip
Metallic
☐ 20330



Clip
Rotable
Metallic
☐ 20350





Clip PC
☐ 20380
☒ 20382




3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063

Box 15



*Useful area: 12x5mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 15121 ☒ 15122 ☐ 15119 Custom RAL Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC Transp. 90%	Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Silicone Opal 60%	End Cap	End Cap
☐ 20450	☐ 20440	☒ 20472	☐ 20469 ☐ 20469-15	☐ 15631 ☒ 15632 ☐ 15633	☐ 15621 ☒ 15622 ☐ 15623



3 YEARS WARRANTY | IP 20 | 2m Max AL 6063




Box 18



*Useful area: 12x10mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 18121 ☒ 18122 ☐ 18119 ☒ Custom RAL ☒ Electrolytic Plating


Consult delivery terms and conditions.

Accessories



Diffuser PC Transp. 90%	Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Silicone	End Cap	End Cap	Diffuser PC Optic 60°	End Cap 60°	End Cap 60°	Clip Metallic	Clip Rotable Metallic	Clip PC
☐ 20450	☐ 20440	☒ 20472	Opal 60%	☐ 18631	☐ 18621	☐ 20430	☐ 18651	☐ 18661	☐ 20330	☐ 20380	☒ 20382
			☐ 20469	☐ 18632	☐ 18622		☒ 18652	☒ 18662			
			☐ 20469-15	☐ 18633	☐ 18623		☐ 18653	☐ 18663		☐ 20350	

CE RoHS

3 YEARS WARRANTY | IP 20 | 2m Max AL 6063

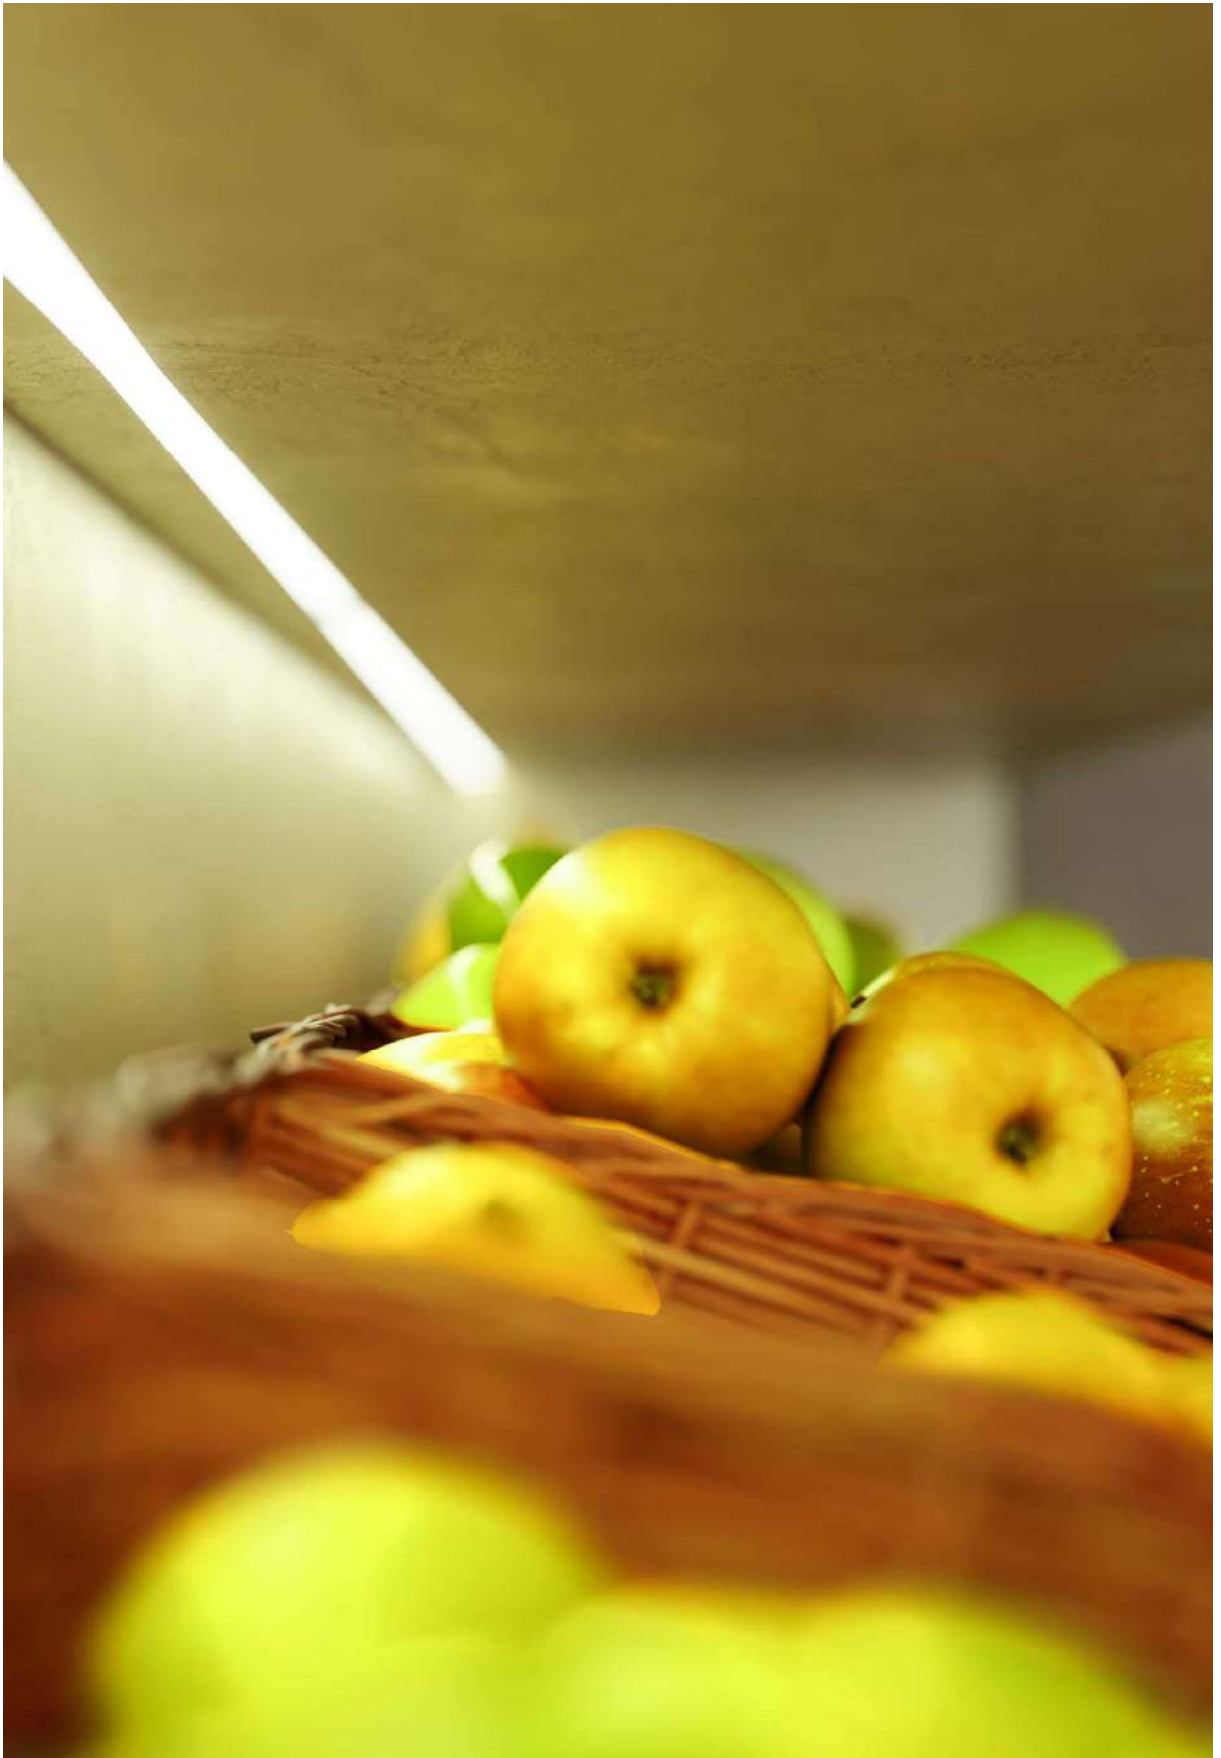


Box 17



*Useful area: 12x10mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 17121
	☒ 17122
	☐ 17119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.



Accessories

Diffuser PC Transp. 90%	Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Silicone Opal 60%	End Cap	End Cap
☐ 20450	☐ 20440	☒ 20472	☐ 20469	☐ 17631	☐ 17621
			☐ 20469-15	☒ 17632	☒ 17622
				☐ 17633	☐ 17623



3 YEARS WARRANTY | IP 20 | 2m Max AL 6063

Box 23



*Useful area: 20x6mm.



Compatible
led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 23121
	☒ 23122
	☐ 23119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 23480



End Cap
☐ 23631
☒ 23632
☐ 23633



End Cap
☐ 23621
☒ 23622
☐ 23623





Clip PC
☐ 23380




3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 53



*Useful area: 20x6mm.

Compatible
led strips p. 294.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 53121
	☒ 53122
	☐ 53119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 23480




End Cap
☐ 53631
☒ 53632
☐ 53633



End Cap
☐ 53621
☒ 53622
☐ 53623




3 YEARS WARRANTY | IP 20 | 2m Max AL 6063

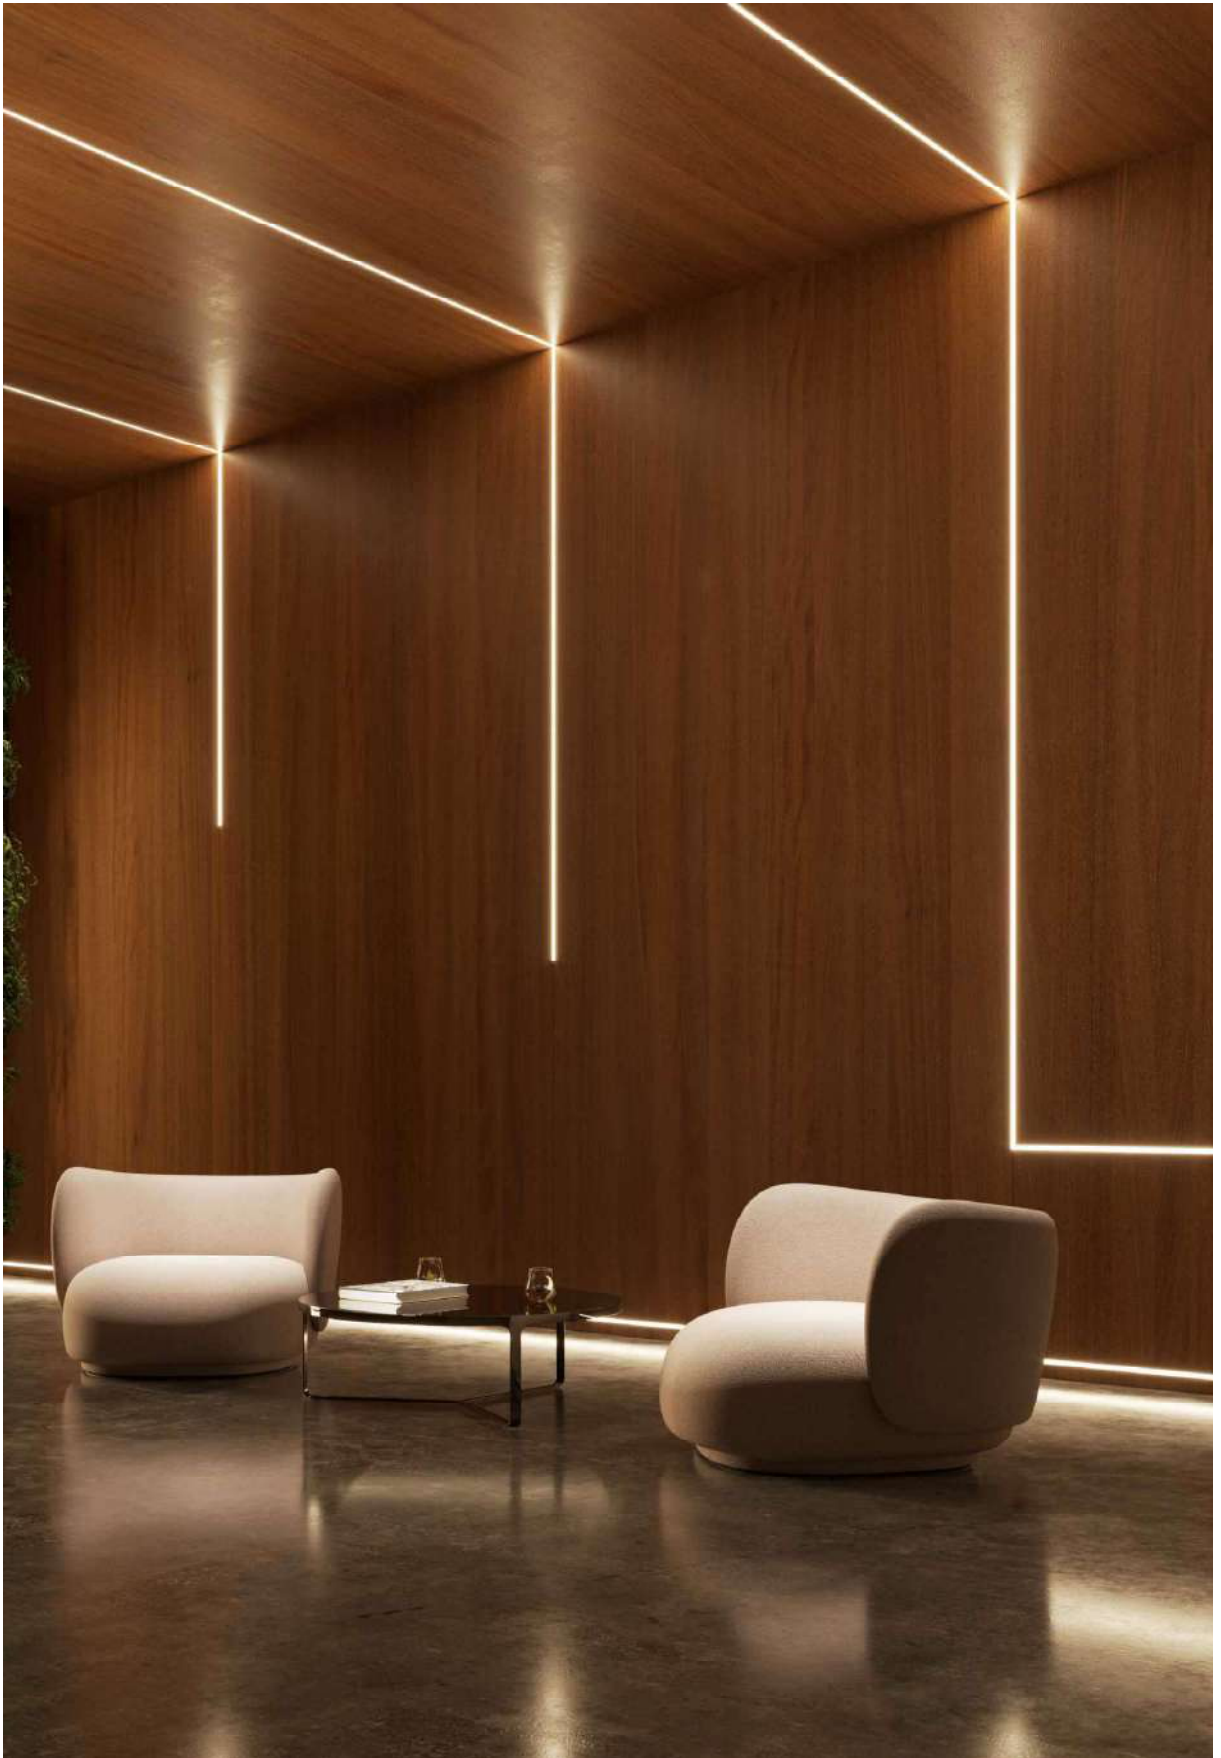


New

Box 68



25mm x L



*Useful area: 12x3mm.

Compatible
led strips p. 294.



+



Technical Information

Max. power	20W/m
Installation	Trimless
Material	Aluminium
Finishes	White / Black
Code	☐ 68121
	☒ 68122


Accessories

Diffuser Continuous	Diffuser Continuous	End Cap	End Cap	Joint 90° Metallic	Joint 90° Metallic	Joint 180° Metallic
☐ 68997	☒ 68502	☐ 68631	☒ 68622	☒ 68450	☒ 68510	☒ 68520




3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 35



*Useful area: 23x20mm.



Compatible
led strips p. 294.

Technical Information

Max. power	40W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 35121 ☒ 35122 ☐ 35119 ☒ Custom RAL ☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70% ☐ 20700	Diffuser PC Black 50% ☒ 20772	End Cap ☐ 35621 ☒ 35622 ☐ 35623	Clip Metallic ☒ 35330	Joint 90° Metallic ☒ 20510	Joint 90° Metallic ☒ 20540	Joint 120° Metallic ☒ 20530	Joint 180° Metallic ☒ 20520	Suspension Kit Metallic ☒ 20720 (2m)	Base 455x47x28mm ☐ 35331 ☒ 35332 (30W/24V) ☐ 35361 ☒ 35362 (60W/24V) ☐ 35311 ☒ 35312 (100W/24V)





3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 38



40mm x L

*Useful area: 23x20mm.

Compatible
led strips p. 294.

Technical Information

Max. power	40W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 38121 ☒ 38122 ☐ 38119 ☒ Custom RAL ☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20700



Diffuser PC
Black 50%
☒ 20772



End Cap
☐ 38621
☒ 38622
☐ 38623



Joint 90°
Metallic
☒ 20510



Joint 90°
Metallic
☒ 20540



Joint 120°
Metallic
☒ 20530



Joint 180°
Metallic
☒ 20520



Spring Clip
Metallic
☒ 20710






3 YEARS WARRANTY | IP 20 | 2m Max AL 6063



Private Residence, Guadalajara (Spain), Design: Carlos Lozano.

Box 37

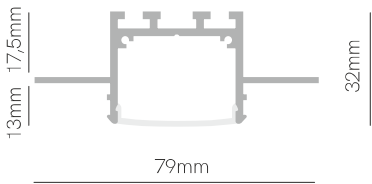

*Useful area: 23x20mm.

Compatible
led strips p. 294.



+



Technical Information

Max. power	40W/m
Installation	Trimless
Material	Aluminium
Finishes	White
Code	☐ 37121
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 37480





End Cap
☐ 37621




3 YEARS WARRANTY | IP 40 | 2m Max AL 6063

Box 19



*Useful area: 12x17,7mm.



Compatible
led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 19121 ☒ 19122 ☐ 19119 ☒ Custom RAL ☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.



Accessories

Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Continuous	End Cap	Clip	Joint 90° Metallic	Joint 90° Metallic	Joint 120° Metallic	Joint 180° Metallic	Suspension Kit	Base 455x47x28mm
☐ 20490	☒ 20502	☐ 20997	☐ 19621 ☒ 19622 ☐ 19623	☒ 19330	☒ 20510	☒ 20540	☒ 20530	☒ 20520	☒ 20720 (2m)	☐ 35331 ☐ 35361 ☐ 35311
										☒ 35332 (30W/24V) ☒ 35362 (60W/24V) ☒ 35312 (100W/24V)




3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 10



*Useful area: 12x17,7mm.

Compatible
led strips p. 294.



Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 10121
	☒ 10122
	☐ 10119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70%	Diffuser PC Black 50%	Diffuser Continuous	End Cap	Joint 90° Metallic	Joint 90° Metallic	Joint 120° Metallic	Joint 180° Metallic	Spring Clip Metallic
☐ 20490	☒ 20502	☐ 20997	☐ 10621 ☒ 10622 ☐ 10623	☐ 20510	☐ 20540	☐ 20530	☐ 20520	☐ 20710



3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

New

Box 75



*Useful area: 12x3mm.



Compatible led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 75121 ☒ 75122 ☐ 75119 ☒ Custom RAL ☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories



Opal
Prismatic
☐ 75440



End Cap
☐ 75621
☒ 75622
☐ 75623



Hanging bracket
Metallic
☐ 75330






Suspension Kit
Metallic
☒ 75720 (2m)



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


New

Box 95



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	22W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 95121
	☒ 95122
	☐ 95119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Opal
Prismatic
☐ 75440



End Cap
☐ 95631
☒ 95632
☐ 95633



End Cap
☐ 95621
☒ 95622
☐ 95623



Clip
Metallic
☐ 24710



3 YEARS WARRANTY | IP 20 | 2m Max AL 6063




New

Box 99



*Useful area: 8x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	White / Black
Code	☐ 99121 ☒ 99122 Custom RAL Electrolytic Plating

Consult delivery terms and conditions.



Accessories

Diffuser PC Opal 70%	End Cap	Suspension Kit Metallic	Joint 90° Metallic	Joint 90° Metallic	Joint 180° Metallic
☐ 99440	☐ 99621 ☒ 99622	☐ 99721 (2m) ☒ 99722 (2m)	☐ 99510 ☒ 99512	☐ 99540 ☒ 99542	☐ 99520 ☒ 99522



3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 14



*Useful area: 10x5mm.



Compatible
led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 14121 New
	☒ 14122 New
	☐ 14119
	☒ Custom RAL
	☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 14480



End Cap
☐ 14631
☒ 14632
☐ 14633



End Cap
☐ 14621
☒ 14622
☐ 14623







Clip
Metallic
☐ 14330



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063


New

Box 60



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 60121
	☒ 60122
	☐ 60119
	 Custom RAL
	 Electrolytic Plating

 Consult delivery terms and conditions.

Accessories

			
Diffuser PC Opal 70%	End Cap	End Cap	Clip Metallic
☐ 60440	☐ 60631	☐ 60621	☐ 60330
	☒ 60632	☒ 60622	
	☐ 60633	☐ 60623	






3 YEARS WARRANTY | IP 20 |  30°-60° | 2m Max  AL 6063




New

Box 24



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 24121
	☒ 24122
	☐ 24119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories


Diffuser PC Opal 70%	End Cap	End Cap	Spring Clip Metallic
☐ 24440	☐ 24631	☐ 24621	☐ 24710
	☒ 24632	☒ 24622	
	☐ 24633	☐ 24623	



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

New

Box 71



*Useful area: 14x5mm.



Compatible
led strips p. 294.

Technical Information

Max. power	22W/m
Installation	Surface / corner
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 71121
	☒ 71122
	☐ 71119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 71440



End Cap
☐ 71631
☒ 71632
☐ 71633



End Cap
☐ 71621
☒ 71622
☐ 71623




Clip
Metallic
☒ 71330



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

Box 13



*Useful area: 12x3mm.

Compatible
led strips p. 294,  +  ✓



Technical Information

Max. power	15W/m
Installation	Surface / flex
Material	Aluminium
Finishes	Aluminium
Code	 13113


Accessories

			
Diffuser PC Opal 70%  13480	End Cap  13633	End Cap  13623	Clip Metallic  13330



3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063

Box 12



*Useful area: 5x10mm.



+



Compatible
led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium
Finishes	Aluminium
Code	12119 ①  Custom RAL ①  Electrolytic Plating

① Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
 20480



End Cap
 12633



End Cap
 12623





Clip
Metallic
 20730



3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063


New

Box 73



*Useful area: 12x7mm.

Compatible
led strips p. 294.



Technical Information

Max. power	22W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 73121
	☒ 73122
	☐ 73119
	☒ Custom RAL
	☒ Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 73440




End Cap
☐ 73621
☒ 73622
☐ 73623




End Cap
☐ 73631
☒ 73632
☐ 73633



3 YEARS WARRANTY | IP 20 | | 2m Max | AL 6063

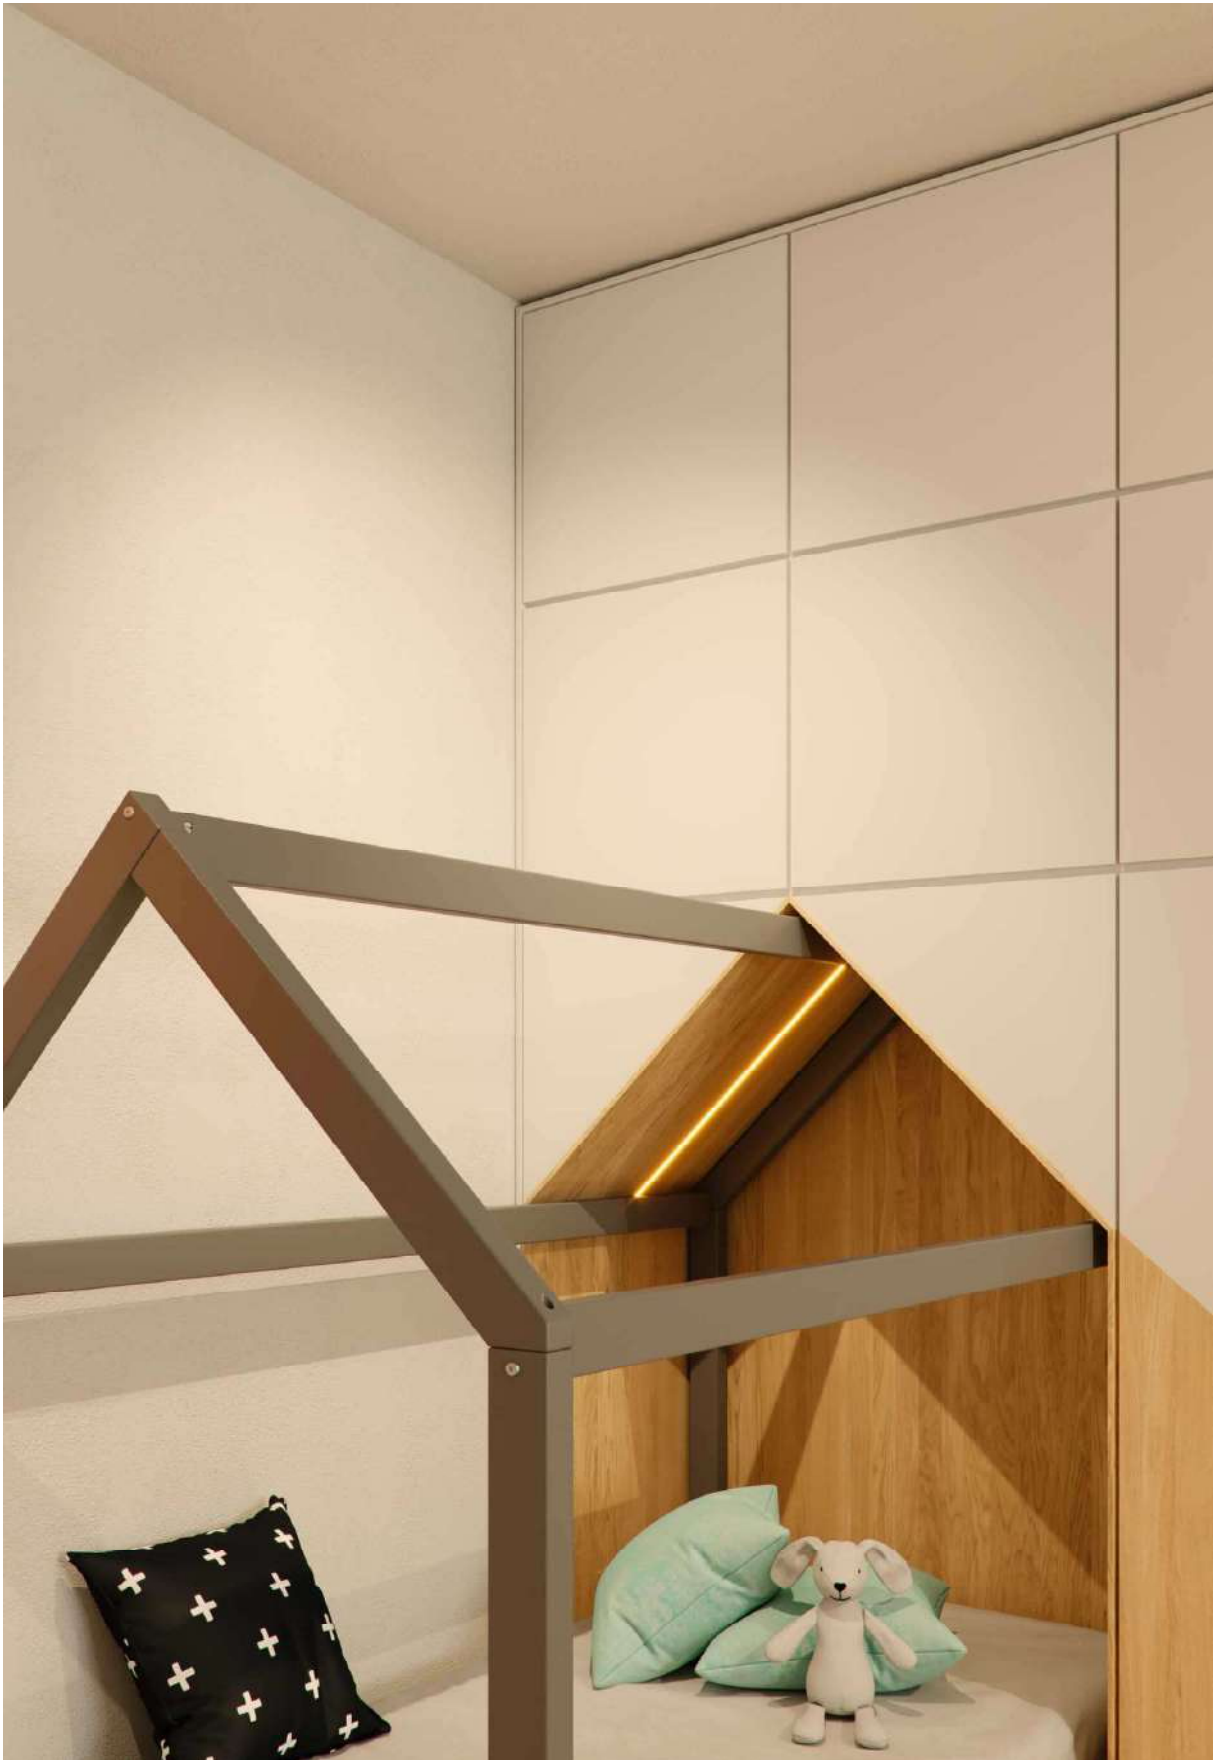

Box 11



*Useful area: 5x10mm.

Compatible
led strips p. 294.  +  ✓



Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium
Finishes	Aluminium
Code	☐ 11119  Custom RAL  Electrolytic Plating

ⓘ Consult delivery terms and conditions.

Accessories


Diffuser PC
Opal 70%
☐ 20480


End Cap
☐ 11633


End Cap
☐ 11623



3 YEARS
WARRANTY


| IP
20

| 


| 2m
Max 

| AL
6063


Box 39



Opal



Angle 30°/ Transparent




90°



30°

*Useful area: 12x8mm.

Compatible
led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Surface / Pendant
Material	Aluminium
Finishes	Black
Code	■ 39122 ① Custom RAL ① Electrolytic Plating

① Consult delivery terms and conditions.

Accessories

Diffuser PC
Opal 70%
■ 39440Diffuser PC
Transp. 90%
■ 39450Diffuser PC
Optic 30%
■ 39430End Cap
■ 39622Clip
Plastic
■ 25530Suspension Kit
■ 25887 (2m)Base 455x47x28mm

□

35331 (30W/24V)

■

35332 (30W/24V)

□

35361 (60W/24V)

■

35362 (60W/24V)

□

35311 (100W/24V)


■

35312 (100W/24V)



3 YEARS WARRANTY | IP 20 | | | 2m Max | AL 6063

Box 28



*Useful area: 12x5mm.

Compatible
led strips p. 294.  +  



Technical Information

Max. power	40W/m
Installation	Surface
Material	Aluminium
Finishes	Aluminium
Code	 28119   Custom RAL   Electrolytic Plating

 Consult delivery terms and conditions.

Accessories



Diffuser PC
Optic 30%
 28430



End Cap
 28633




End Cap
 28623



Clip
Metallic
 28330





3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

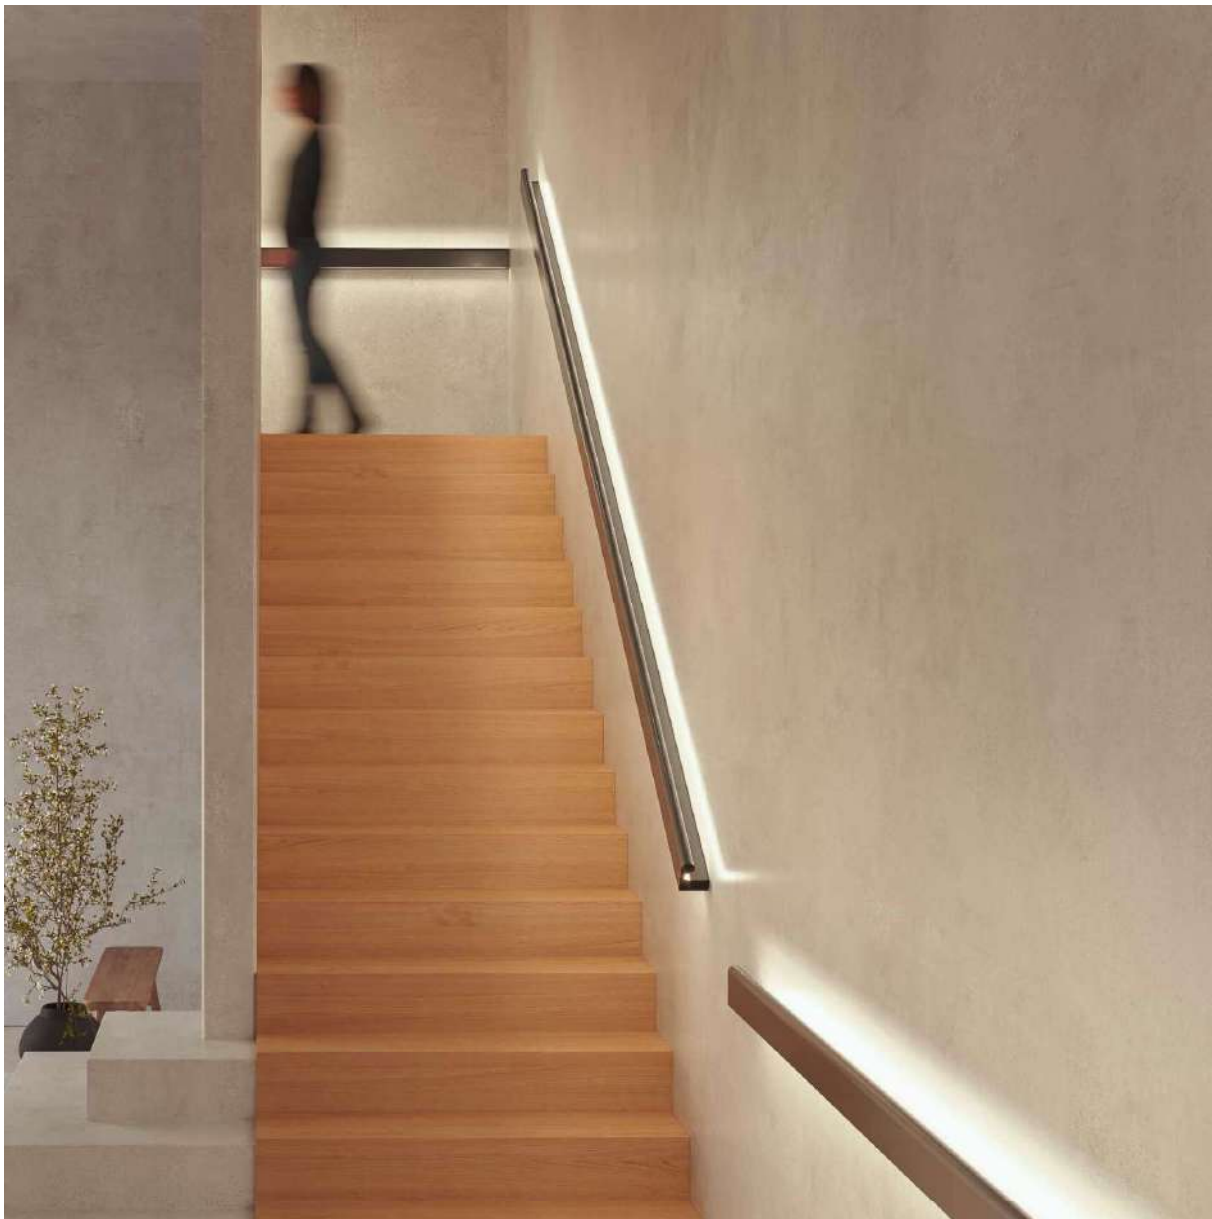

New

Box 98 railing



Compatible
led strips p. 294.  +  ✓



Technical Information

Max. power	2x15W/m
Installation	Surface / railing
Material	Aluminium
Finishes	Black / White
Code	☐ 98121
	☒ 98122
	 Custom RAL

 Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 98440



End Cap
☐ 98621
☒ 98622





3 YEARS
WARRANTY

| IP 20 |

 | 2m
Max

 | AL
6063

Box 22



*Useful area: 12x3mm.



 +   Compatible led strips p. 294.

Technical Information

Max. power	2x15W/m
Installation	Surface
Material	Aluminium
Finishes	Black / Aluminium
Code	22122 22119 Custom RAL Electrolytic Plating

 Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
 20497



Diffuser
Silicone Opal 60%
 20469
 20469-15



End Cap
 22622
 22623





Clip
Metallic
 22330




3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

Box 33

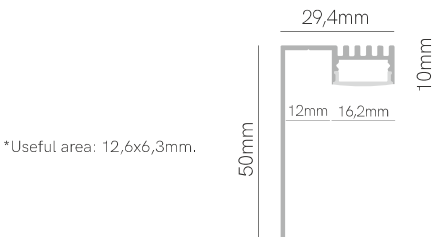

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 33121
	☒ 33122
	☐ 33119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
33440



Diffuser
Silicone
Opal 60%
20469
20469-15





End Cap
33621
33622
33623



3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063

Box 21



*Useful area: 12x3mm.



 +   Compatible led strips p. 294.

Technical Information

Max. power	15W/m
Installation	Recessed
Material	Aluminium
Finishes	White / Aluminium
Code	☐ 21121
	☐ 21119
	 Custom RAL
	 Electrolytic Plating

 Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
☐ 20469
☐ 20469-15



End Cap
☐ 21631
☐ 21633




End Cap
☐ 21621
☐ 21623




3 YEARS WARRANTY | IP 20 |  2m Max  AL 6063

Box 27



*Useful area: 12x3mm.

Compatible
led strips p. 294.



Technical Information

Max. power	15W/m
Installation	Surface
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 27121
	☒ 27122
	☐ 27119
	☒ Custom RAL
	☒ Electrolytic Plating

Consult delivery terms and conditions.

Accessories



Diffuser PC
Opal 70%
☐ 20497



Diffuser
Silicone Opal 60%
☐ 20469
☐ 20469-15




End Cap left
☐ 27631
☒ 27632
☐ 27633



End Cap right
☐ 27621
☒ 27622
☐ 27623



3 YEARS WARRANTY | IP 20 | 2m Max AL 6063

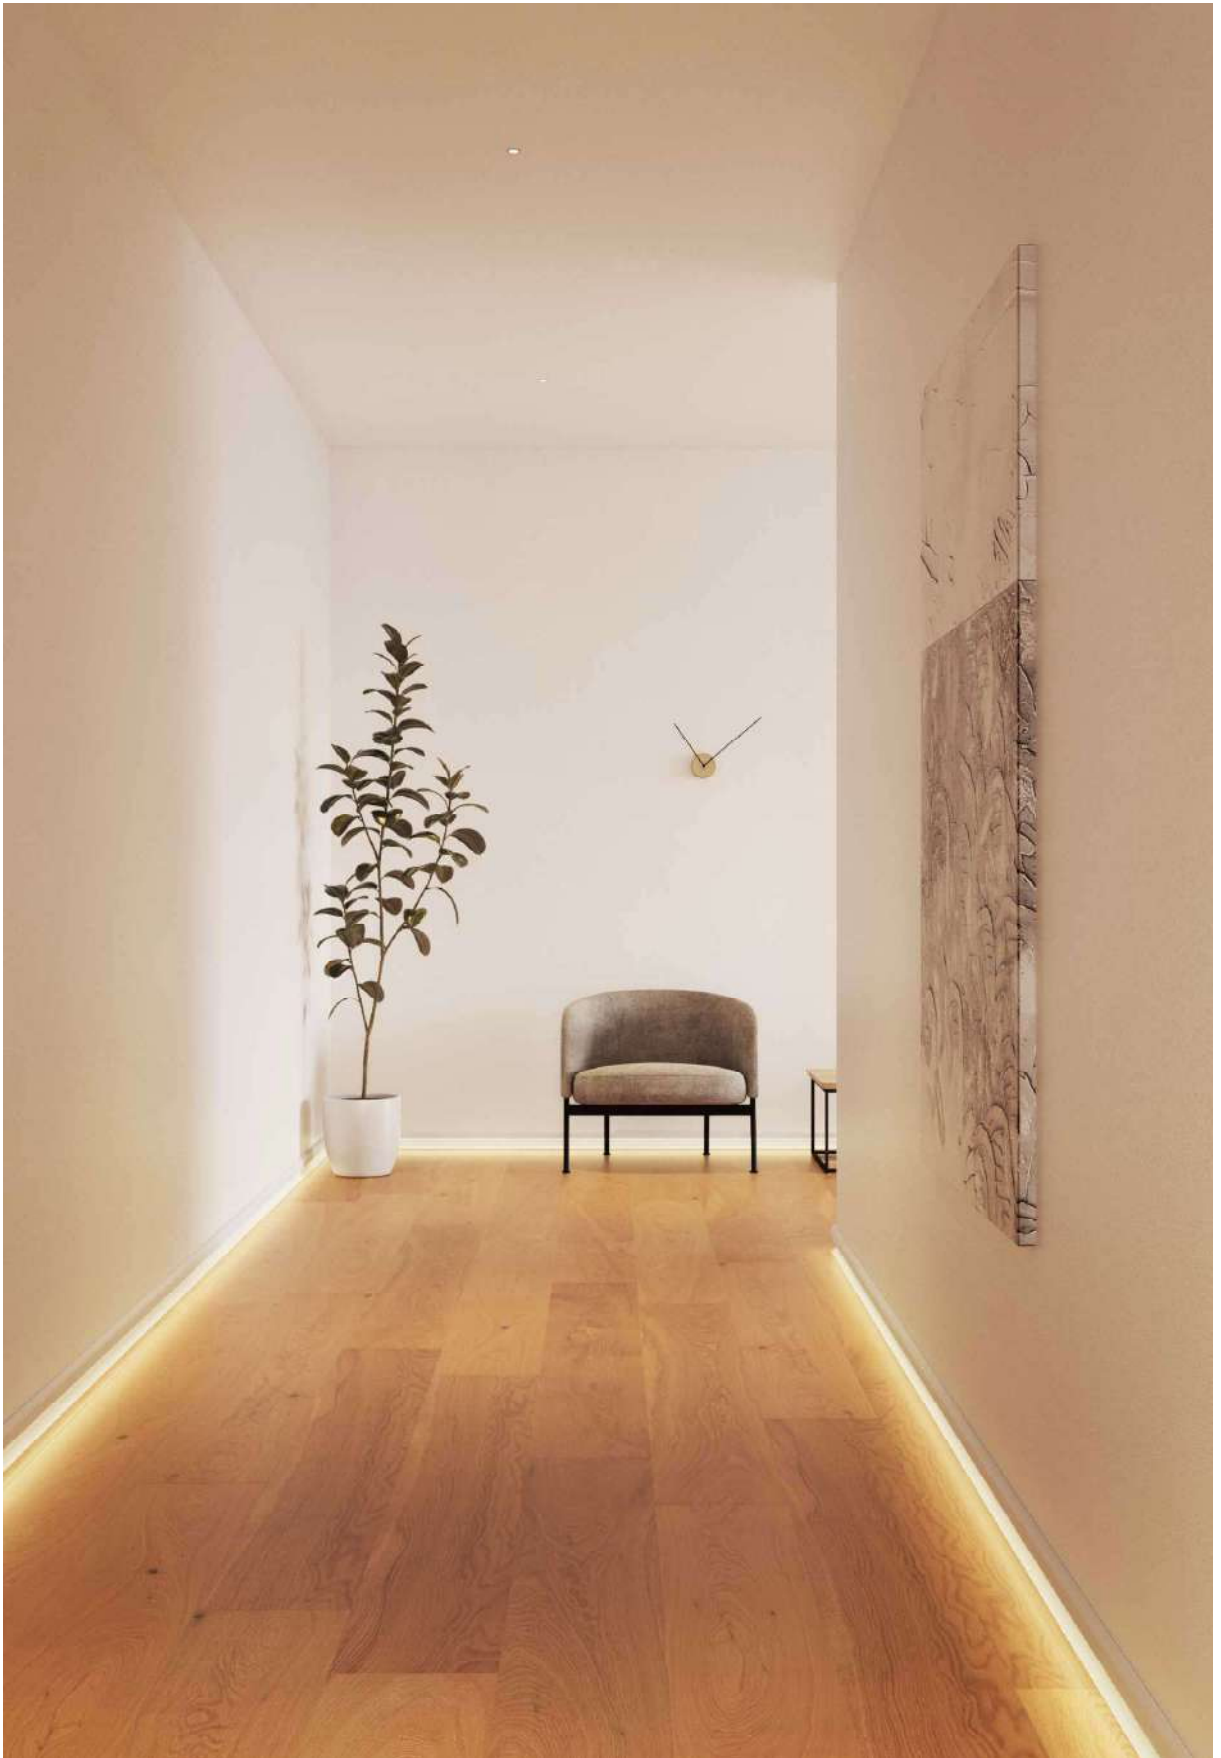


New


Box 65



*Useful area: 10x3mm.



Compatible
led strips p. 294.



Technical Information

Max. power	12W/m
Installation	Surface / skirting
Material	Aluminium
Finishes	White / Black / Aluminium
Code	☐ 65121
	☒ 65122
	☐ 65119
	Custom RAL
	Electrolytic Plating


Consult delivery terms and conditions.

Accessories

Diffuser PC Opal 70% ☐ 65440	End Cap ☐ 65621 ☒ 65622 ☐ 65623	90° outside connector ☐ 65221 ☒ 65222 ☐ 65223	90° inside connector ☐ 65331 ☒ 65332 ☐ 65333	Joint 180° Metallic ☐ 65550




3 YEARS WARRANTY | IP 20 | 2m Max AL 6063


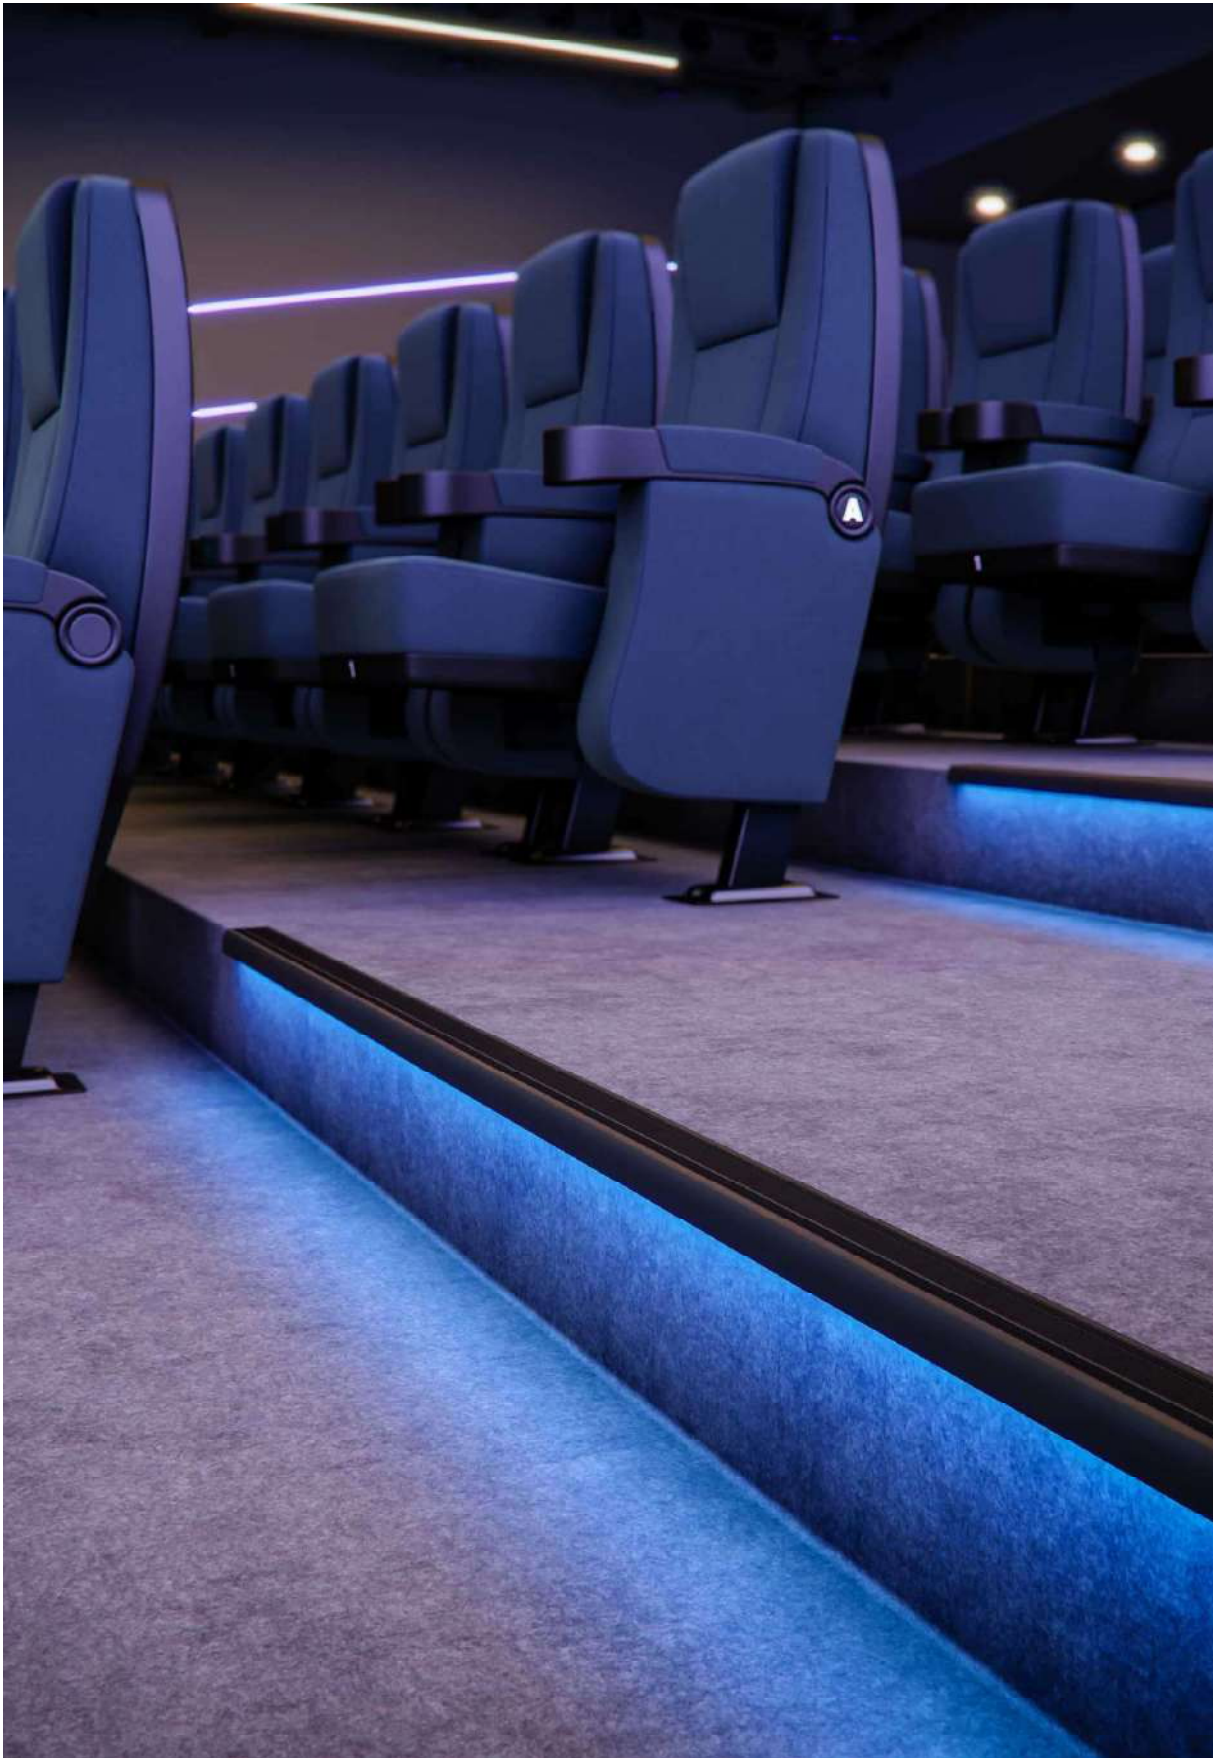


New

Box 67



*Useful area: 12x3mm.

Compatible
led strips p. 294.

Technical Information


Max. power	12W/m
Installation	Surface / stairs
Material	Aluminium
Finishes	Black
Code	■ 67122

Accessories

Diffuser PC
Opal 70%
■ 67440End Cap
■ 67632PVC anti-skid cover
■ 67452

3 YEARS WARRANTY | IP 20 |  | 2m Max  | AL 6063

Box 29



*Useful area: 12x18mm.



 +  Compatible led strips p. 294.

Technical Information

Max. power	25W/m
Installation	Recessed
Material	Aluminium
Finishes	Aluminium
Code	 29119  Custom RAL  Electrolytic Plating

 Consult delivery terms and conditions.

Accessories




Diffuser PC
Opal 70%
 29480




End Cap
 29623



3 YEARS WARRANTY | IP 55 |  |  IK10 |  1000kg | 2m Max  | AL 6063

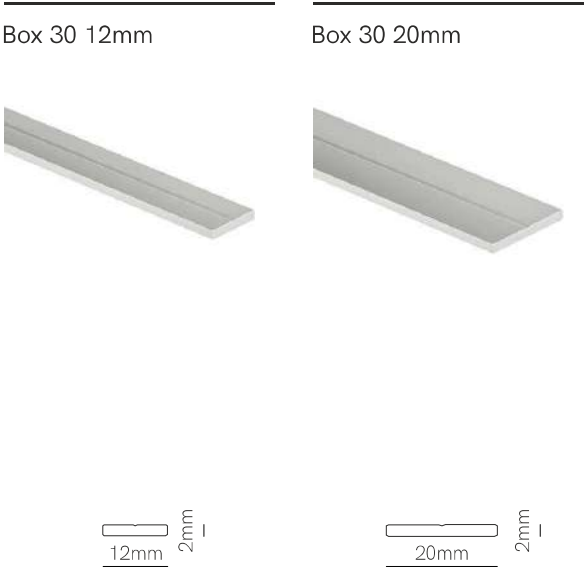

Compatible
led strips p. 294.



Technical Information

Max. power	20W/m	40W/m
Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	Aluminium	Aluminium
Code	30129 Custom RAL Electrolytic Plating	30209 Custom RAL Electrolytic Plating



Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 2m Max | AL 6063



LED Strips

	Model	Page	Power	Width	CCT
NEW	FINE 64	216	2,5W/m	10mm	2700K 3000K 4000K
	FINE 84	219	4,8W/m	10mm	2700K 3000K 4000K 6000K
NEW	FINE 48	217	5W/m	10mm	2200K 2700K 3000K 4000K
	FINE 51	236	9,6W/m	10mm	2700K 3000K 4000K 6000K
	FINE 69	221	9,6W/m	10mm	NEW 2200K 2700K 3000K 4000K 6000K
	FINE 49	235	10W/m	4mm	2700K 3000K 4000K 6000K
	FINE 31	225	12W/m	10mm	NEW 2200K 2700K 3000K 4000K
	FINE 41	223	14,4W/m	10mm	2700K 3000K 4000K 6000K
	FINE 32 N	237	15W/m	12mm	2700K 3000K 4000K 6000K
	FINE 61	227	15W/m	10mm	2700K 3000K 4000K 6000K
NEW	FINE 76	231	15W/m	12mm	3000K 4000K
	FINE 52	229	22W/m	10mm	2700K 3000K 4000K 6000K
	FINE 56	232	22W/m	15mm	2700K 3000K 4000K CCT
	FINE 55	233	24W/m	20mm	2700K 3000K 4000K
NEW	FINE 96	230	18W/m	18,5mm	3000K 4000K RGB-W
	FINE 50	252	9,6W/m	5mm	RGB
NEW	FINE 54	247	14W/m	10mm	RGB
	FINE 46	249	14,4W/m	10mm	RGB
	FINE 43	251	19,2W/m	12mm	RGB


Lumens	CRI	Density	Voltage	IP20	IP65	IP67
110-120 Lm/W					-	-
95-102 Lm/W						-
110-135 Lm/W					-	-
100 Lm/W						
87-102 Lm/W						-
71-77 Lm/W					-	-
85-100 Lm/W						
92-102 Lm/W						
100-110 Lm/W				-		-
110-125 Lm/W						-
120-128 Lm/W					-	-
97-112 Lm/W						
130-170 Lm/W					-	-
80-86 Lm/W					-	-
67,5-120 Lm/W				-		
58 Lm/W	-				-	-
45-50 Lm/W	-					
38-41 Lm/W	-					-
90 Lm/W	-				-	-

	Model	Page	Power	Width	CCT
	FINE 47	254	14,4W/m	12mm	
	FINE 66	253	20W/m	12mm	
NEW	FINE 71	255	21W/m	12mm	
	FINE 36	244	12W/m	10mm	
NEW	FINE 63	243	19W/m	10mm	
	FINE 42	245	19,2W/m	10mm	
	FINE 45	257	10W/m	10mm	  
	FINE 44	239	14,4W/m	10mm	   
NEW	FINE RUNNING	259	12W/m	10mm	 
	FINE 25	268	20W/m	Ø25mm	     
	FINE 70	272	5W/m	12,8mm	   
	FINE 72	276	10W/m	16mm	   
	FINE 74	278	10W/m	24mm	   
NEW	FINE SPI-2	260	14W/m	10mm	
NEW	FINE SPI-3	261	11W/m	10mm	
NEW	FINE SPI-4	263	20W/m	Ø25mm	
NEW	FINE DMX-4	264	12W/m	12mm	
NEW	FINE DMX-5	265	17W/m	12mm	

Lumens	CRI	Density	Voltage	IP20	IP65	IP67
18-60 Lm/W	-	60 LED/m	24 VDC		-	-
172 Lm/W	-	840 LED/m	24 VDC		-	
29-117 Lm/W	-	96 LED/m	24 VDC		-	
100 Lm/W	≥90 CRI	140 LED/m	24 VDC		-	-
89-95 Lm/W	≥90 CRI	640 LED/m	24 VDC		-	
90 Lm/W	≥90 CRI	168 LED/m	24 VDC			-
15-91 Lm/W	-	480 LED/m	24 VDC		-	
85-95 Lm/W	75/97 CRI	140 LED/m	24 VDC		-	-
79-87 Lm/W	≥90 CRI	360 LED/m	24 VDC		-	-
41-73 Lm/W	≥90 CRI	240-480 LED/m	24 VDC	-	-	
15-37 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
26-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
22-65 Lm/W	≥90 CRI	96/140 LED/m	24 VDC	-	-	
37 Lm/W	-	84 LED/m	24 VDC		-	-
51 Lm/W	-	60 LED/m	24 VDC		-	-
12,5 Lm/W	-	168 LED/m	24 VDC	-	-	
42 Lm/W	-	70 LED/m	24 VDC		-	
50 Lm/W	-	70 LED/m	24 VDC		-	

New

Fine 64

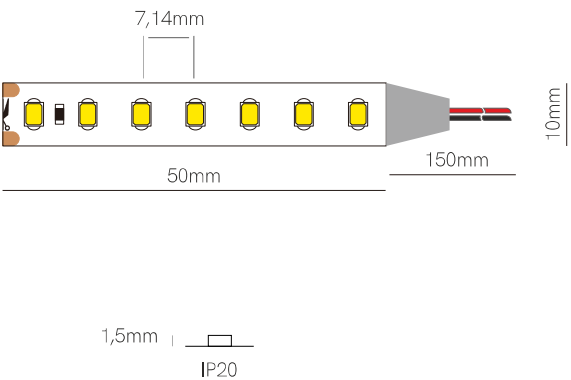

Compatible
profiles p. 294.

Technical Information

V / A / W

24V / 0,1A / 2,5W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	64270	110 lm/w	275 lm/m	2700K	IP20
	64300	115 lm/w	287 lm/m	3000K	IP20
	64400	120 lm/w	300 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999



*Available in reel of 10 meters.

Accessories pages 282-293.

5 YEARS
WARRANTY

2,5
W/m

140
LED/m

CRI
≥90

24
VDC

50mm




2835



New

Fine 48

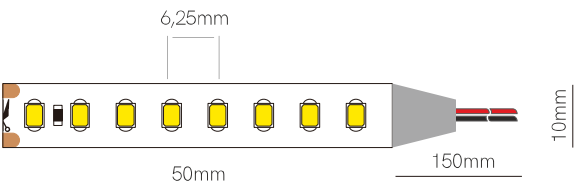

1,5mm | IP20

Compatible
profiles p. 294. +



Technical Information

V / A / W	24V / 0,2A / 5W/m
-----------	-------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	48220	110 lm/w	550 lm/m	2200K	IP20
	48270	120 lm/w	600 lm/m	2700K	IP20
	48300	130 lm/w	650 lm/m	3000K	IP20
	48400	135 lm/w	675 lm/m	4000K	IP20

Accessories



Joint
13,8x11,55x3,9mm
 20220



Joint
13,55x11,67x4,7mm
 20120



Joint
15,4x11,5x5,7mm
 20991



Joint
21,6x11,5x5,7mm
 20999



*Available in reel of 10 meters.

Accessories pages 282-293.

5 YEARS WARRANTY

5 W/m

160 LED/m

CRI ≥ 90

24 VDC

50mm


2835



Fine 84



Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,2A / 4,8W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	84270	95 lm/w	456 lm/m	2700K	IP20
	84300	98 lm/w	470 lm/m	3000K	IP20
	84400	100 lm/w	480 lm/m	4000K	IP20
	84600	102 lm/w	489 lm/m	6000K	IP20
	84275	90 lm/w	432 lm/m	2700K	IP65
	84305	92 lm/w	441 lm/m	3000K	IP65
	84405	95 lm/w	456 lm/m	4000K	IP65
	84605	97 lm/w	465 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

4,8 W/m


70 LED/m

CRI ≥90


24 VDC

100mm


2835

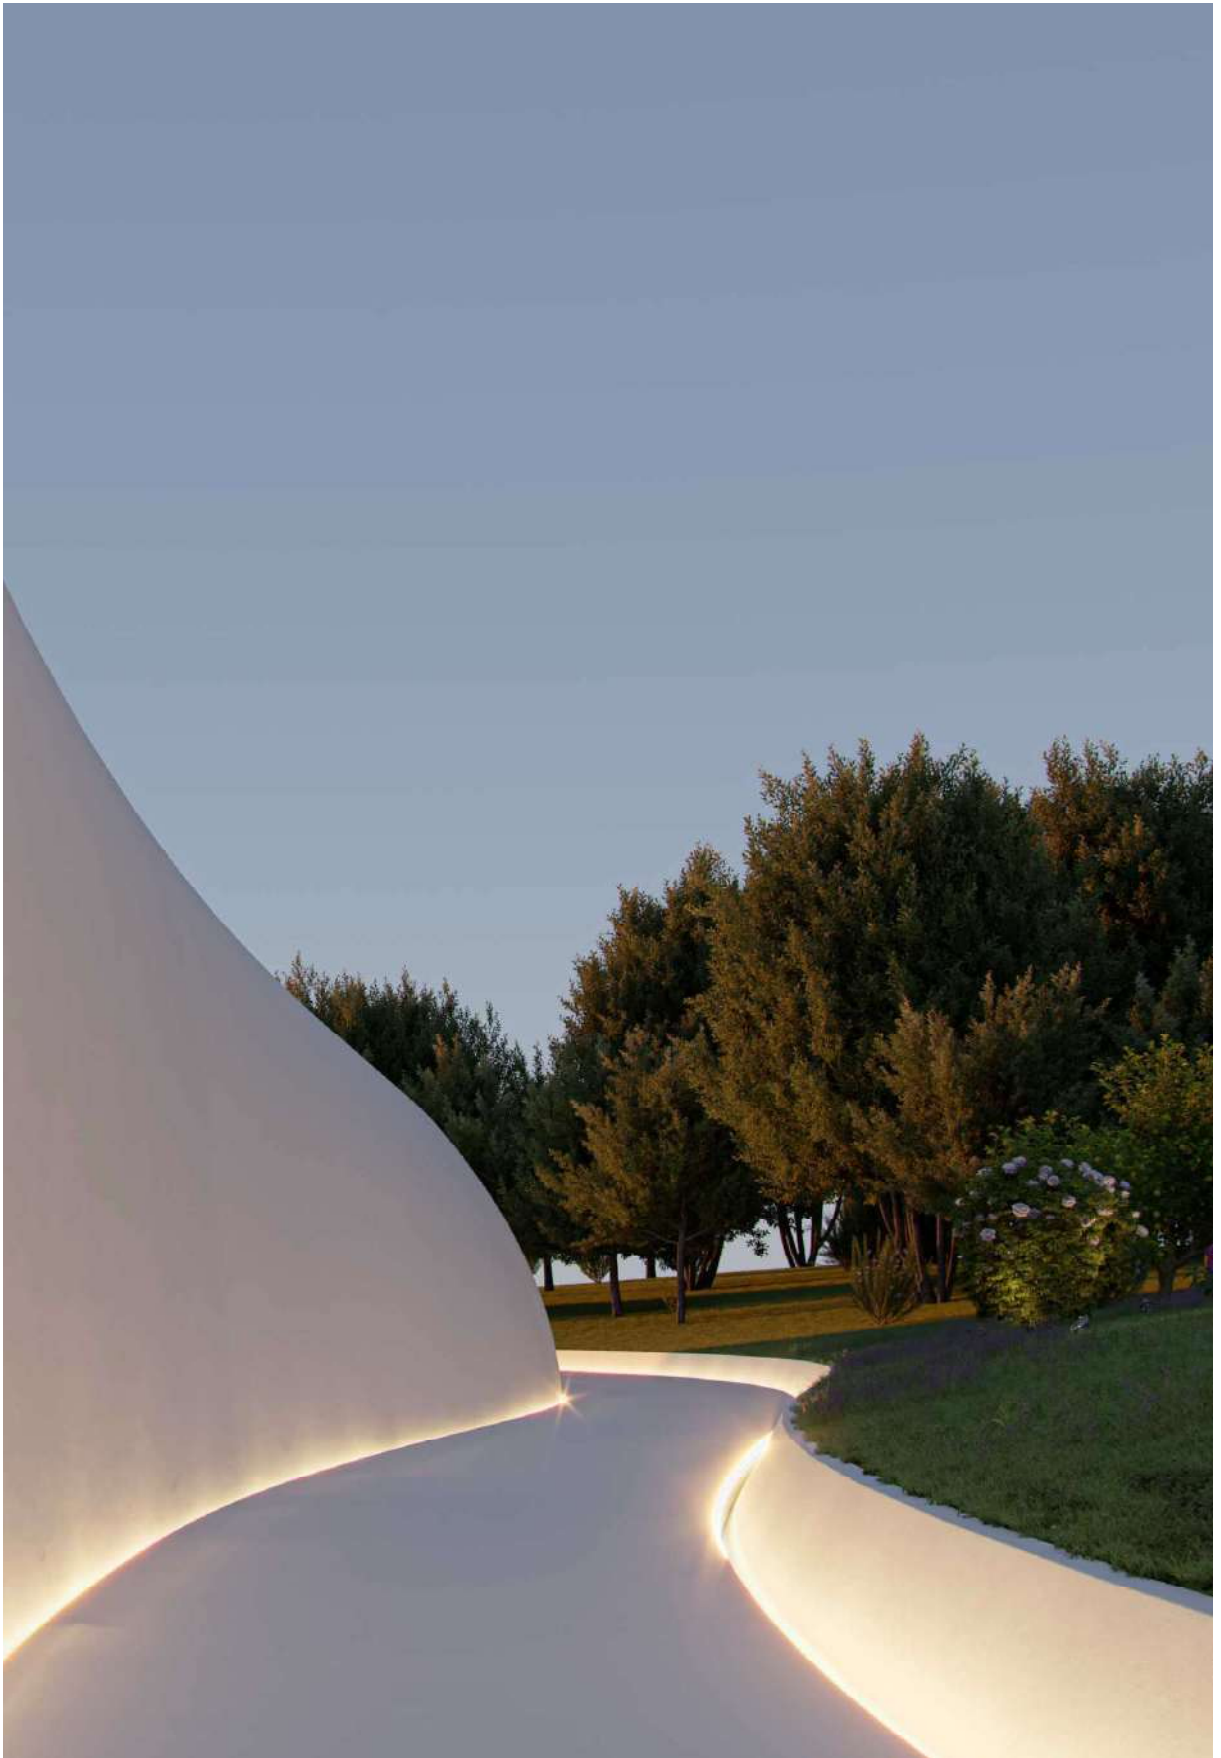

Fine 69

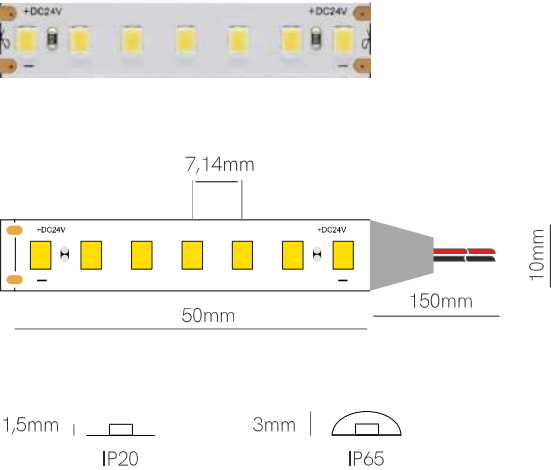

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,4A / 9,6W/m
-----------	---------------------

	Code		Lumen/w	Lumen/m	CCT	IP
Code	69220	New	87 lm/w	835 lm/m	2200K	IP20
	69270		95 lm/w	912 lm/m	2700K	IP20
	69300		98 lm/w	940 lm/m	3000K	IP20
	69400		100 lm/w	960 lm/m	4000K	IP20
	69600		102 lm/w	979 lm/m	6000K	IP20
	69225	New	87 lm/w	835 lm/m	2200K	IP65
	69275		90 lm/w	864 lm/m	2700K	IP65
	69305		92 lm/w	883 lm/m	3000K	IP65
	69405		95 lm/w	912 lm/m	4000K	IP65
	69605		97 lm/w	931 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

9,6 W/m


140 LED/m

CRI ≥90


24 VDC

50mm


2835

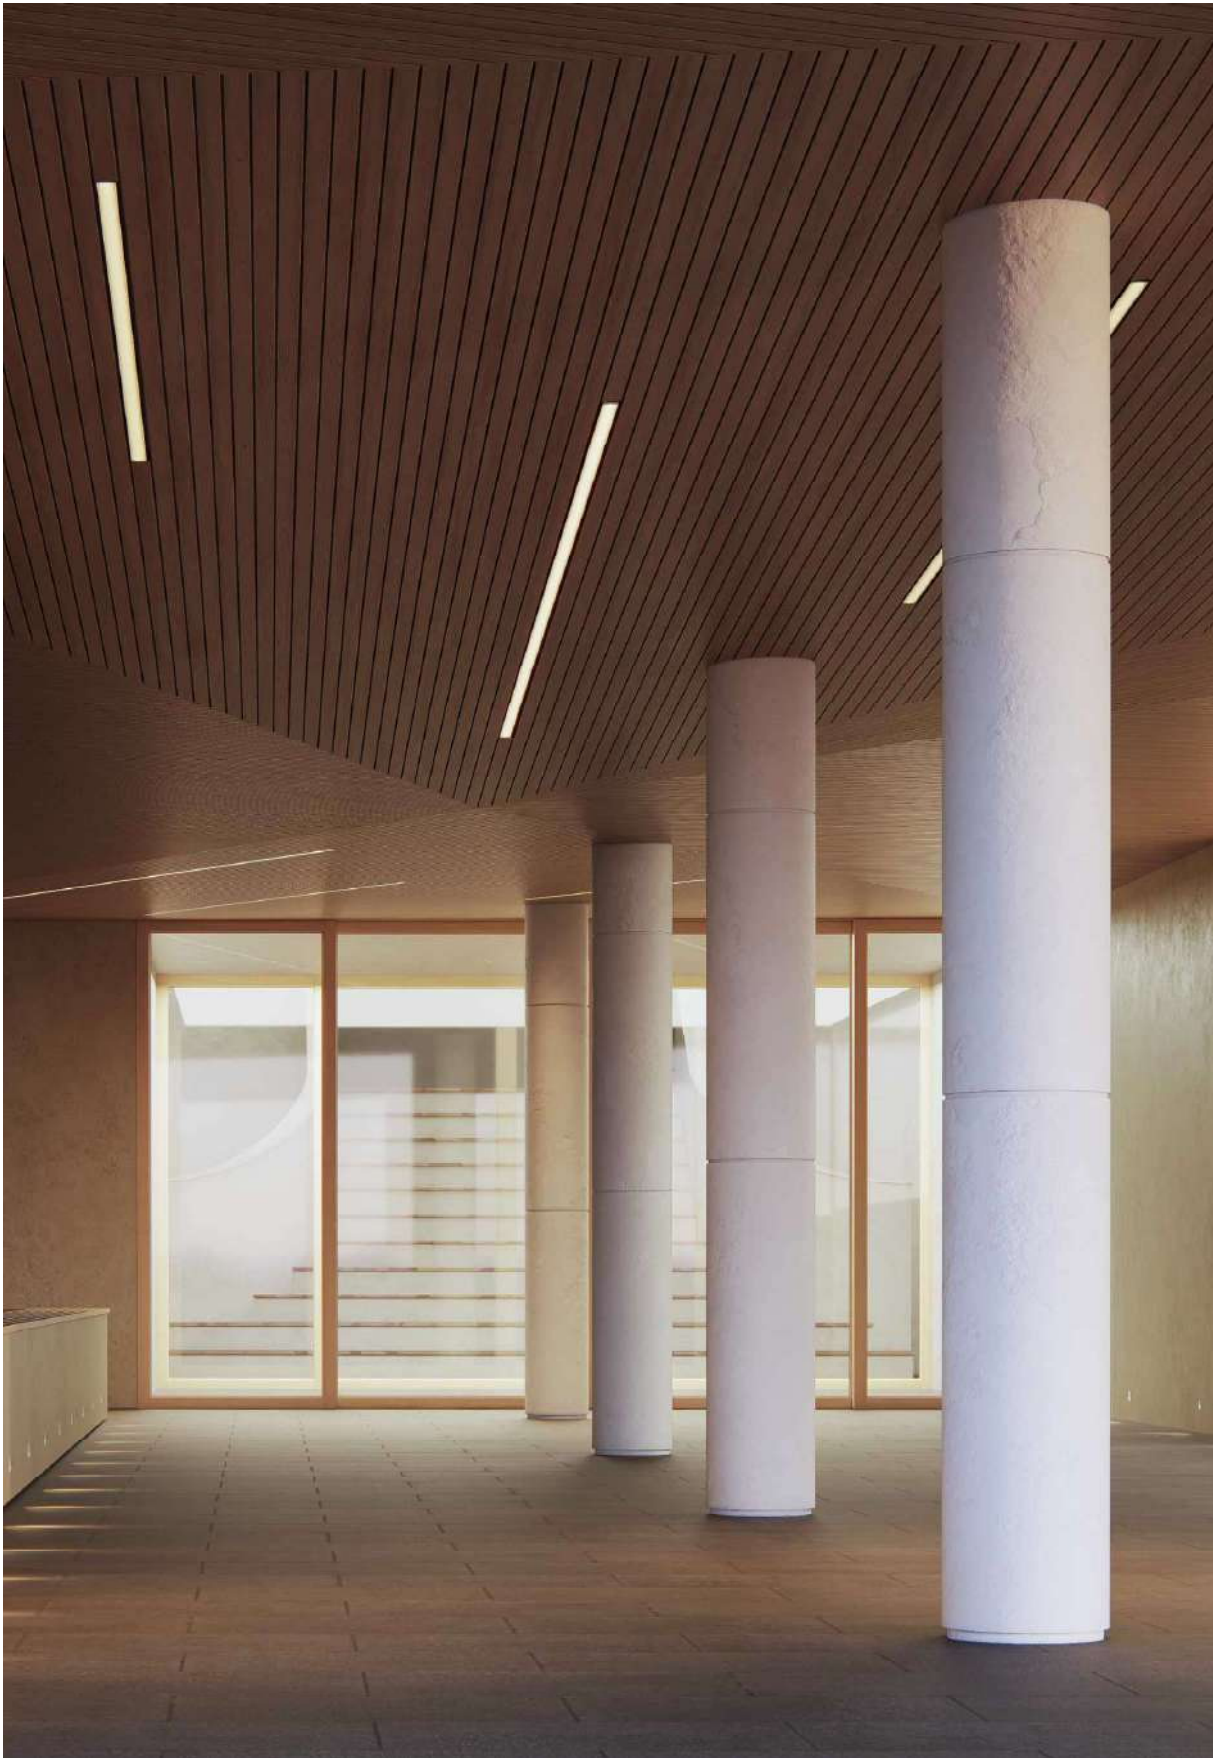

Fine 41

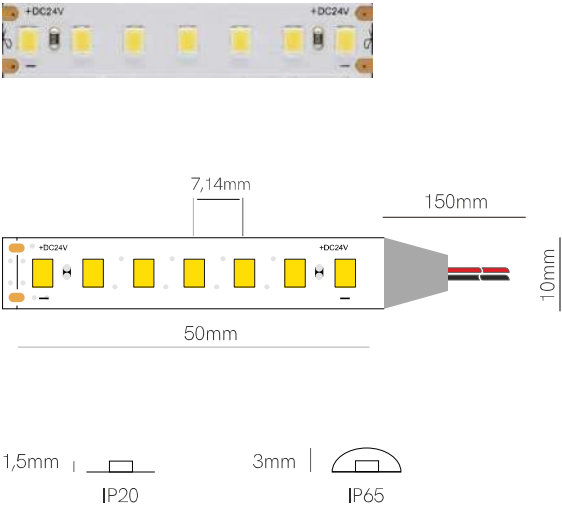

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,6A / 14,4W/m
-----------	----------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	41270	95 lm/w	1,368 lm/m	2700K	IP20
	41300	98 lm/w	1,411 lm/m	3000K	IP20
	41400	100 lm/w	1,440 lm/m	4000K	IP20
	41600	102 lm/w	1,468 lm/m	6000K	IP20
	41275	90 lm/w	1,296 lm/m	2700K	IP65
	41305	92 lm/w	1,324 lm/m	3000K	IP65
	41405	95 lm/w	1,368 lm/m	4000K	IP65
	41605	97 lm/w	1,396 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

14,4 W/m

140 LED/m

CRI ≥90


24 VDC

50mm


2835



Fine 31

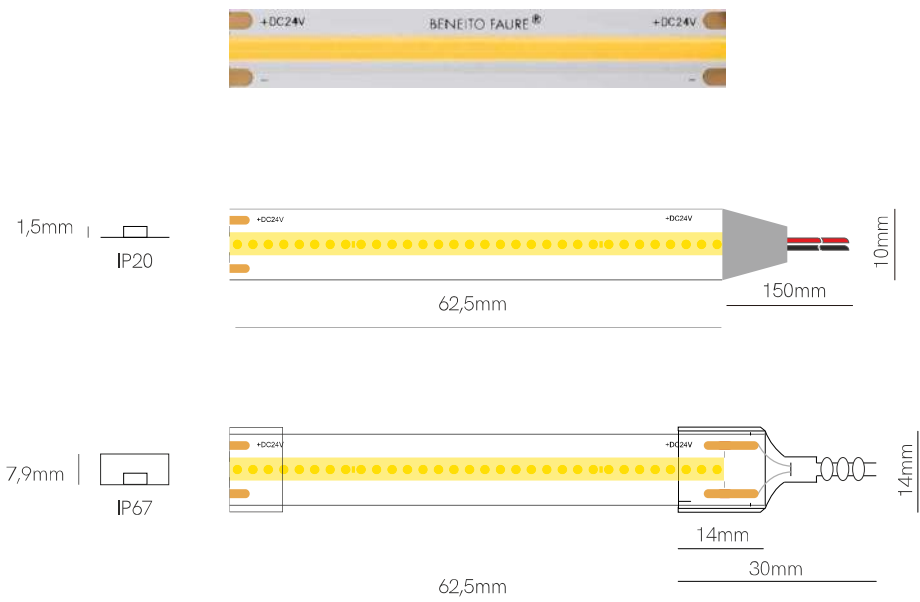

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,5A / 12W/m
-----------	--------------------

Code		Lumens/w	Lumens/m	CCT	IP
31220	New	85 lm/w	1,020 lm/m	2200K	IP20
31270		95 lm/w	1,140 lm/m	2700K	IP20
31300		98 lm/w	1,176 lm/m	3000K	IP20
31400		100 lm/w	1,200 lm/m	4000K	IP20
31227	New	80 lm/w	960 lm/m	2200K	IP67
31277		90 lm/w	1,080 lm/m	2700K	IP67
31307		93 lm/w	1,116 lm/m	3000K	IP67
31407		95 lm/w	1,140 lm/m	4000K	IP67


Accessories




*Available in reel of 5 meters.

Accessories pages 282-293.




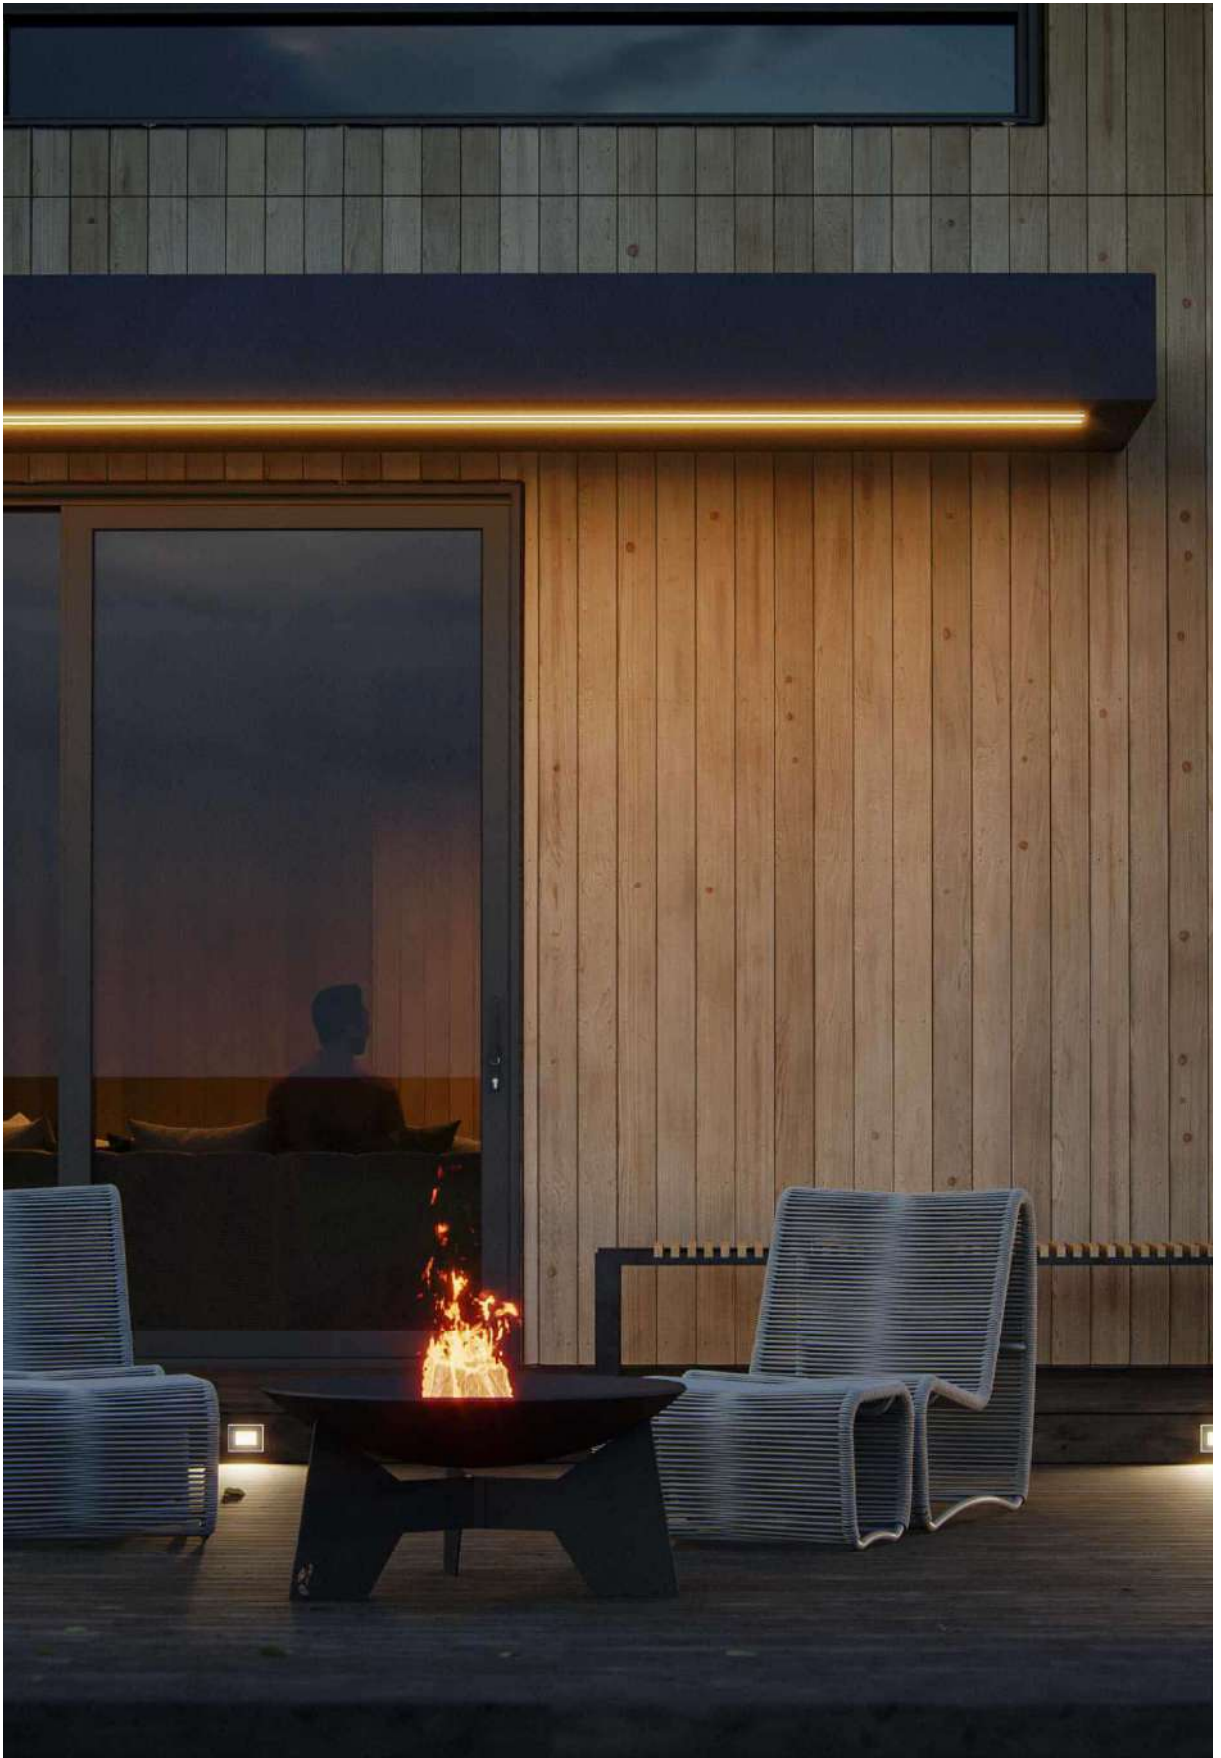

Fine 61

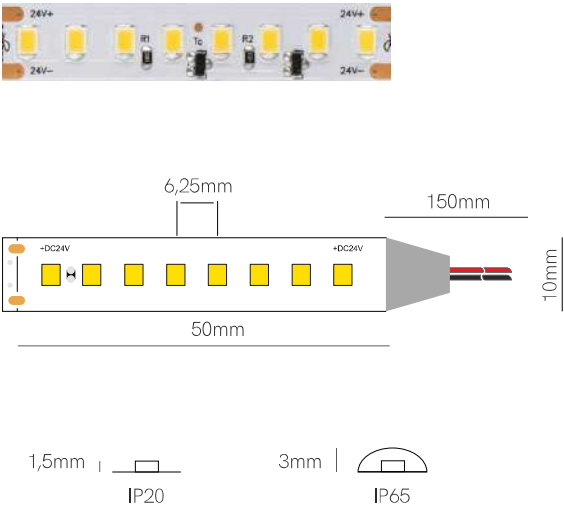

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,62A / 15W/m
-----------	---------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	61270	110 lm/w	1,650 lm/m	2700K	IP20
	61300	115 lm/w	1,725 lm/m	3000K	IP20
	61400	120 lm/w	1,800 lm/m	4000K	IP20
	61600	125 lm/w	1,875 lm/m	6000K	IP20
	61275	110 lm/w	1,650 lm/m	2700K	IP65
	61305	115 lm/w	1,725 lm/m	3000K	IP65
	61405	120 lm/w	1,800 lm/m	4000K	IP65
	61605	125 lm/w	1,875 lm/m	6000K	IP65

Accessories

End Cap	End Cap	Joint	Joint	Joint	Joint	Joint	Joint
20635	20625	13,8x11,55x3,9mm	13,55x11,67x4,7mm	24,3x14,6x7,7mm	24,3x14,6x7,7mm	15,4x11,5x5,7mm	21,6x11,5x5,7mm
		20220	20120	20225	20125	20991	20999



*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY

15 W/m

160 LED/m

CRI ≥90


24 VDC

50mm


2835



Fine 52

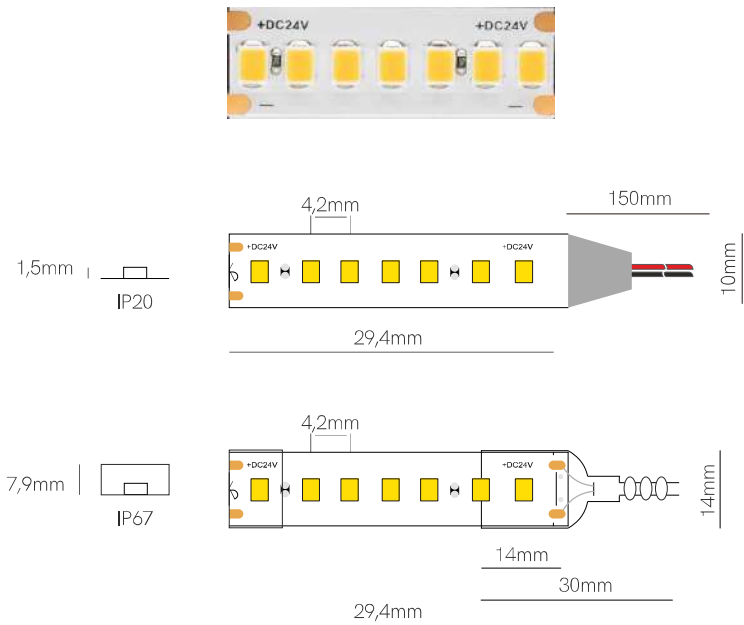

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,91A / 22W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	52270	97 lm/w	2.134 lm/m	2700K	IP20
	52300	103 lm/w	2.266 lm/m	3000K	IP20
	52400	108 lm/w	2.376 lm/m	4000K	IP20
	52600	112 lm/w	2.464 lm/m	6000K	IP20
	52277	97 lm/w	2.134 lm/m	2700K	IP67
	52307	103 lm/w	2.266 lm/m	3000K	IP67
	52407	108 lm/w	2.376 lm/m	4000K	IP67
	52607	112 lm/w	2.464 lm/m	6000K	IP67

Accessories



End Cap
32635



End Cap
32625



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120




*Available in reel of 5 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 22 W/m | 238 LED/m | CRI ≥90 | 24 VDC | 29,4mm | 2835

New

Fine 96

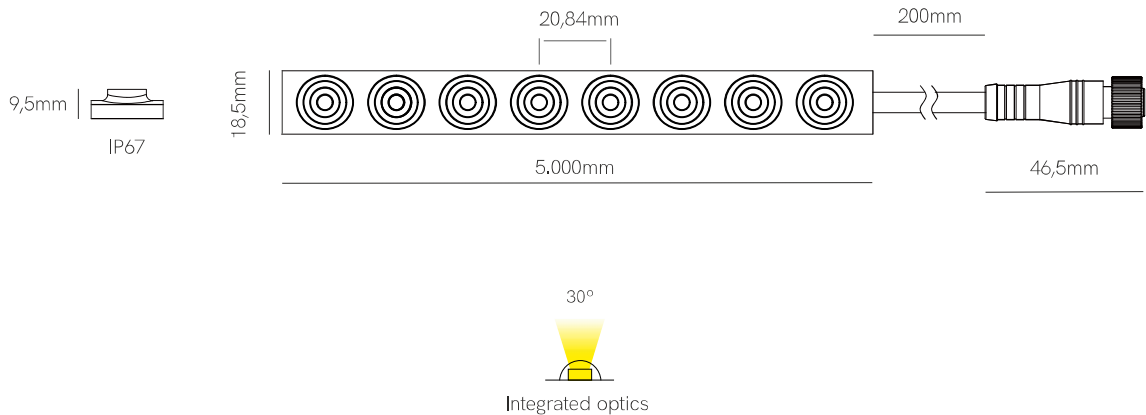

 +   Compatible profiles p. 294.

Technical Information

V / A / W (3.000K / 4.000K)	24V / 0,75A / 18W/m
V / A / W (RGB-W)	24V / 0,33A / 8W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	96307	106 lm/w	1,915 lm/m	3000K	IP67
	96407	120 lm/w	2,167 lm/m	4000K	IP67
	96477	67,5 lm/w	540 lm/m	RGB-W 3,000K	IP67

Accessories



Clip
96119



Clip
96380



Clip
96330



Clip
96350



ADH
96111



Extension cable
96946-M2
96946-M4
96946-H2
96946-H4



Extension cable
96920-2
96920-4



*Available in reel of 5 meters. Accessories pages 282-293.

3 YEARS WARRANTY

18/8 W/m

48 LED/m

CRI ≥90






24 VDC


 2835

New

Fine 76

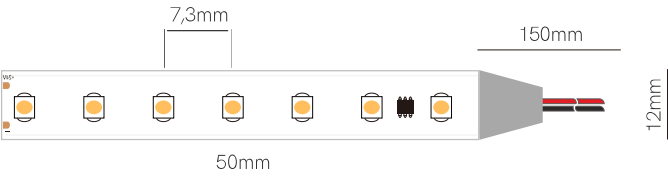

Compatible profiles p. 294.



Technical Information

V / A / W	24V / 0,62A / 15W/m
-----------	---------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	76300	120 lm/w	1,800 lm/m	3000K	IP20
	76400	128 lm/w	1,920 lm/m	4000K	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

15 W/m

126 LED/m


CRI ≥80

24 VDC

50mm

2835 LENS

Fine 56

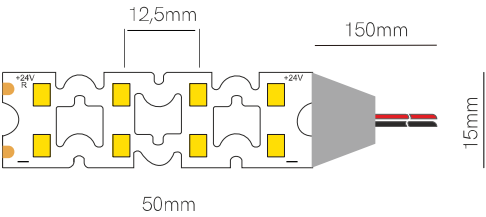

1,5mm |  IP20



Compatible
profiles p. 294.

Technical Information

V / A / W 24V / 0,91A / 22W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	56270	155 lm/w	3,410 lm/m	2700K	IP20
	56300	160 lm/w	3,520 lm/m	3000K	IP20
	56400	170 lm/w	3,740 lm/m	4000K	IP20
	56360	130 lm/w	2,860 lm/m	CCT	IP20





*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 22 W/m | 160 LED/m | CRI ≥80 |  24 VDC | 50 mm   2835

Fine 55

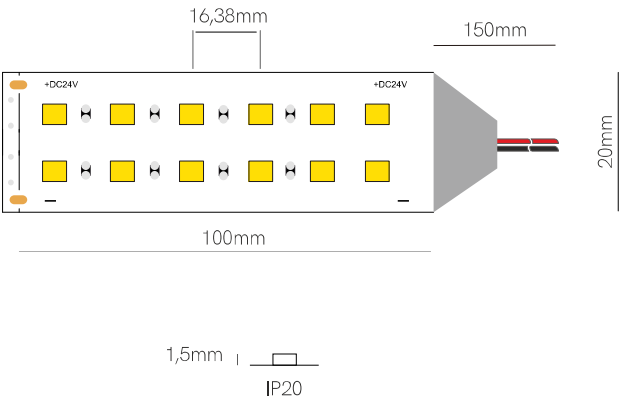

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 1A / 24W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	55270	80 lm/w	1.920 lm/m	2700K	IP20
	55300	83 lm/w	1.992 lm/m	3000K	IP20
	55400	86 lm/w	2.064 lm/m	4000K	IP20



*Available in reel of 5 meters.

Accessories pages 282-293.

5 YEARS
WARRANTY

24
W/m

120
LED/m

CRI
≥90

III


24
VDC

100mm

5050



Fine 49

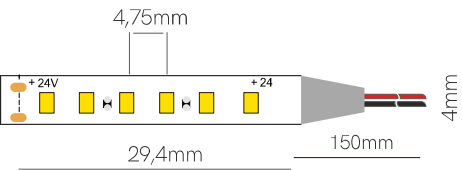

2,2mm | IP20

Compatible
profiles p. 294. +



Technical Information

V / A / W 24V / 0,4A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	49270	71 lm/w	710 lm/m	2700K	IP20
	49300	74 lm/w	740 lm/m	3000K	IP20
	49400	77 lm/w	770 lm/m	4000K	IP20
	49600	74 lm/w	740 lm/m	6000K	IP20

Accessories



Joint
 20049

Joint
 20249



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

10 W/m

204 LED/m

CRI ≥ 90

24 VDC

29,4mm

2216

Fine 51

1,5mm

IP20

6,25mm

50mm

150mm

10mm

7,9mm

IP67

6,25mm

50mm

14mm

30mm

14mm

+

Compatible profiles p. 294.

Technical Information

V / A / W

24V / 0,4A / 9,6W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	51270	100 lm/w	960 lm/m	2700K	IP20
	51300	100 lm/w	960 lm/m	3000K	IP20
	51400	100 lm/w	960 lm/m	4000K	IP20
	51600	100 lm/w	960 lm/m	6000K	IP20
	51277	100 lm/w	960 lm/m	2700K	IP67
	51307	100 lm/w	960 lm/m	3000K	IP67
	51407	100 lm/w	960 lm/m	4000K	IP67
	51607	100 lm/w	960 lm/m	6000K	IP67

Accessories

End Cap
32635

End Cap
32625



*Available in reel of 20 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

9,6 W/m

120 LED/m

CRI ≥90


24 VDC

ULTRALONG


50mm

2835

Fine 32 N

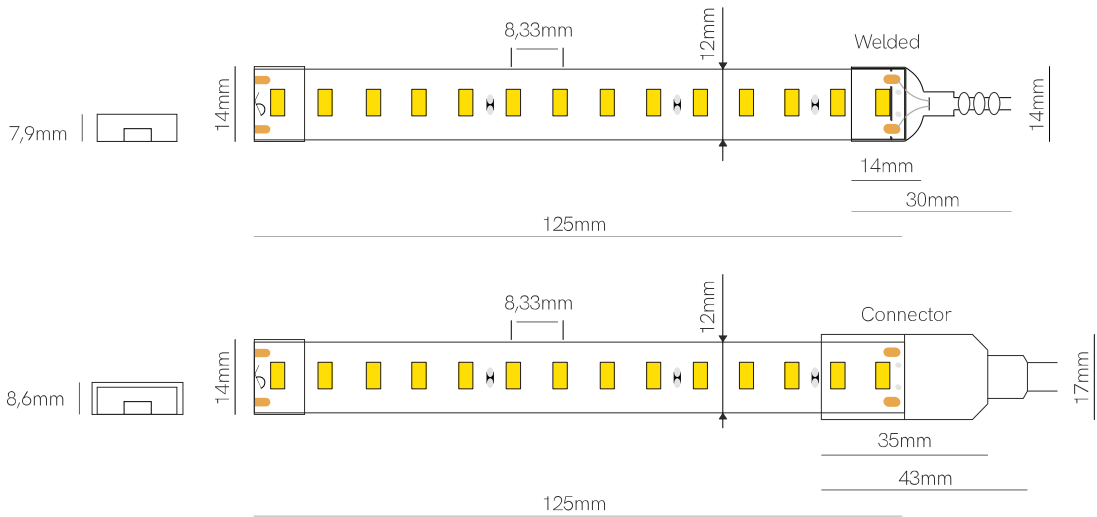

Compatible
profiles p. 294.



Technical Information

V / A / W 220V / 0,068A / 15W/m

	Code	Lumen/w	Lumen/m	CCT	IP
Code	32275-N	100 lm/w	1.500 lm/m	2700K	IP65
	32305-N	105 lm/w	1.575 lm/m	3000K	IP65
	32405-N	110 lm/w	1.650 lm/m	4000K	IP65
	32605-N	110 lm/w	1.650 lm/m	6000K	IP65

Accessories

End Cap
32635

End Cap
32625

Connector kit
32699

Join 180°
32899

Join 90°
32499

Clip
32900

Joint
32299



*Available in reel of 5 or 50 meters. Accessories pages 282-293.

3 YEARS
WARRANTY

15
W/m

112
LED/m

CRI
≥80

220/240
VAC


125mm

TRIAC DIMM


2835



Fine 44

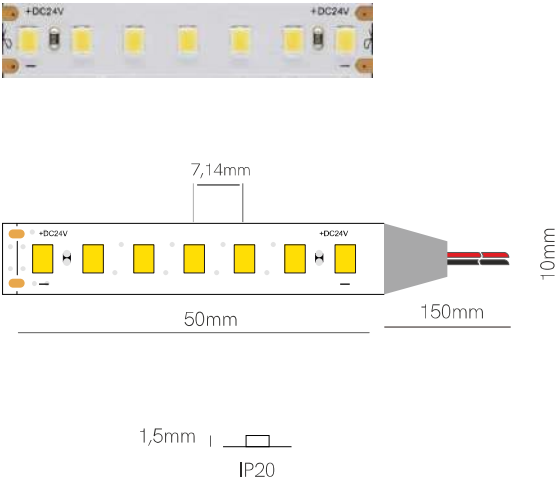

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
	44370	85lm/w	1,224 lm/m	MEAT (3.700K)	IP20
	44110	95 lm/w	1,368 lm/m	FISH (11.600K)	IP20
	44500	90 lm/w	1,296 lm/m	FRUIT (5.000K)	IP20
	44270	80 lm/w	1,152 lm/m	BREAD (2.700K)	IP20

Accessories



Joint
13,8x11,55x3,9mm
20220



Joint
13,55x11,67x4,7mm
20120



Joint
15,4x11,5x5,7mm
20991



Joint
21,6x11,5x5,7mm
20999



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

14,4 W/m


140 LED/m

CRI 75/97


24 VDC

50mm

2835

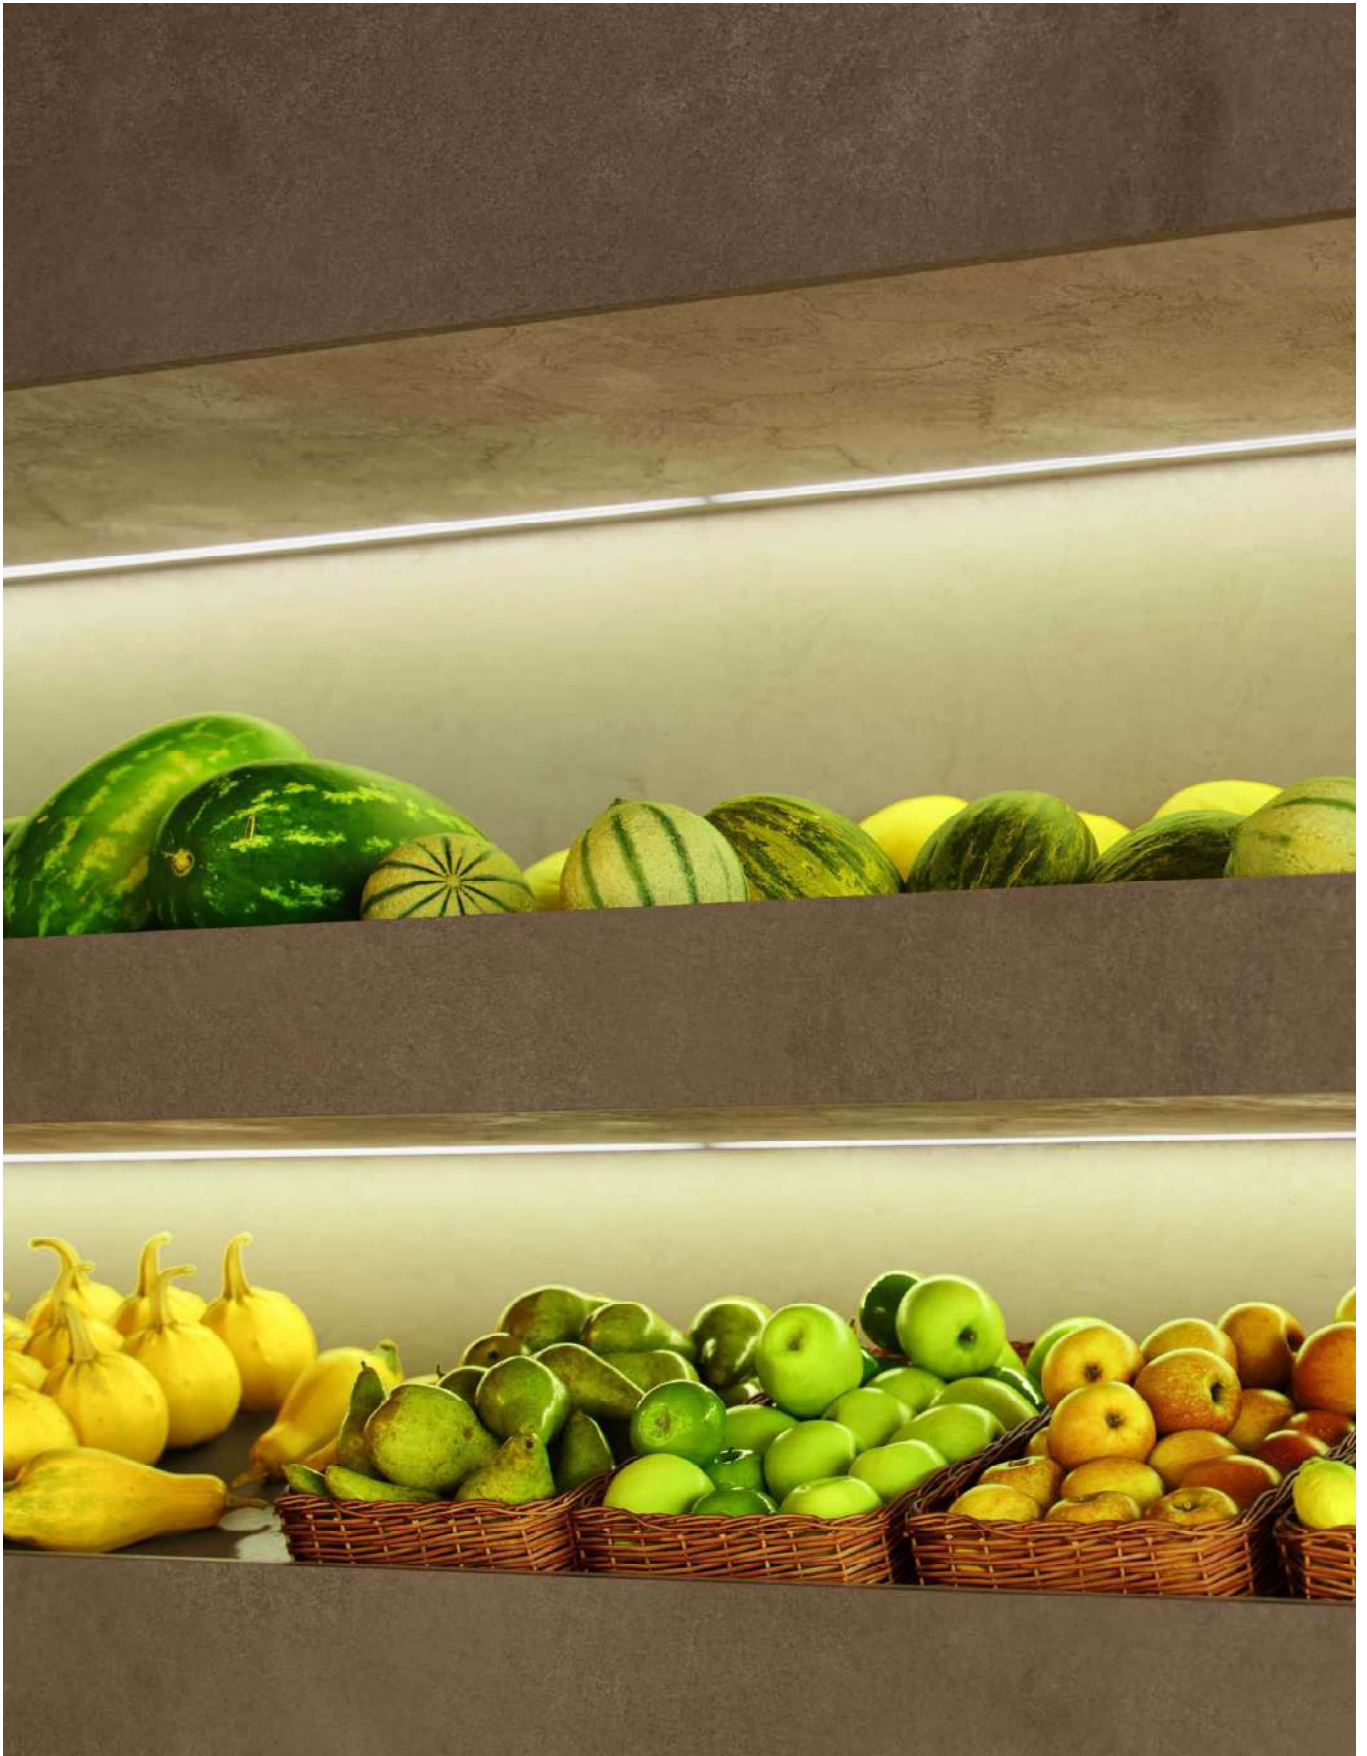




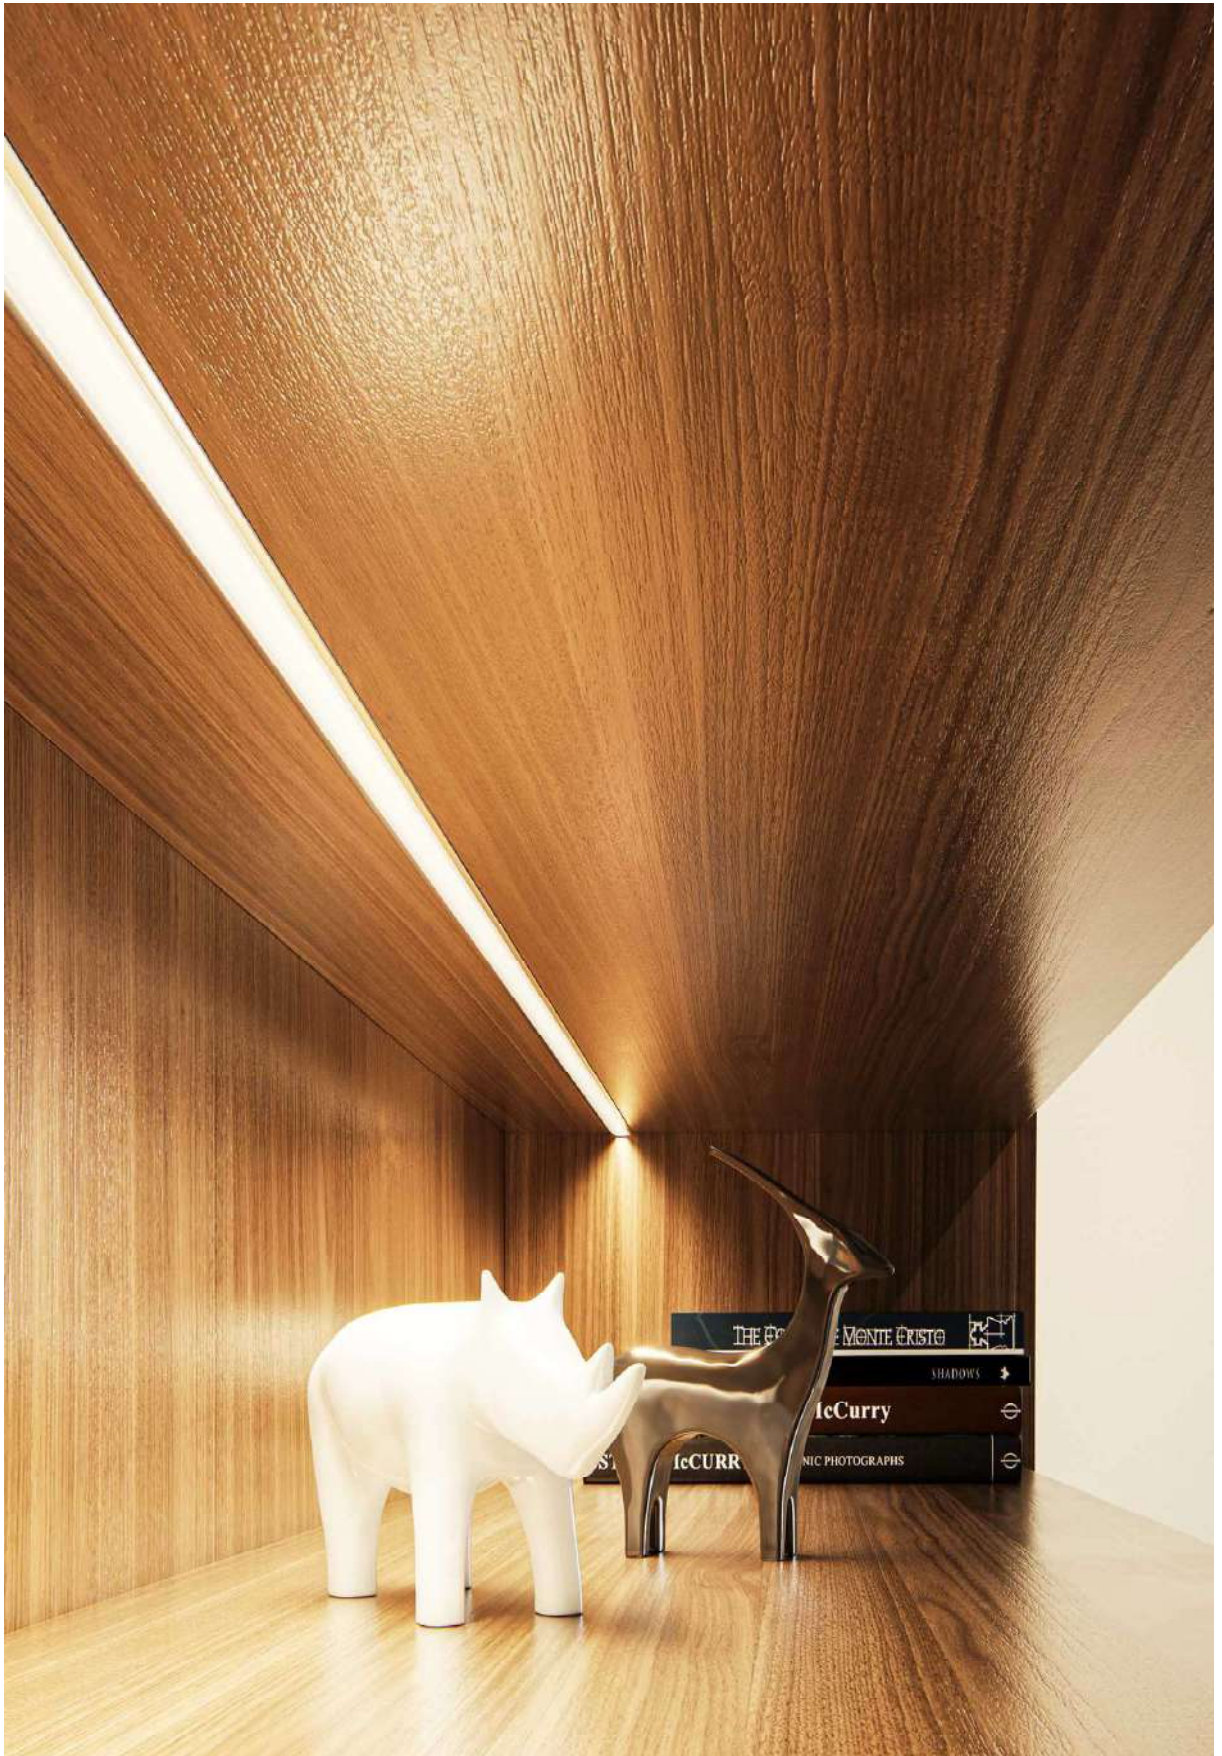


New

Fine 63

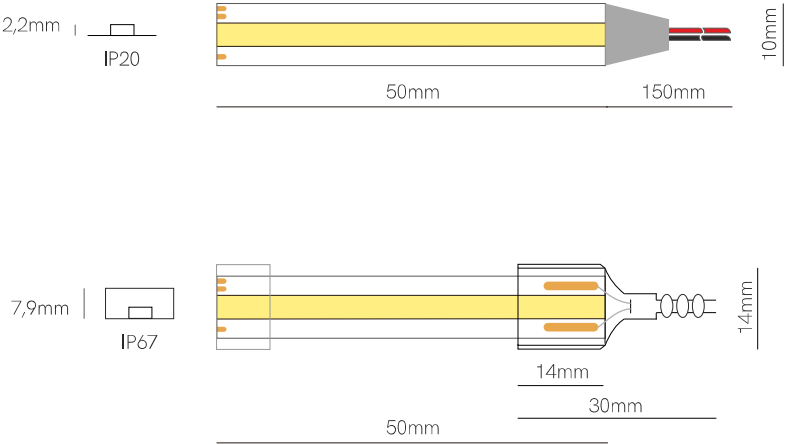

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,79A / 19W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	63360	89-95 lm/w	850-1.750 lm/m	2.700-6.000K	IP20
	63367	89-95 lm/w	850-1.750 lm/m	2.700-6.000K	IP67

Accessories



End Cap
32635




End Cap
32625



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 19 W/m | 640 LED/m | CRI ≥90 | III | 24 VDC | 50mm | COB

Fine 36

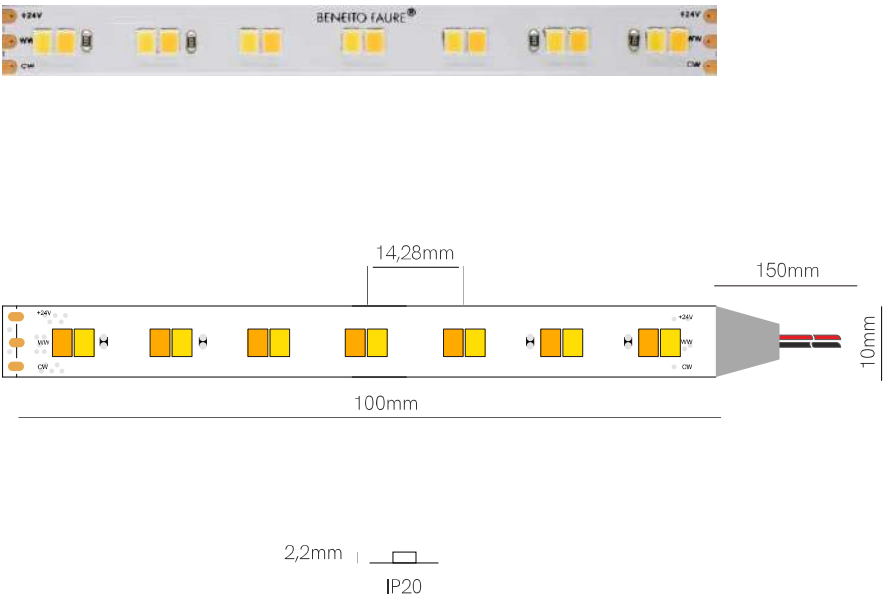

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,5A / 12W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	36360	100 lm/w	1.200 lm/m	2.700-5.000K	IP20

Accessories



Joint
13,57x11,63x3,5mm
20230



Joint
13,57x11,63x4,7mm
20130




*Available in reel of 5 meters.


Accessories pages 282-293.

5 YEARS WARRANTY | 12 W/m | 140 LED/m | CRI ≥90 |  | 24 VDC | 100mm  |  2835

Fine 42

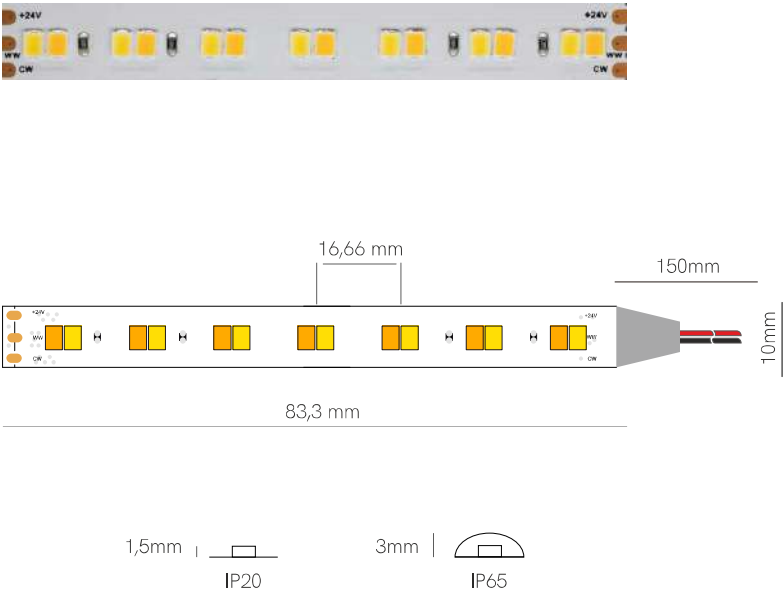

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,8A / 19,2W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	42360	90 lm/w	1.728 lm/m	1.800-4.000K	IP20
	42365	90 lm/w	1.728 lm/m	1.800-4.000K	IP65

Accessories



End Cap
20635



End Cap
20625



Joint
13,57x11,63x3,5mm
20230



Joint
13,57x11,63x4,7mm
20130



Joint
24,3x14,6x7,7mm
20235



Joint
24,3x14,6x7,7mm
20135




*Available in reel of 5 or 25 meters. Accessories pages 282-293.

5 YEARS WARRANTY | 19,2 W/m | 168 LED/m | CRI ≥90 | III | 24 VDC | 83,3mm | 2835




New

Fine 54

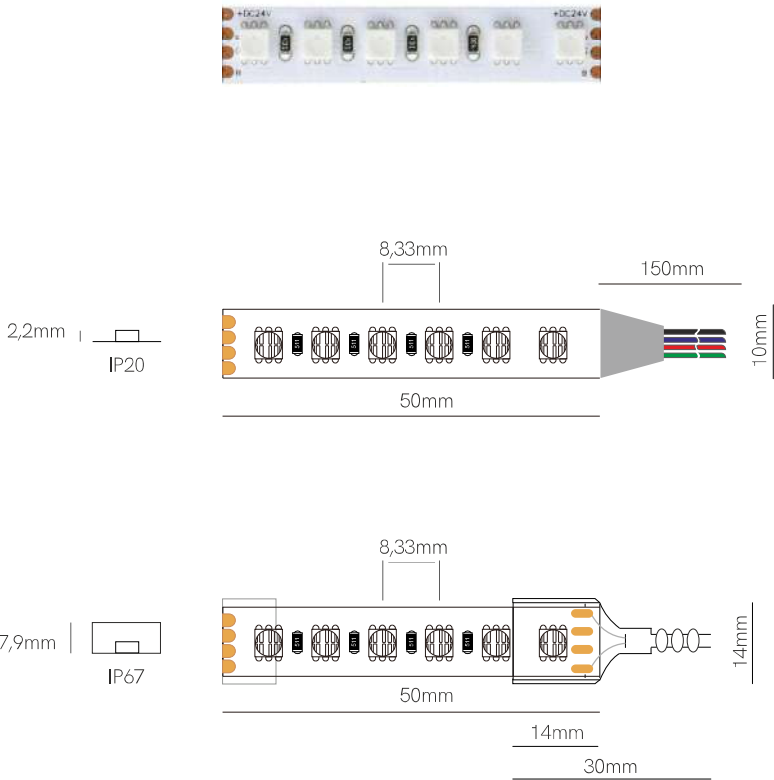

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14W/m

Code	Code	Lumens/w	Lumens/m	CCT	IP
54460		50 lm/w	700 lm/m	RGB	IP20
54467		45 lm/w	630 lm/m	RGB	IP67




*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 14 W/m | 120 LED/m | 24 VDC | 50mm | 4040




Personal training room, Collbató (Spain).

Fine 46

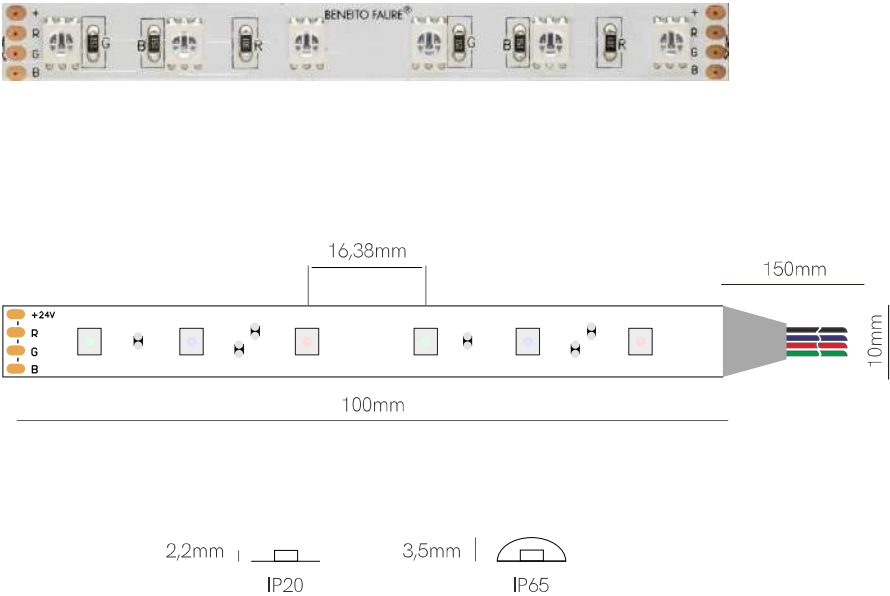

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,6A / 14,4W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	46460	38 lm/w	547 lm/m	RGB	IP20
	46465	41 lm/w	590 lm/m	RGB	IP65

Accessories



End Cap
20635



End Cap
20625



Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140



Joint
24,3x14,6x7,68mm
20245




Joint
24,3x14,6x7,68mm
20145






*Available in reel of 5 or 25 meters. Accessories pages 282-293.


5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC | 50mm | 5050

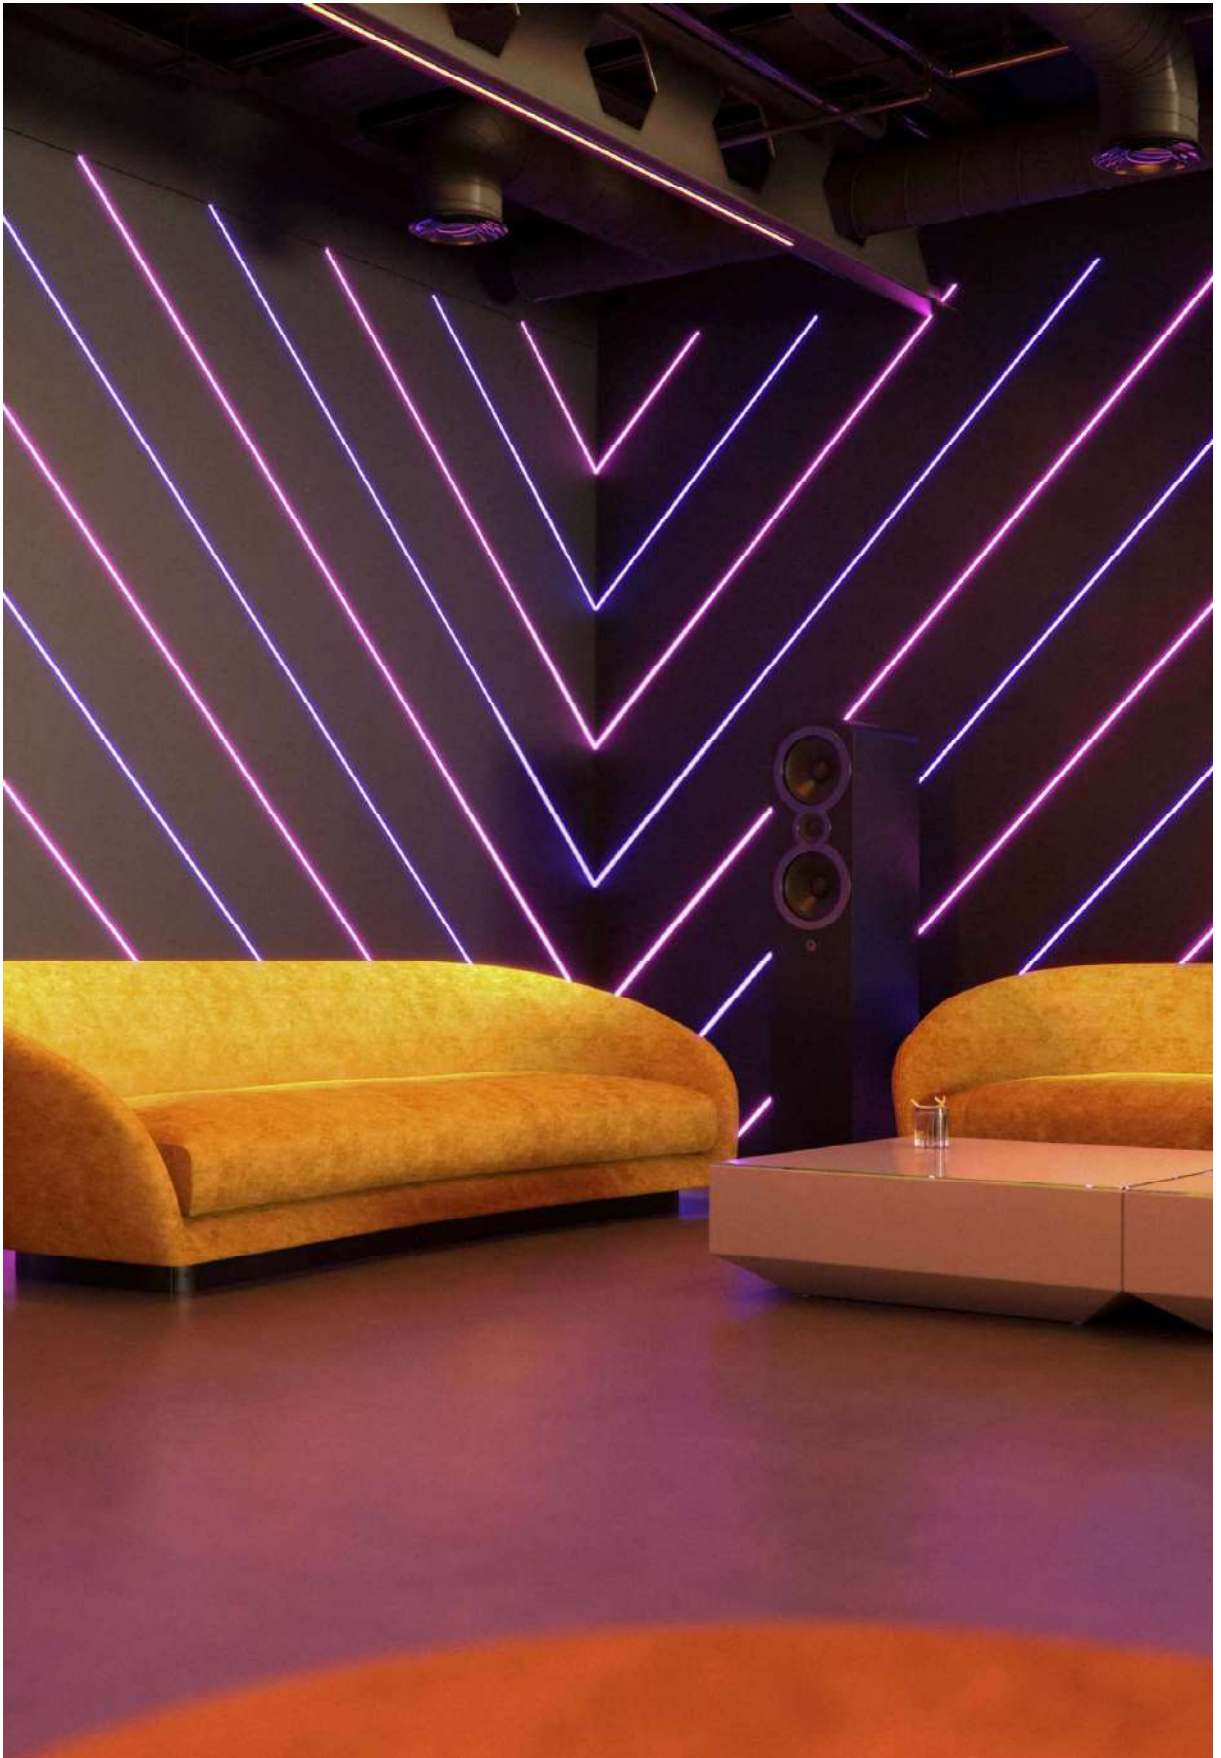

Fine 43

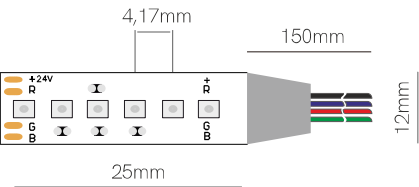

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,8A / 19,2W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	43430	90 lm/w	1.728 lm/m	RGB	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS
WARRANTY

19,2
W/m



240
LED/m

24
VDC

25mm

3535

Fine 50

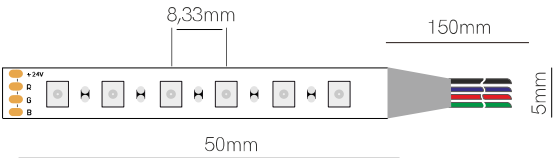

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,4A / 9,6W/m


	Code	Lumens/w	Lumens/m	CCT	IP
Code	50460	58 lm/w	556 lm/m		IP20




*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY | 9,6 W/m | 120 LED/m | 24 VDC |  | 50mm  |  2835

Fine 66

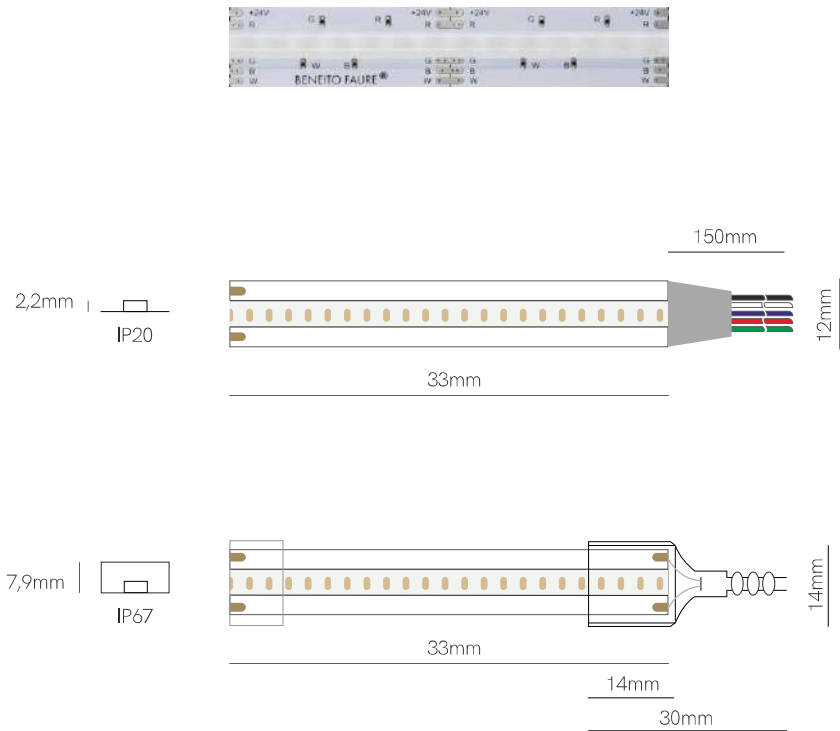

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,83A / 20W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	66470	172 lm/w	830 lm/m	RGB-W 2.700K	IP20
	66477	172 lm/w	830 lm/m	RGB-W 2.700K	IP67

Accessories



Joint
20066


Joint
20266



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY | 20 W/m | 840 LED/m | 24 VDC | 33mm | CSP

Fine 47

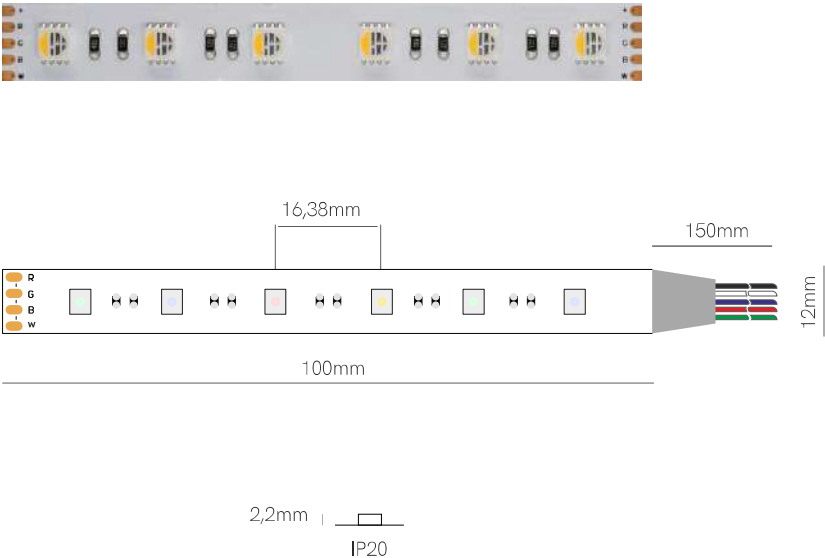

 +   Compatible profiles p. 294.

Technical Information

V / A / W 24V / 0,6A / 14,4W/m

Code		Lumens/w	Lumens/m	CCT	IP
47430		18-60 lm/w	260-864 lm/m	RGB-W 3.000K	IP20
47440	New	18-60 lm/w	260-864 lm/m	RGB-W 4.000K	IP20

Accessories



Joint
13,5x13,73x4,2mm
 20150



Joint
13,5x13,55x4,8mm
 20250




*Available in reel of 5 or 25 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 14,4 W/m | 60 LED/m | 24 VDC |  | 100mm  |  5050

New

Fine 71

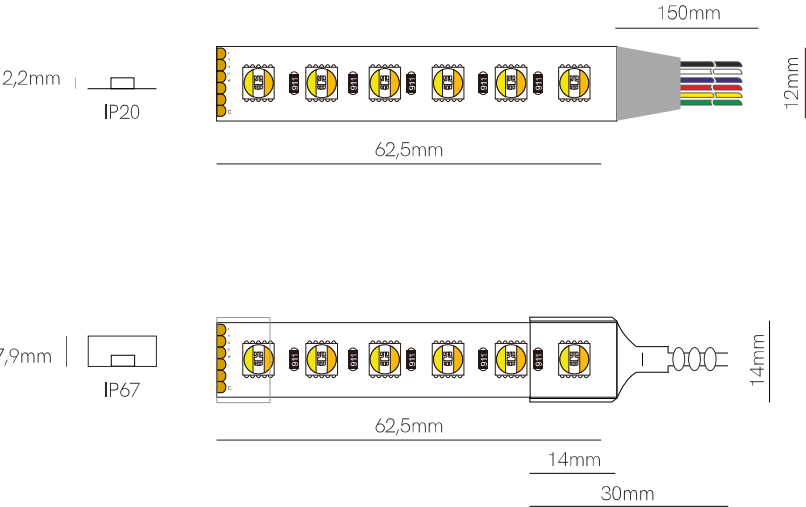

Compatible
profiles p. 294

 +  



Technical Information

V / A / W 24V / 0,875A / 21W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	71470	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP20
	71477	29-117 lm/w	70-1.555 lm/m	RGB-WW 2.700K 6000K	IP67



*Available in reel of 5 meters.
Accessories pages 282-293.

5 YEARS WARRANTY

21 W/m

96 LED/m


24 VDC




62,5mm




 5050

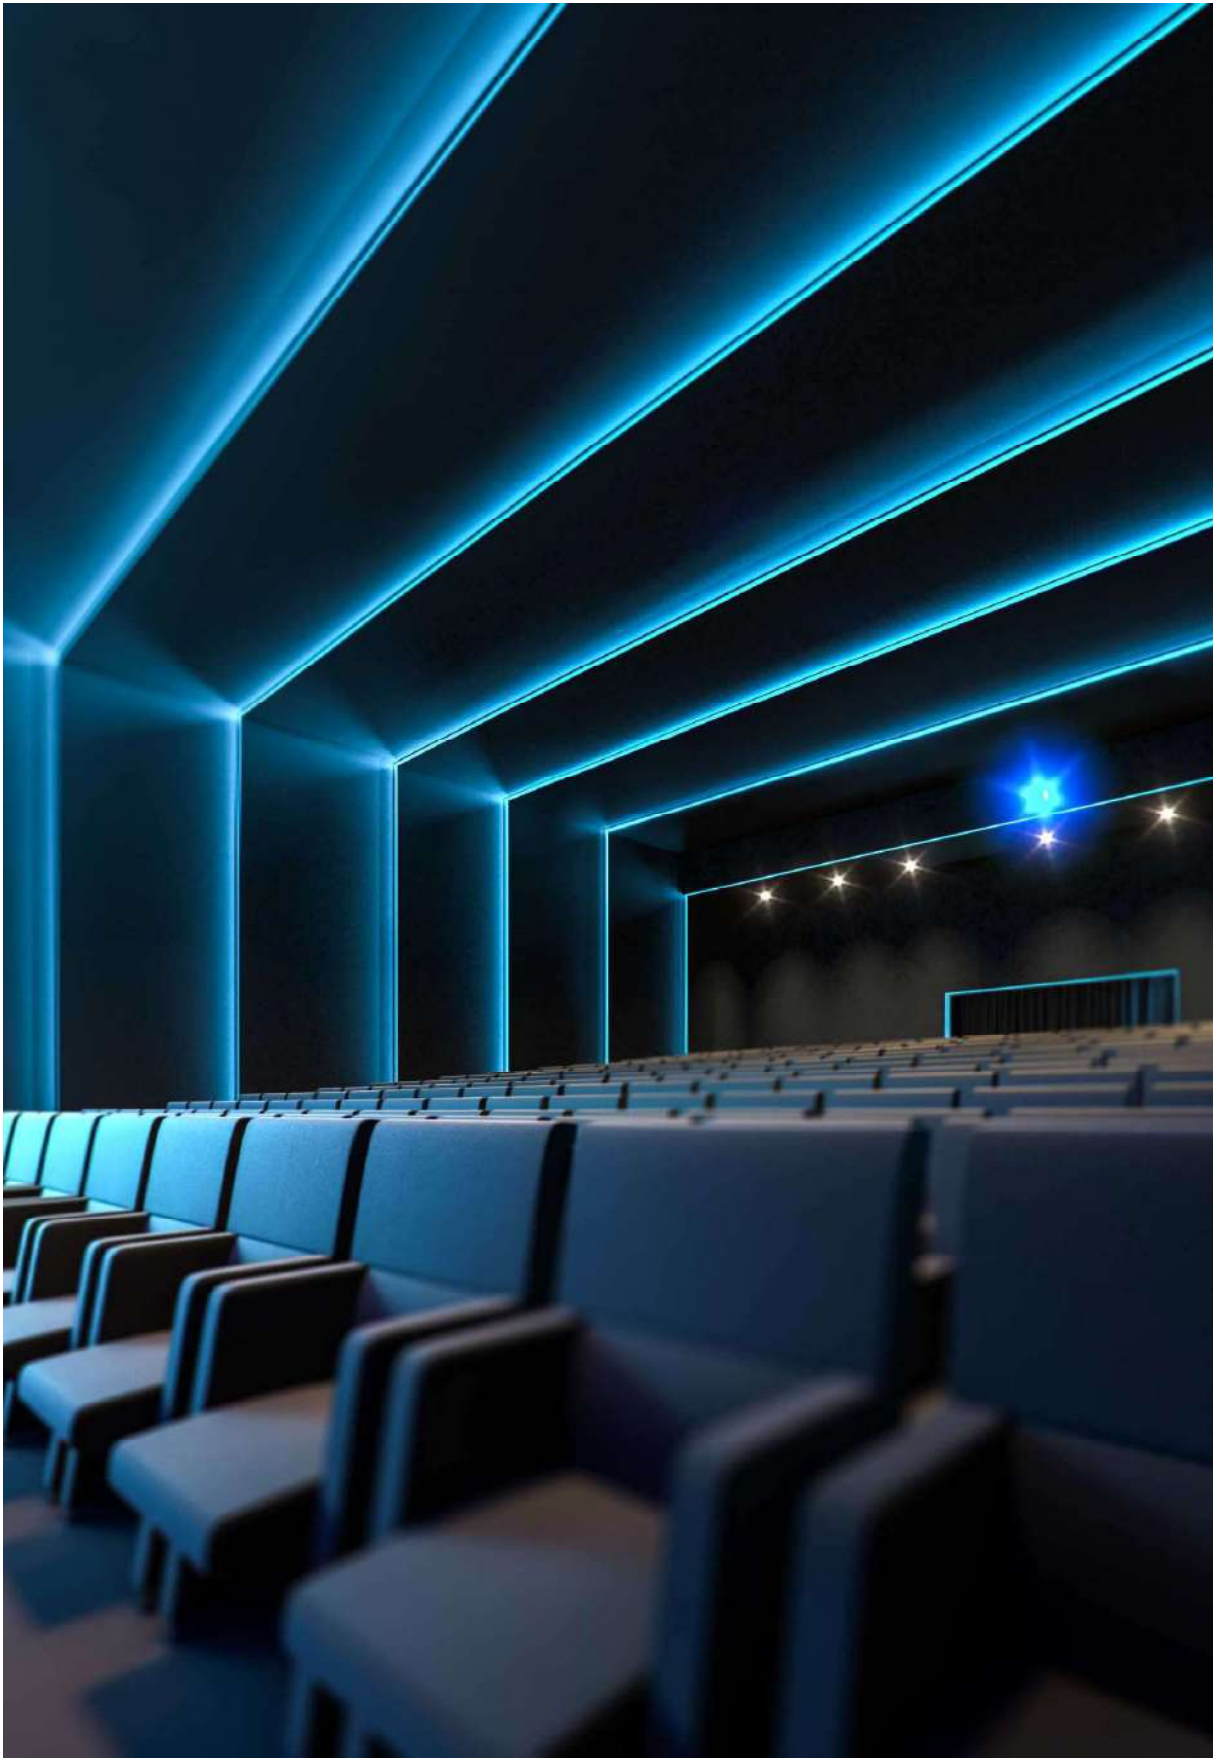

Fine 45

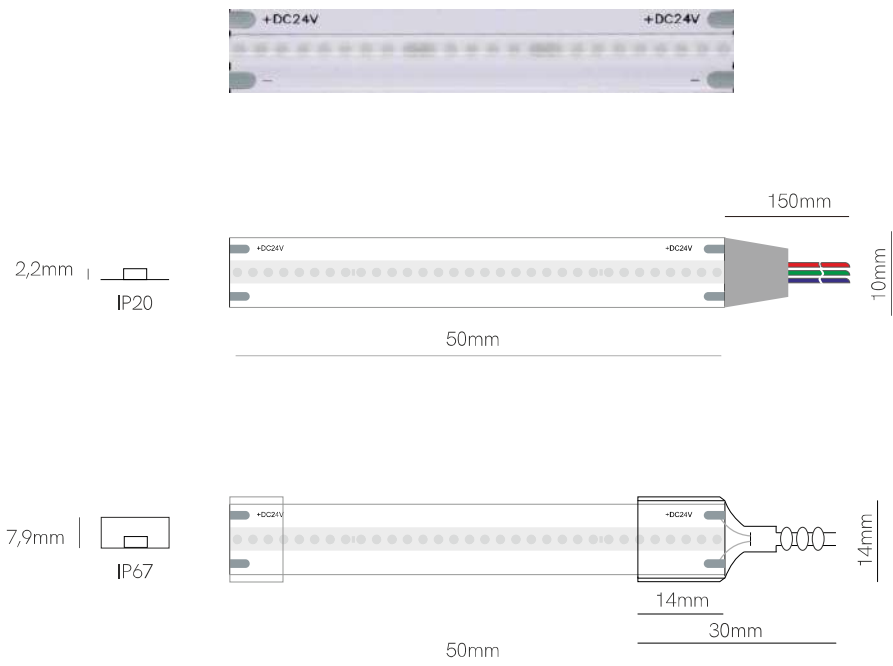

Compatible
profiles p. 294.



Technical Information

V / A / W 24V / 0,41A / 10W/m

	Code	Lumens/w	Lumens/m	CCT	IP
Code	45220	15	150	RED	IP20
	45310	91	910	GREEN	IP20
	45520	13	130	BLUE	IP20
	45227 New	15	150	RED	IP67
	45317 New	91	910	GREEN	IP67
	45527 New	13	130	BLUE	IP67

Accessories



*Available in reel of 10 meters.

Accessories pages 282-293.

5 YEARS WARRANTY | 10 W/m | 480 LED/m | 24 VDC | 50 mm | CSP

Running led strip


► VIDEO



Running is the new digital LED strip that provides a new generation of lighting, simulating the movement of light known as running or chase effect, along the strip. Based on pixel by pixel control, its LEDs turn on and off sequentially, generating a displacement of light that causes a more pleasant and dynamic visual experience in space.



We have 2 controllers, SP6329 RF control with 14 different scenes and speed control, and another controller SP9812 developed by BENEITO & FAURE, standard push button control, with which it is possible to adjust the speed of the scenes, the direction in one direction or another of the light and the intensity. Our system is very versatile, adapting to the size of the installations, it can control up to 1024 pixels.

Running es la nueva tira de LED digital que proporciona una iluminación de nueva generación, simulando el movimiento de la luz conocido como efecto running o chase, a lo largo de la tira. Basado en el control pixel a pixel, sus LEDs se encienden y apagan secuencialmente, generando un desplazamiento de la luz que provoca una experiencia visual más agradable y dinámica en el espacio. Disponemos de 2 controladores, SP6329 control RF con 14 escenas diferentes y control de velocidad, y otro controlador SP9812 desarrollado por BENEITO & FAURE, control por pulsador estándar, con el cual es posible ajustar la velocidad de las escenas, la dirección en un sentido u otro de la luz y la intensidad. Nuestro sistema es muy versátil, adaptándose al tamaño de las instalaciones, puede controlar hasta 1024 pixels.

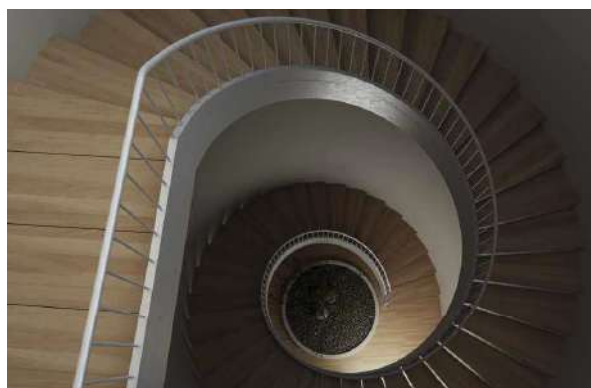


New

Fine running

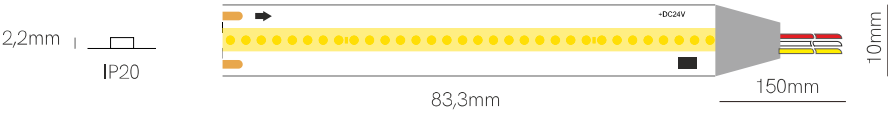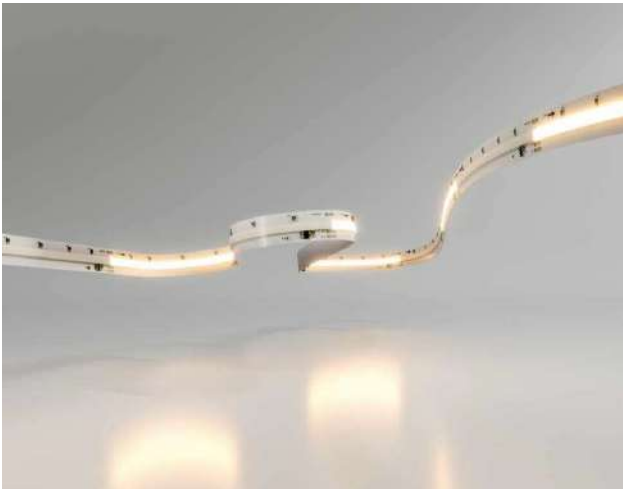

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	WS2811 (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP1300	79 lm/w	950 lm/m	3000K	IP20
	SP1400	87 lm/w	1.050 lm/m	4000K	IP20

Control

Code	Version	Power Max	Pixels Max	VDC IN
SP-9812	Controller	-	-	24 VDC
SP-6329	Running Touch Controller	8A	1.024	24 VDC



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS
WARRANTY

12
W/m

360
LED/m

CRI
≥90

24
VDC



83,3mm

SPI

COB

New

Fine SPI-2

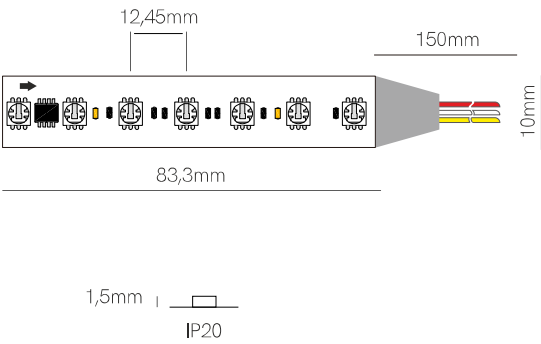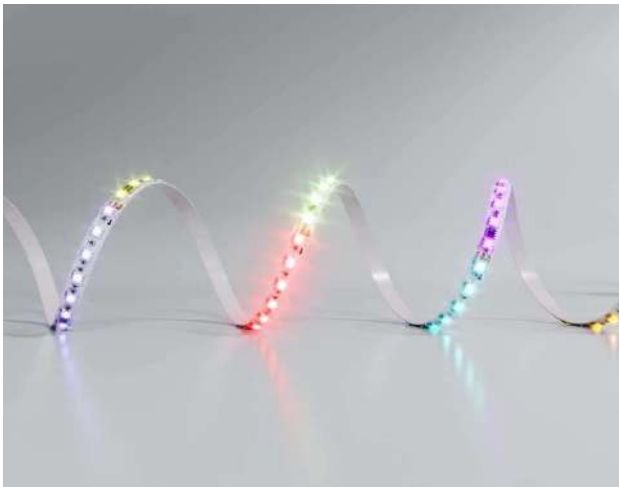

 +   Compatible profiles p. 294.

Technical Information

V / A / W	24V / 0,58A / 14W/m
IC	SM16703PB (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP2430	37 lm/w	515 lm/m	RGB	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY

14 W/m

84 LED/m



24 VDC

83,3mm









New

Fine SPI-3

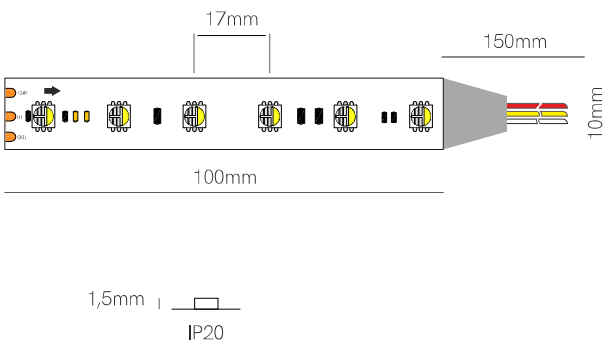

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,45A / 11W/m
IC	SK6812 12MA (10px/m)

Code	Code	Lumens/w	Lumens/m	CCT	IP
SP3470		51 lm/w	561 lm/m	RGB-W 3,000K	IP20



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS
WARRANTY

11
W/m


60
LED/m

24
VDC

100mm



SPI

5050

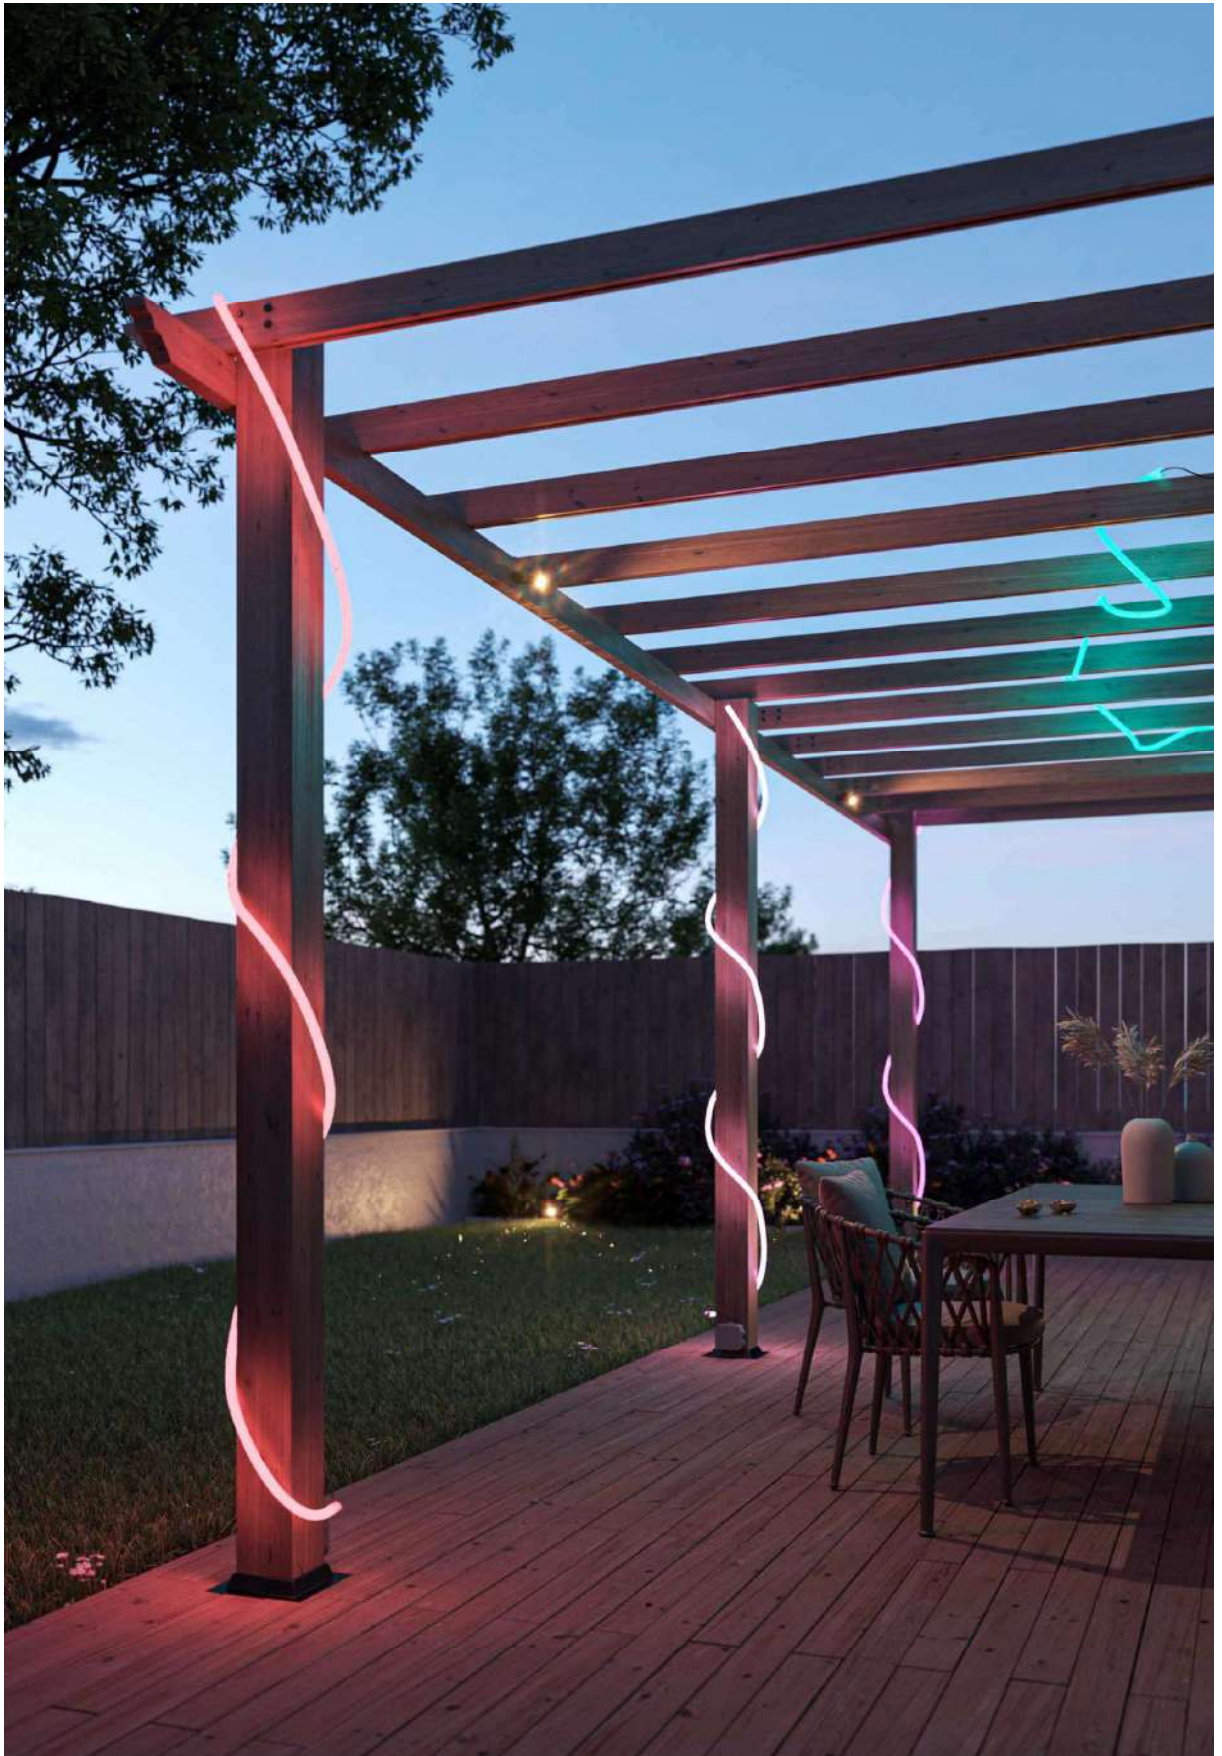

New

Fine SPI-4

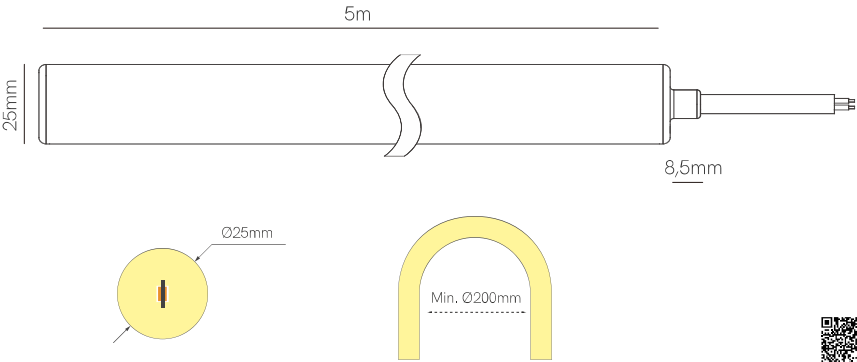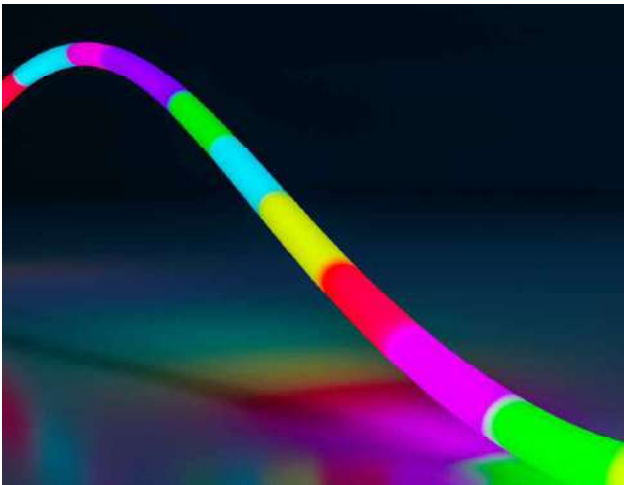

Technical Information

V / A / W	24V / 0,83A / 20W/m
IC	SK6812 12MA (12px/m)

	Code	Lumens/w	Lumens/m	CCT	IP
Code	SP4437	12,5 lm/w	250 lm/m	RGB	IP67

Accessories

								
End Cap ■ 25627	End Cap □ 25657-1 ■ 25657-2 ■ 25657	Initial roof Cap □ 25997-1 ■ 25997-2 ■ 25997	Clip ■ 25530	Initial Cap □ 25667-1 ■ 25667-2 ■ 25667	Initial Cap ■ 25637	Tube ■ 25450	Joint with base □ 25227-1 ■ 25227-2 ■ 25227	Suspension kit ■ 25887



*Available in reel of 5 meters. Accessories pages 282-293.

5 YEARS WARRANTY

20 W/m

168 LED/m

24 VDC



83,3mm

SPI

5050

New

Fine DMX-4

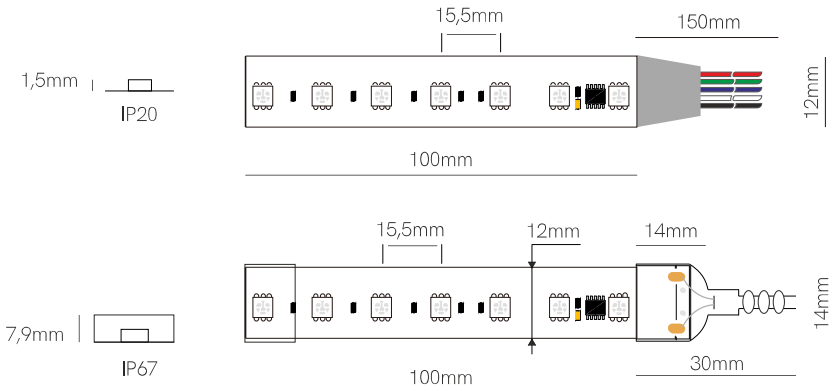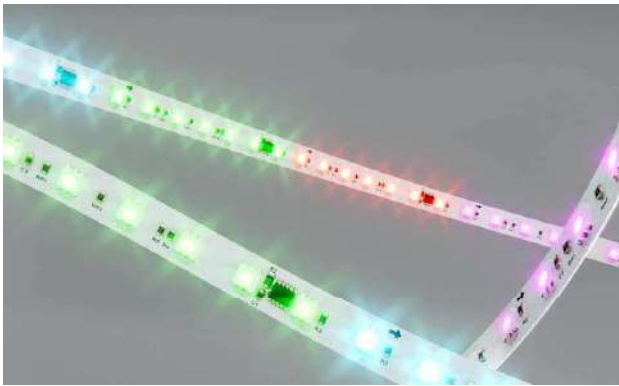

+ Compatible profiles p. 294.

Technical Information

V / A / W	24V / 0,5A / 12W/m
IC	SM18512PS (10px/m)

Code	Lumen/w	Lumen/m	CCT	IP
DM4430	42 lm/w	503 lm/m		IP20
DM4437	42 lm/w	503 lm/m		IP67

Accessories



End Cap
32635



End Cap
32625



*Available in reel of 5 meters.
Accessories pages 282-293.

3 YEARS WARRANTY

12 W/m

70 LED/m

24 VDC


100mm

DMX


5050

New

Fine DMX-5

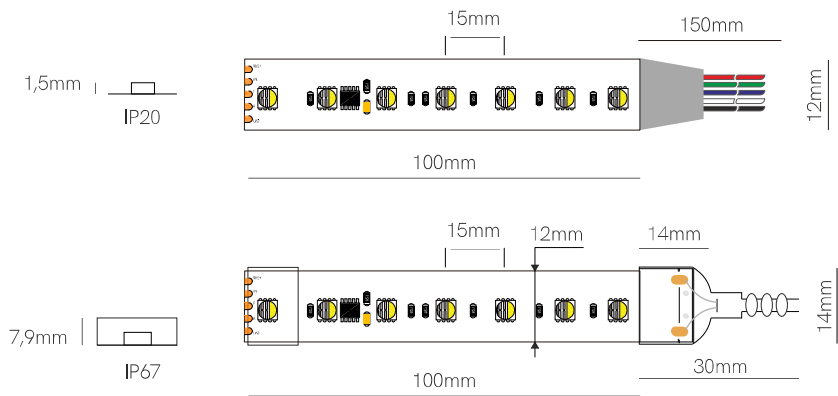

Compatible
profiles p. 294.



Technical Information

V / A / W	24V / 0,7A / 17W/m
IC	SM18512PS (10px/m)

	Code	Lumen/w	Lumen/m	CCT	IP
Code	DM5470	50 lm/w	861 lm/m	RGB-W 3,000K	IP20
	DM5477	50 lm/w	861 lm/m	RGB-W 3,000K	IP67

Accessories



*Available in reel of 5 meters.
Accessories pages 282-293.



NEON^{IP}₆₇

LED Strips

Beneito Faure's 24V flexible neon strips allow you to choose between different light powers, protections, densities and lengths, while maintaining the safety and durability of low voltage installations.

The lighting needs for the nautical industry require a customized and high-performance solution.

All Beneito Faure neon strips have a certificate of resistance to corrosion, resistance to saline alkalis and anti-UV resistance, in addition to an ingress protection of IP67.






Las tiras flexibles neón de Beneito Faure de 24V permiten elegir entre diferentes rendimientos lumínicos, protecciones, densidades y longitudes, manteniendo la seguridad y la vida útil de las instalaciones de baja tensión.

Las necesidades de iluminación para el sector náutico requieren una solución personalizada y de alto rendimiento.

Todas las tiras neón de Beneito Faure tienen el certificado de resistencia a la corrosión, resistencia a los álcalis salinos y resistencia anti UV, además de un índice de protección lumínico de IP67.

Fine 25

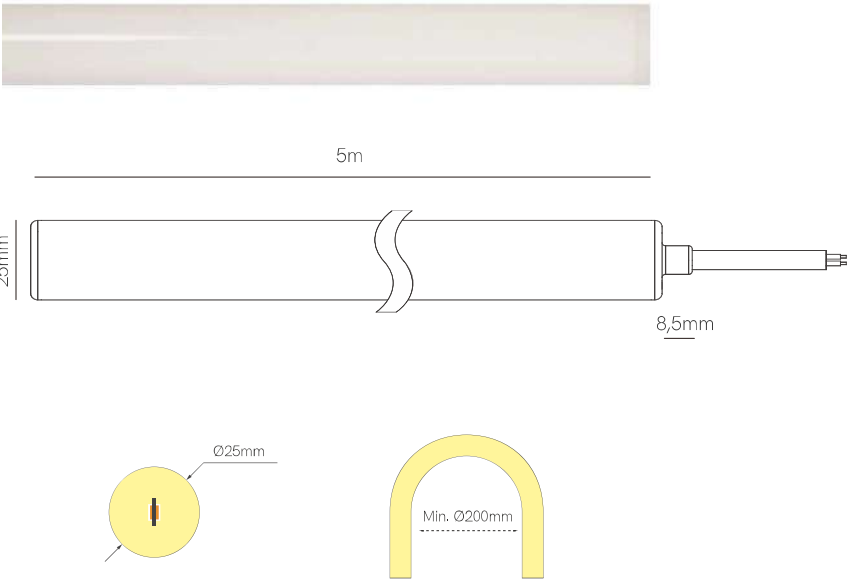

Technical Information

V / A / W	24V / 0,83A / 20W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	25247	60 lm/w	1,200 lm/m	2400K	IP67
	25277	65 lm/w	1,300 lm/m	2700K	IP67
	25307	69 lm/w	1,380 lm/m	3000K	IP67
	25407	73 lm/w	1,460 lm/m	4000K	IP67
	25367	70 lm/w	1,400 lm/m	2700K-6500K	IP67
	25467	41 lm/w	820 lm/m	RGB	IP67

*Available in reels of 1,5m, 3m and 5 meters.

Accessories



End Cap
25627



End Cap
25657-1
25657-2
25657



Initial roof Cap
25997-1
25997-2
25997



Clip
25530



Initial Cap
25667-1
25667-2
25667



Initial Cap
25637



Tube
25450



Joint with base
25227-1
25227-2
25227



Suspension kit
25887



Accessories pages 282-293.

5 YEARS WARRANTY

20 W/m

320 LED/m

480 LED/m (CCT)

240 LED/m (RGB)

24 VDC

10mm / 50mm (CCT-RGB)



 2835

 4040 (RGB)

 CRI ≥90














FITSEVENEVEN®, Club Frankfurt Airport.

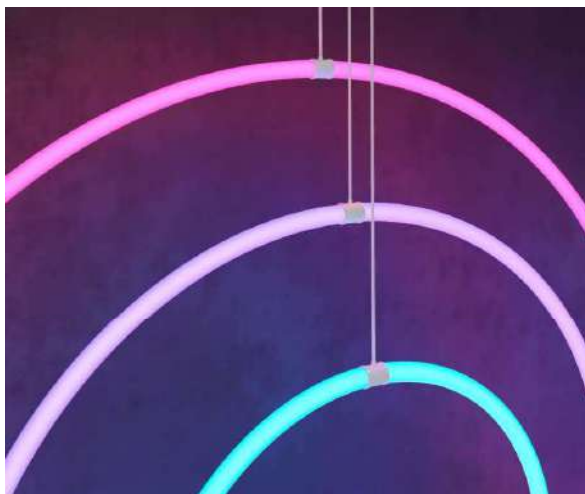

Fine 70

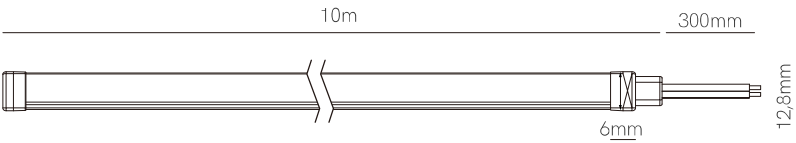

Technical Information

V / A / W	24V / 0,20A / 5W/m
-----------	--------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	70277	31 lm/w	155 lm/m	2700K	IP67
	70307	35 lm/w	175 lm/m	3000K	IP67
	70407	37 lm/w	185 lm/m	4000K	IP67
	70437	15 lm/w	75 lm/m	RGB	IP67

Accessories



*Available in reel of 10 meters.

Accessories pages 282-293.












Fine 72



Technical Information

V / A / W	24V / 0,41A / 10W/m
-----------	---------------------

Code	Code	Lumens/w	Lumens/m	CCT	IP
	72277	59 lm/w	590 lm/m	2700K	IP67
	72307	62 lm/w	620 lm/m	3000K	IP67
	72407	65 lm/w	650 lm/m	4000K	IP67
	72437	26 lm/w	260 lm/m	RGB	IP67

Accessories

End Cap
72967-L2
72967-L4

End Cap
72967-2
72967-4

End Cap
72627-2
72627-4

End Cap
72637

Clip
20,2x16,8x12,5mm
77530

Clip
1000x19,2x17,8mm
77519

Clip
1000x26,4x18mm
77350

Extension cable
77946 (Mono)
77920 (RGB)



*Available in reel of 10 meters. Accessories pages 282-293.

5 YEARS WARRANTY

10 W/m

140 LED/m

96 LED/m (RGB)

24 VDC

50mm / 62,5mm (RGB)


2835

4040 (RGB)

CRI ≥90



Fine 74

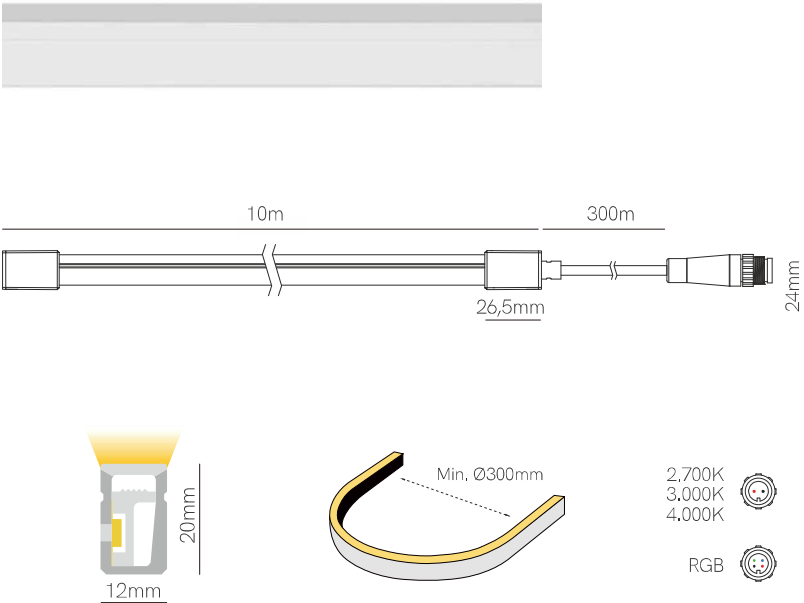

Technical Information

V / A / W	24V / 0,41A / 10W/m
-----------	---------------------

	Code	Lumens/w	Lumens/m	CCT	IP
Code	74277	59 lm/w	590 lm/m	2700K	IP67
	74307	62 lm/w	620 lm/m	3000K	IP67
	74407	65 lm/w	650 lm/m	4000K	IP67
	74437	22 lm/w	220 lm/m	RGB	IP67

Accessories

End Cap

74967-L2

74967-L4

End Cap

74967-2

74967-4

End Cap

74627-2

74627-4

End Cap

74637

Clip

20,2x16,8x12,5mm

77330

Clip

1000x19,2x17,8mm

77119

Clip

1000x26,4x18mm

77350

Extension cable

77946 (Mono)

77920 (RGB)



*Available in reel of 10 meters. Accessories pages 282-293.

5 YEARS WARRANTY

10 W/m

140 LED/m

96 LED/m (RGB)

24 VDC

50mm / 55,5mm (RGB)

2835

4040 (RGB)

CRI ≥90







LED Strips accessories



Control Basic

	Code	Version	Power Max	VDC IN	Size
1.	90990	☐ RF Mono Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
2.	89260	☐ RF CCT Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
3.	88460	☐ RF RGB Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
4.	91430	☐ RF RGB-W Remote Basic	-	5 VDC (3xAAA)	120x46x18mm
5.	86019	☐ Controller Mono/CCT/RGB Basic	3Cx5A	12-24 VDC	145x46x18mm
6.	87029	☐ Controller RGB-W Basic	5Cx5A	12-24 VDC	145x46x18mm

(((•))) RF |



Control Top

	Code	Version	Power Max	VDC IN	Size
1.	81990	☒ RF Mono Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
2.	80260	☒ RF CCT Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
3.	79430	☒ RF RGB-W Remote Top	-	4,5 VDC (3xAAA)	120x55x17mm
4.	77019	☐ Controller Mono/CCT/RGB/RGB-W Top	4Cx5A	12-23 VDC / 5Ax4C	178x46x18mm
5.	82995	☐ RF Mono Button Panel Top	-	24 VDC	86x86x41mm
6.	83475	☒ RF RGB-W Button Panel Top	-	24 VDC	86x86x41mm

(((•))) RF |




3 YEARS
WARRANTY | IP
20



RF Control for Tuya

	Code	Version	Power Max	VDC IN	Size
1.	85890	RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85360	RF CCT	-	3VDC (CD2032)	139x36x11mm
3.	85460	RF RGB	-	3VDC (CR2032)	139x36x11mm
4.	85470	RF RGB-W	-	3VDC (CR2032)	139x36x11mm
5.	85990	New RF RGB+CCT	-	3VDC (CR2032)	139x36x11mm
6.	85894	RF Dimming 4 Zone	-	3VDC (CR2032)	138x50x22mm
7.	85364	New RF CCT 4 Zone	-	4,5 VDC (3xAAA)	120x55x17mm
8.	85475	New RF RGB-W 4 Zone	-	4,5 VDC (3xAAA)	120x55x17mm
9.	85995	New RF RGB+CCT 4 Zone	-	4,5 VDC (3xAAA)	120x55x17mm




Control Tuya

	Code	Version	Power Max	VDC IN	Size
1.	22856	Controller Tuya 5C	5Cx3A	12-24 VDC	114x38x20mm
2.	22821	Controller Push/Tuya 2C	2Cx5A	12-36W	114x38x20mm
3.	22570	New Controller Push/Tuya/RF 5C	5Cx6A	12-48W	179x56x30mm



3 YEARS
WARRANTY | IP
20

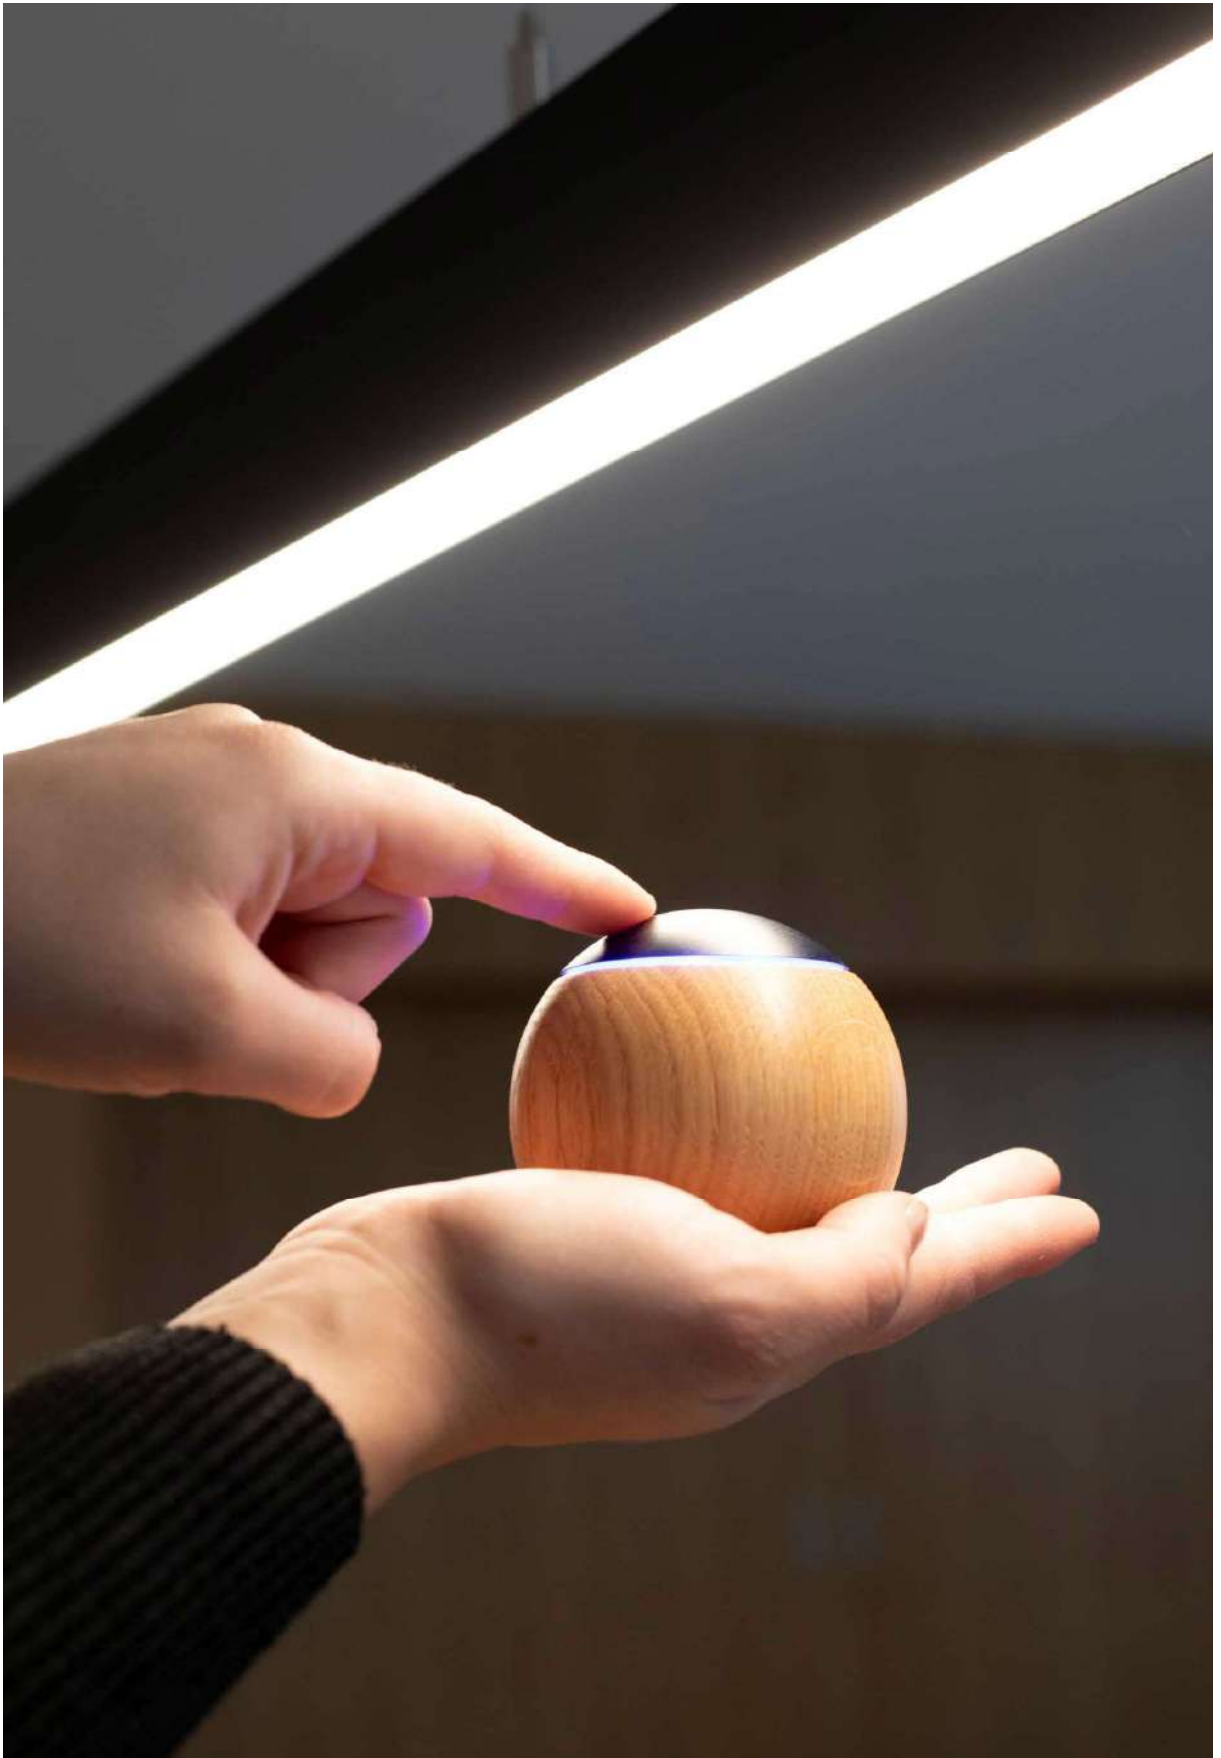



Control Casambi

	Code	Version	Power Max	VDC IN	Size
1.	59682	New Touch Dimmer Casambi 4C Oak/Black	-	-	Ø73x62mm
2.	59689	New Touch Dimmer Casambi 4C Oak/Silver	-	-	Ø73x62mm
3.	59182	New Touch Dimmer Casambi 4C Mahogany/Black	-	-	Ø73x62mm
4.	59189	New Touch Dimmer Casambi 4C Mahogany/Silver	-	-	Ø73x62mm
5.	59112	New Wall touch panel Black	-	-	146x90x24mm
6.	57241	Xpress Casambi White	-	-	90x90x12mm
7.	57242	Xpress Casambi Black	-	-	90x90x12mm
8.	59121	New Wall switch batteryfree 2C White	-	-	81x81x14mm
9.	59122	New Wall switch batteryfree 2C Anthracite	-	-	81x81x14mm
10.	59141	New Wall switch batteryfree 4C White	-	-	81x81x14mm
11.	59142	New Wall switch batteryfree 4C Anthracite	-	-	81x81x14mm



Control Casambi

	Code	Version	Power Max	VDC IN	Size
12.	57924	☐ New Controller input 4 button Casambi	-	230 VAC	45x19x17mm
13.	59629	☐ New Smart Gateway Casambi	-	230 VAC	101x74x29mm
14.	59549	☐ New Led Strips regulator 5C Casambi/Push	5Cx5A	12-48V	186x29x21mm
15.	59519	☐ New Led Strips regulator 1C Casambi/Push	12A	12-48V	44x57x19mm
16.	59733	☐ New Relay Casambi	10A	-	120x50 x32mm
17.	59777	☐ New Triac Dimmable Casambi/Push	-	-	Ø52x15,5mm
18.	59249	☐ Control CBU-PWM4	4Cx1,5A	12-24 VDC	72,6x30x18mm
19.	59739	☐ Relay Casambi	10A	200-240 VAC	35x22x35mm.
20.	59769	☐ Controller End of phase	0,43A	85-240 VAC	40,4x36x2x14mm
21.	59789	☐ Interface 0-10/1-10 Dali	-	220-240 VAC	56,5x35,8x22,3mm
22.	57588	☐ Controller PWM4+Push	4Cx5A	12-24 VDC	88x54x25mm

CASAMBI |



Control PMW / RF

	Code	Version	Power Max	VDC IN	Size
1.	85890	☒ RF Dimming	-	3VDC (CR2032)	139x36x11mm
2.	85894	☒ RF Dimming 4 Zone	-	3VDC (CR2032)	138x50x22mm
3.	22799	☐ New Controller Push/RF Progressive	8A	12-48 VDC	120x43x27mm
4.	22726	☐ Control Push - Dim / RF	8A	5-36 VDC	97x33x18mm

(((•))) RF | **PMW** |



Control SPI New

	Code	Version	Power Max	Pixels Max	VDC IN	Size
1.	92353	SPI 1 Zone RGB/RGB-W Remote	-	-	3VDC (CR2032)	107x58,5x9mm
2.	92473	Controller SPI (RGB/RGB-W)	8A	1,024	5-24 VDC	97x33x18mm
3.	92853	Controller SPI / Tuya (RGB/RGB-W)	8A	1,000	5-24 VDC	114x38x20mm
4.	92553	SPI Signal Repeater	-	-	5-24 VDC	52x52x126mm
5.	92699	Controller SPI / Computer	-	2,048	5-24 VDC	159x89x24mm



Control DMX New

	Code	Version	Power Max	VDC IN	Size
1.	96009	Controller DMX / Triac 2CH	2Cx1A	100-240 VAC	170x50x23mm
2.	93470	RF RGB-W DMX Touch Panel 4 Zone	-	100-240 VAC	86x86x33mm
3.	95153	Amplifier DMX 2CH	-	12-48 VDC	175x45x27mm
4.	93579	Decoder DMX 5152 5CH	5Cx4A	12-48 VDC	175x46x24mm
5.	95479	Decoder DMX 5152 4CH	4Cx5A	12-48 VDC	175x46x24mm
6.	95179	Decoder DMX 5152 1CH	15A	12-24 VDC	170x50x23mm



3 YEARS
WARRANTY | IP
20




Control Push / Triac

	Code	Version	Power Max	VDC IN	Size
1.	85890	RF Dimming	-	3 VDC (CR2032)	139x36x11mm
2.	85894	RF Dimming 4 Zones	-	3 VDC (CR2032)	138x50x22mm
3.	84431	RF Dimming Panel	-	3 VDC (CR2032)	86x86x23mm
4.	22726	Control Push - Dim	8A	5-36 VDC	97x33x18mm
5.	85876	Controller Wifi RF Push Triac Tuya	1,5A	100-240 VAC	52x52x26mm
6.	85884	Controller RF Push Triac	2A	100-240 VAC	110x48x67mm



Control Dali Push Triac

	Code	Version	Power Max	VDC IN	Size
1.	22948	Controller Dali+Push/Triac	1,5A	100-240 VAC	187x46x22mm



Control Dali Push

	Code	Version	Power Max	VDC IN	Size
1.	22490	Controller PWM Dali Push 1-10V	12A	12-24-48 VDC	155x51x26mm
2.	22499	Controller PWM Dali Push 1-10V	5A	12-24-48 VDC	132x22x20mm




3 YEARS WARRANTY | IP 20



Control Driver RF / Push New

	Code	Version	Power Max	VDC IN	Size
1.	22911 ☐	Controller 4CH RF Push	3-45 VDC/ 150-500mA	12-48V	139x36x11mm
2.	22974 ☐	Controller 4CH RF Push	3-45 VDC/350-1,200mA	12-48V	138x50x22mm

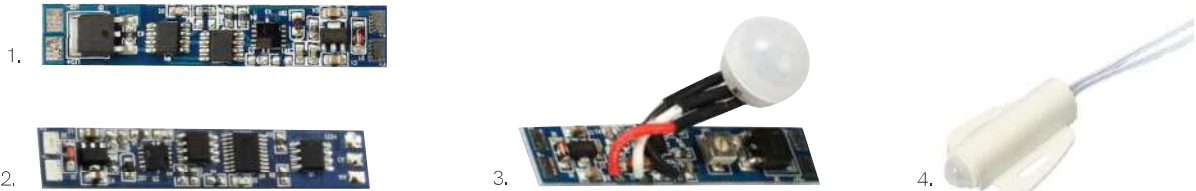

Motion Sensor

	Code	Version	Power Max	VDC IN	Size
1.	85993 ☒	Mini Sensor Mono PWM	6A	12-24 VDC	55x10mm
2.	85263 ☒	Mini Sensor CCT PWM	2Cx4A	12-24 VDC	55x10mm
3.	85183 ☒	Motion Sensor Pir	8A	12-24 VDC	55x10mm
4.	85332 ☐	Motion Sensor Surface Pir	4A	12-24 VDC	45x62mm



Motion Sensor

	Code	Version	Power Max	VDC IN	Size
1.	85220 ☐	Sensor Pir Double Surface hand/door	4A	12-24 VDC	12x12mm
2.	85120 ☐	Sensor Simple Surface door	4A	12-24 VDC	12x12mm
3.	85420 ☐ New	Sensor Simple Surface hand	4A	12-24 VDC	12x12mm
4.	85626 ☐	Sensor Pir Double Recessed hand/door	4A	12-24 VDC	14x18mm
5.	85336 ☐	Sensor Simple Recessed door	4A	12-24 VDC	14x18mm
6.	85330 ☐ New	Sensor Simple Recessed hand	4A	12-24 VDC	14x18mm



3 YEARS
WARRANTY

 |

IP
20

Power Supplies 24V

Power Supplies Standard

Code		Power	IP	VAC IN	VDC OUT	Size
62430	☐	30W	IP20	198-264 VAC	24 VDC	162x42x30mm
62460	☐	60W	IP20	198-264 VAC	24 VDC	187x45x30mm
62475	☐	75W	IP20	198-264 VAC	24 VDC	187x45x30,5mm
62412	☐	120W	IP20	198-264 VAC	24 VDC	268x45x30,5mm
62415	☐	150W	IP20	198-264 VAC	24 VDC	268x45x30,5mm



Power Supplies Basic

Code		Power	IP	VAC IN	VDC OUT	Size
22420	☐	24W	IP67	176-264 VAC	24 VDC	110x40x30mm
22435	☐	40W	IP67	176-264 VAC	24 VDC	148x40x30mm
22460	☐	60W	IP67	176-264 VAC	24 VDC	162,5x42,5x32mm
22410	☐	100W	IP67	176-264 VAC	24 VDC	190x52x33mm



Power Supplies Top

Code		Power	IP	VAC IN	VDC OUT	Size
22415	☐	150W	IP67	90-264 VAC	24 VDC	191x63x37,5mm
22424	☒	240W	IP67	90-305 VAC	24 VDC	244,2x68x38,8mm
22430	☒	300W	IP67	90-305 VAC	24 VDC	246x77x39,5mm
22432	☒	320W	IP67	90-305 VAC	24 VDC	252x90x43,8mm



Power Supplies Slim

Code		Power	IP	VAC IN	VDC OUT	Size
TR3024	☐	30W	IP20	176-264 VAC	24 VDC	261x30x17mm
TR6024	☐	60W	IP20	176-264 VAC	24 VDC	329x30x17mm
TR10024	☐	100W	IP20	176-264 VAC	24 VDC	365x30x18mm
TR16024	☐ New	160W	IP20	198-264 VAC	24 VDC	395x30,8x21,5mm



PF
>0,9

3 YEARS
WARRANTY



Power Supplies Triac

Code		Power	IP	VAC IN	VDC OUT	Size
24609	☐	60W	IP20	200-240 VAC	24 VDC	178x61x24mm
24109	☒	100W	IP66	200-240 VAC	24 VDC	230x70x43mm
24159	☒	150W	IP66	200-240 VAC	24 VDC	256x78x47mm
24309	☒ New	300W	IP66	200-240 VAC	24 VDC	276x78x47mm



Power Supplies Dali-2 / Push New

Code		Power	IP	VAC IN	VDC OUT	Size
64458	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64808	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64158	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm



Power Supplies Dali-2

Code		Power	IP	VAC IN	VDC OUT	Size
24758	☒	90W	IP67	100-305 VAC	24 VDC	180x63x35,5mm
24108	☒	120W	IP67	100-305 VAC	24 VDC	199x63x35,5mm
24208	☒	200W	IP67	100-305 VAC	24 VDC	219x63x35,5mm
24308	☒ New	300W	IP66	110-277 VAC	24 VDC	301x78x25,1mm



Power Supplies Dali-2 DT-8 / Push Dim - CCT New

Code		Power	IP	VAC IN	VDC OUT	Size
64453	☐	45W	IP20	176-264 VAC	24 VDC	187x45x30,5mm
64803	☐	80W	IP20	176-264 VAC	24 VDC	290x45x30,5mm
64153	☐	150W	IP20	176-264 VAC	24 VDC	290x45x30,5mm



PF
>0,9 | 3 YEARS
WARRANTY

Led strips accessories

SMD 10mm Monocolor IP20



Joint
13,8x11,55x3,9mm
■ 20220



Joint
13,55x11,67x4,7mm
■ 20120



Joint
15,4x11,5x5,7mm
■ 20991



Joint
21,6x11,5x5,7mm
■ 20999

SMD 10mm Monocolor IP65



End Cap
■ 20635



End Cap
■ 20625



Joint
24,3x14,6x7,7mm
■ 20225



Joint
24,3x14,6x7,7mm
■ 20125

SMD 10mm Monocolor IP67



End Cap
■ 32635



End Cap
■ 32625

Fine 32 IP65



End Cap
■ 32635



End Cap
■ 32625



Connector kit
■ 32699



Join 180°
■ 32899



Join 90°
■ 32499



Clip
■ 32900



Joint
■ 32299

COB 10mm Monocolor IP20



Joint
■ 31709



Joint
■ 31809



Joint
■ 31909

COB 10mm Monocolor IP67



End Cap
■ 32635



End Cap
■ 32625

SMD 10mm CCT IP20



Joint
13,8x11,55x3,9mm
■ 20230



Joint
13,55x11,67x4,7mm
■ 20130

SMD 10mm CCT IP65



End Cap
20635



End Cap
20625



Joint
24,3x14,6x7,7mm
20235



Joint
24,3x14,6x7,7mm
20135

SMD 10mm RGB IP20



Joint
13,54x11,7x4,1mm
20240



Joint
13,56x13,46x4,7mm
20140

SMD 10mm RGB IP65



End Cap
20635



End Cap
20625



Joint
24,3x14,6x7,68mm
20245



Joint
24,3x14,6x7,68mm
20145

SMD 12mm RGBW IP20



Joint
13,5x13,73x4,2mm
20150



Joint
13,5x13,55x4,8mm
20250

COB 12mm RGBW IP20



Joint
20066



Joint
20266

SMD 4mm Monocolor IP20



Joint
20049



Joint
20249

Single-wire connections



20917



20915

Bipolar connections



20927



20925

[illegible]

Recommended Wiring


FINE	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 31	0,35 mm	—	—	—	—
FINE 32N	0,5 mm	0,5 mm	0,5 mm	0,5 mm	0,5 mm
FINE 36	0,5 mm	0,5 mm	—	—	—
FINE 41	0,5 mm	0,75 mm	0,75 mm	—	—
FINE 42	0,35 mm	0,5 mm	—	—	—
FINE 43	0,35 mm	—	—	—	—
FINE 44	0,5 mm	0,75 mm	—	—	—
FINE 45	0,35 mm	0,5 mm	0,75 mm	—	—
FINE 46	0,5 mm	0,75 mm	0,75 mm	—	—
FINE 47	0,35 mm	—	—	—	—
FINE 48	0,35 mm	0,5 mm	—	—	—
FINE 49	0,35 mm	—	—	—	—
FINE 50	0,35 mm	—	—	—	—
FINE 51	0,5 mm	0,75 mm	1 mm	—	—
FINE 52	0,5 mm	—	—	—	—
FINE 54	0,35 mm	—	—	—	—
FINE 55	0,35 mm	0,5 mm	—	—	—
FINE 56	0,35 mm	0,5 mm	—	—	—
FINE 61	0,35 mm	—	—	—	—
FINE 63	0,5 mm	0,75 mm	—	—	—
FINE 64	0,5 mm	0,75 mm	—	—	—
FINE 66	0,5 mm	—	—	—	—
FINE 69	0,2 mm	0,2 mm	—	—	—
FINE 71	0,5 mm	—	—	—	—
FINE 76	0,35 mm	0,5 mm	0,75 mm	—	—
FINE 84	0,35 mm	0,35 mm	0,5 mm	0,75 mm	1 mm
FINE 96	0,35 mm	0,5 mm	—	—	—

*Cable section.

Light Perception


	Open Circuit					Back Feed				
FINE	5 mts	10 mts	15 mts	20 mts	25 mts	5 mts	10 mts	15 mts	20 mts	25 mts
FINE 31	95%	—	—	—	—	95%	95%	—	—	—
FINE 32N	100%	100%	90%	90%	80%	—	—	—	—	—
FINE 36	90%	66%	—	—	—	95%	90%	76%	—	—
FINE 41	94%	72%	55%	—	—	96%	94%	79%	72%	—
FINE 42	98%	78%	—	—	—	100%	93%	—	—	—
FINE 43	100%	—	—	—	—	100%	—	—	—	—
FINE 44	94%	72%	—	—	—	98%	94%	—	—	—
FINE 45	95%	75%	55%	—	—	96%	94%	85%	—	—
FINE 46	94%	72%	55%	—	—	96%	94%	79%	72%	—
FINE 47	100%	—	—	—	—	100%	—	—	—	—
FINE 48	98%	96%	—	—	—	100%	99%	98%	97%	96%
FINE 49	90%	—	—	—	—	100%	—	—	—	—
FINE 50	95%	—	—	—	—	100%	—	—	—	—
FINE 51	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 52	100%	—	—	—	—	100%	100%	—	—	—
FINE 54	98%	—	—	—	—	100%	90%	—	—	—
FINE 55	94%	72%	—	—	—	98%	94%	—	—	—
FINE 56	98%	80%	—	—	—	100%	95%	—	—	—
FINE 61	100%	—	—	—	—	100%	100%	—	—	—
FINE 63	92%	65%	—	—	—	96%	92%	70%	65%	—
FINE 64	98%	96%	—	—	—	100%	98%	96%	94%	92%
FINE 66	98%	—	—	—	—	100%	—	—	—	—
FINE 69	98%	73%	—	—	—	100%	88%	70%	63%	—
FINE 71	95%	—	—	—	—	100%	—	—	—	—
FINE 76	100%	80%	70%	—	—	100%	95%	90%	—	—
FINE 84	100%	100%	90%	90%	80%	100%	100%	100%	95%	95%
FINE 96	100%	80%	—	—	—	100%	95%	—	—	—

*Efficiency (%).

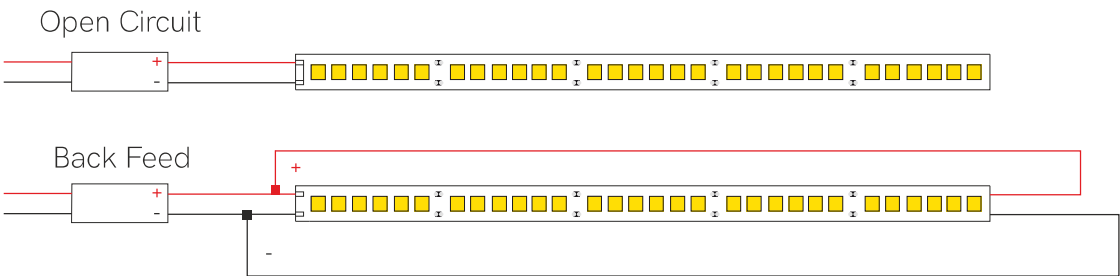




Technical lighting

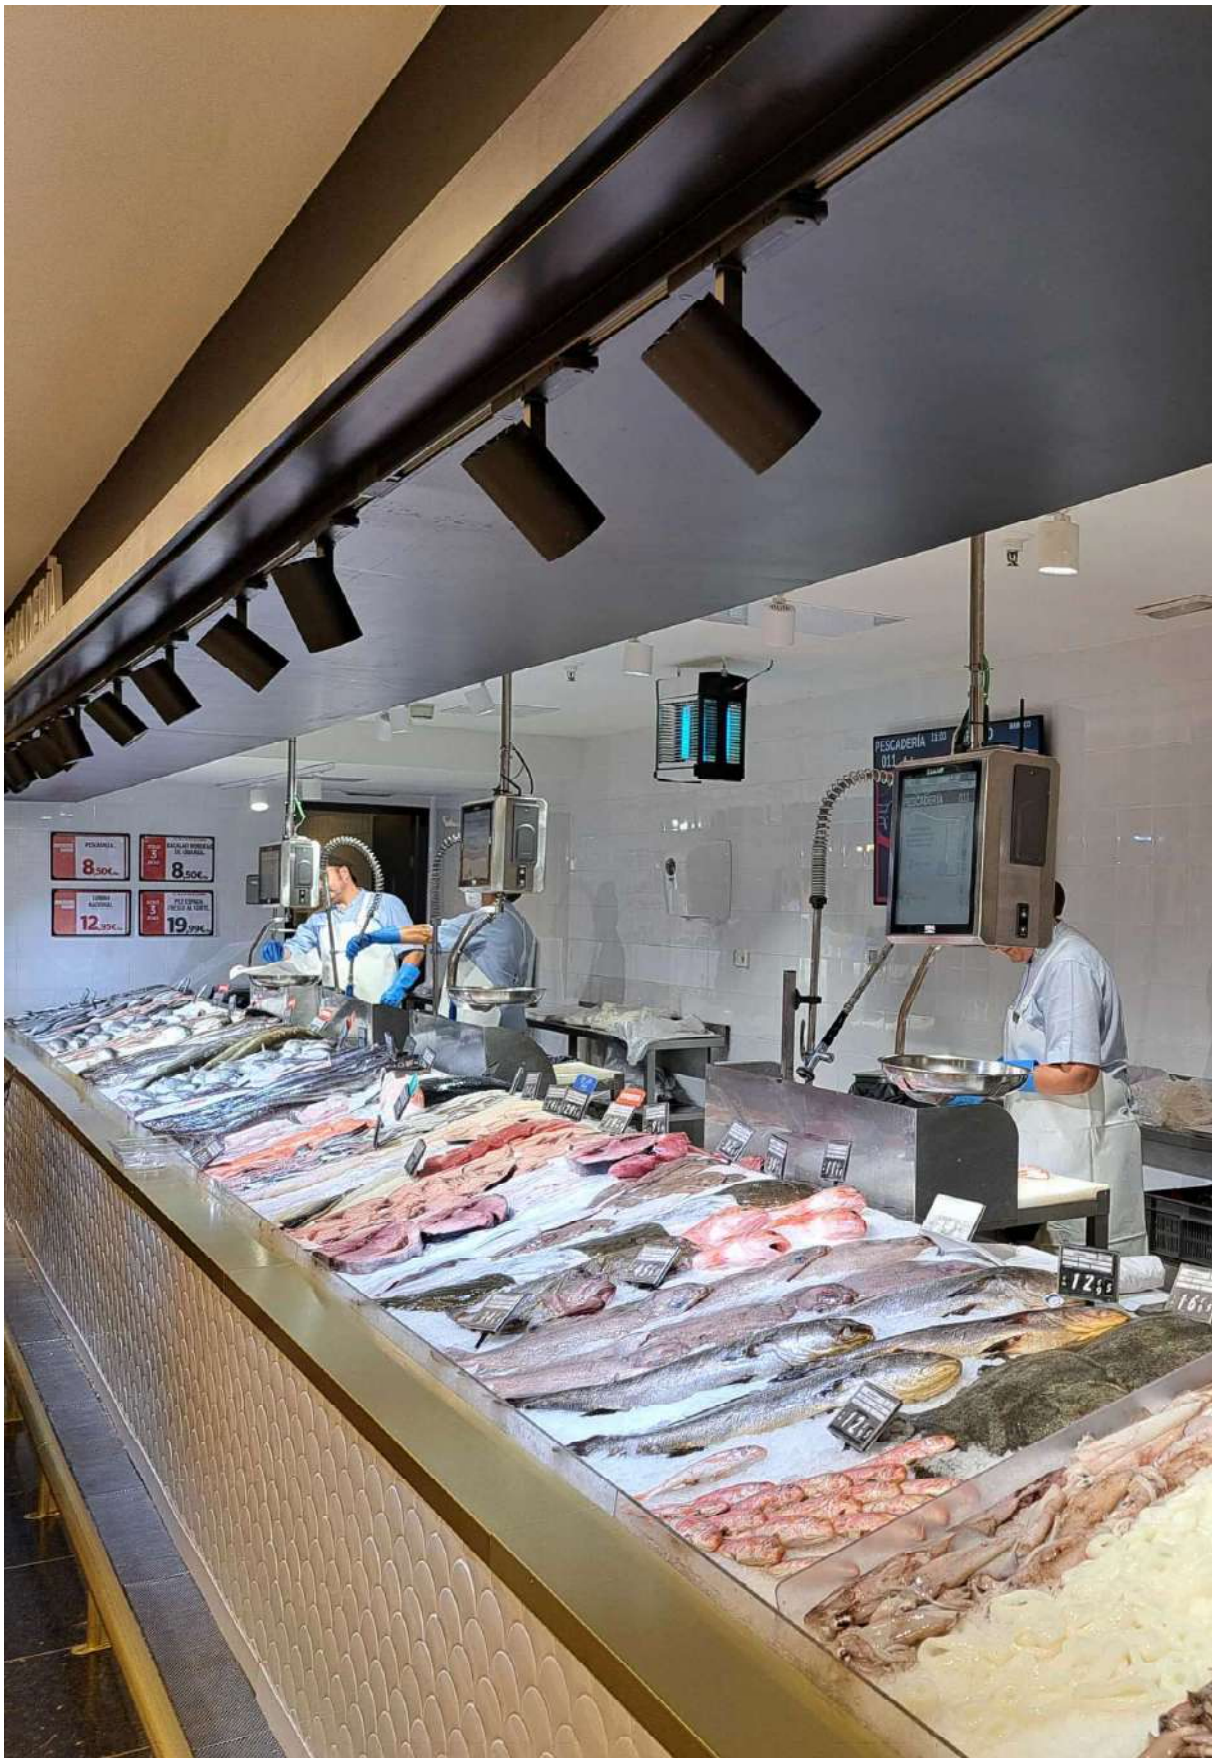

New

Lonja



Technical Information

Power	22W
Lumens	1,628 lm - 2,662 lm
Installation	Three Phase Track
Material	Aluminium
Finishes	White (9003) / Black (9005)


Code	Diffuser (Angle)	Size	CCT (Lm)	Driver	Colour
Code 3	Transparent (15°) 1	9	FISH - 5,500K 2,662 lm 1	On/Off 1	White 1
	Transparent (24°) 6		3,000K 2,100 lm 3	Triac 4	Black 2
	Transparent (36°) 8		4,000K 2,206 lm 4		Custom RAL
			MEAT R - 1,950K 1,650 lm 5		
			FRUIT - 2,700K 2,310 lm 6		
			WINE/CHEESE - 2,700K 2,464 lm 7		
			BREAD - 2,400K 2,464 lm 8		
			MEAT M - 3,500K 1,628 lm 9		

Code: 3 9

*Create your code according to your preferences.

Consult delivery terms and conditions.

Accessories



Honeycomb anti-glare
40111



5 YEARS WARRANTY

50,000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥90

3,000K 4,000K

15° 24° 36°

50/60 Hz

TRIAC DIMM

+40°C -15°C





1



Benetton Faure, La Roca del Valles (Spain).

Sono 40W

Sono 60W



*Need Tuya Smart App to work.



Technical Information

Power	40W	60W
Installation	Three Phase Track	Three Phase Track
Color Temperature	Tuya 2,600K - 4,000K	Tuya 2,600K - 4,000K
Lumens	3,130 lm	4,390 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	☐ 4946 ☒ 4947 Custom RAL	☐ 4950 ☒ 4951 Custom RAL

Consult delivery terms and conditions.

Accessories



Gateway Wifi 4956 ☐



*See page 8 for Gateway additional info.

3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥98

30°

50/60 Hz

IK06


+45°C
-15°C



Zoom




Power and CTT switch



Technical Information

Power	Switch 15W / 20W / 25W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	15W: 1.200 lm / 20W: 1.500lm / 25W: 1.800 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	☐ 4900 ☒ 4901 Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥90

15° - 55°

50/60 Hz

IK06

+45°C -20°C

CCT SWITCH

POWER SWITCH

1/10








New

Crown track



Crown base

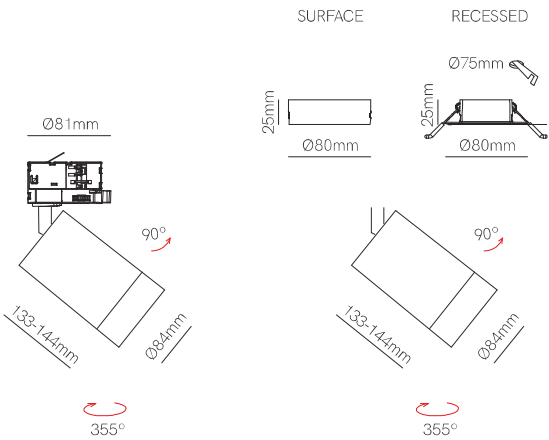

Technical Information

Power	25W	25W
Installation	Three Phase Track	Surface / Recessed
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	1,625 lm	1,625 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	☐ 5221 ☒ 5222	☐ 5224 ☒ 5225




Base version includes surface and recessed base (not mounted).





Lena




Technical Information

Power	35W
Installation	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	4,200 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 4449-V2 ☐ 4450-V2 ☒ Custom RAL




Consult delivery terms and conditions.






Optica Rapp , La Laguna, Tenerife (Spain). Design: Grupo Globard. Photography: Kuo estudio.

Aston



Technical Information

Power	20W
Installation	Three Phase Track
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	2,400 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 4439 ☒ 4440 ☐ Custom RAL



Consult delivery terms and conditions.

3 YEARS
WARRANTY

30,000
HOURS

 → 

IP
20

220/240
VAC

UGR
<19

PF
>0,9

CRI
≥80



15°
38°
60°



50/60
Hz


 +40°C
-15°C

 CCT
SWITCH

 1/8



Konic dimmable



Technical Information


Power	30W
Installation	Three Phase Track
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	2,440 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 4985 ☒ 4986  Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS



IP 20

220/240 VAC

UGR <19

PF >0,9

 CRI ≥94

 15° 38° 60°

50/60 Hz

 TRIAC DIMM

 +40°C -15°C

 CCT SWITCH

 1/8






Kom 20W



Kom 30W



Kom 40W



Technical Information

Power	20W	30W	40W
Installation	Three Phase Track	Three Phase Track	Three Phase Track
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	2,300 lm	2,470 lm	4,500 lm / 4,600 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 4337 ☒ 4339 ☒ Custom RAL	☐ 4336-N ☒ 4338-N ☒ Custom RAL	☐ 3.000K 4444 ☐ 4.000K 4445 ☒ 3.000K 4447 ☒ 4.000K 4448 ☒ Custom RAL

CRI ≥80 | CCT SWITCH

CRI ≥94 | CCT SWITCH


CRI ≥80



Consult delivery terms and conditions.

3 YEARS WARRANTY | 30,000 HOURS | | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | | 15° / 24° / 40° | 50/60 Hz | +50°C / -20°C | AKZO NOBEL |



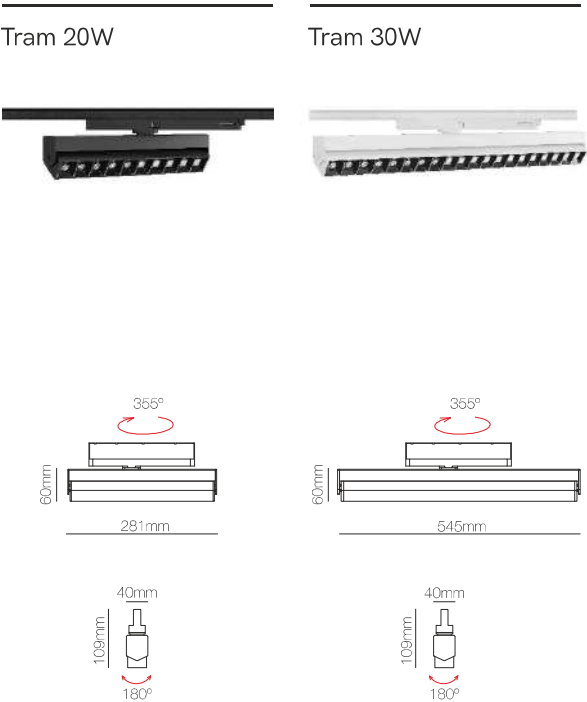

Technical Information

Power	20W	30W
Installation	Three Phase Track	Three Phase Track
Color Temperature	3,000K / 4,000K	3,000K / 4,000K
Lumens	2,320 lm / 2,400 lm	3,520 lm / 3,600 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3,000K 4427 ☐ 4,000K 4428 ☒ 3,000K 4429 ☒ 4,000K 4430	☐ 3,000K 4541 ☐ 4,000K 4542 ☒ 3,000K 4543 ☒ 4,000K 4544

5 YEARS
WARRANTY

3 YEARS
WARRANTY



30,000 HOURS

IP 20

220/240 VAC

UGR <19


PF >0,9

CRI ≥80

50/60 Hz



Alfa



Technical Information

Power	32W
Installation	Three Phase Track
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	3.100 lm / 3.200 lm / 3.250 lm
Material	Aluminium
Finishes	White / Black

Code	☐	2.700K	4038
	☐	3.000K	4039
	☐	4.000K	4040
	☒	2.700K	4176
	☒	3.000K	4177
	☒	4.000K	4178



5 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥80

45°

50/60 Hz

+40°C
-10°C

AKZO NOBEL



1/10



Piccolo track




Piccolo base



Technical Information


Power	9,5W	9,5W
Installation	Three Phase Track	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.300 lm	1.300 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4437 ☐ 4438  Custom RAL	☐ 4833 ☐ 4834  Custom RAL




 Consult delivery terms and conditions.
*Surface and recessed base included with Piccolo base.

3 YEARS WARRANTY | 30,000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 |  15° 38° 60° | 50/60 Hz |  +50°C -20°C | CCT SWITCH | AKZO NOBEL |  1/20

Piccolo GU10 track V3



Piccolo GU10 base



Technical Information

Installation	Three Phase Track	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3990-V3 ☒ 3989-V3 Custom RAL	☐ 4050 ☒ 4049 Custom RAL
	3 YEARS WARRANTY 1/20	5 YEARS WARRANTY 1/40

Consult delivery terms and conditions.

Accessories



Recessed base
4835 ☐ 4836 ☒



*GU10 bulbholder included.



IP 20 | 220/240 VAC | AKZO NOBEL



Piccolo AR111 track



Piccolo AR111 base



Technical Information


Installation	Three Phase Track	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White	White
Code	☐ 4435 ☒ Custom RAL	☐ 4433 ☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Recessed base
4835 ☐



*GU10 bulbholder included.


5 YEARS WARRANTY | IP 20 | 220/240 VAC | AKZO NOBEL | 1/40





New

Cookie three phase track



Technical Information

Power	12W
Installation	Threee Phase Track
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5179 ☒ 5180



3 YEARS WARRANTY

30.000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥90

38°

50/60 Hz



TRIAC DIMM

+40°C
-20°C

CCT SWITCH

1/20

Three phase track surface accessories

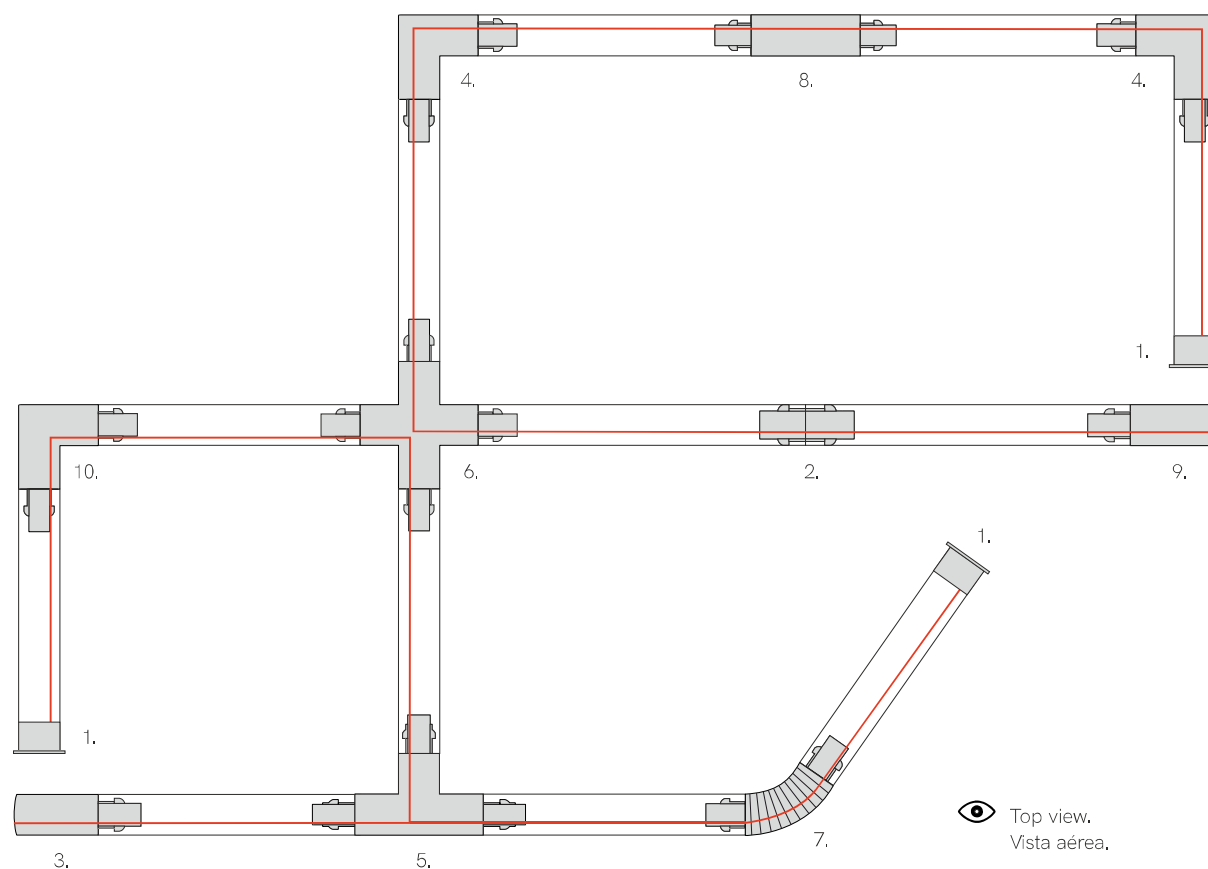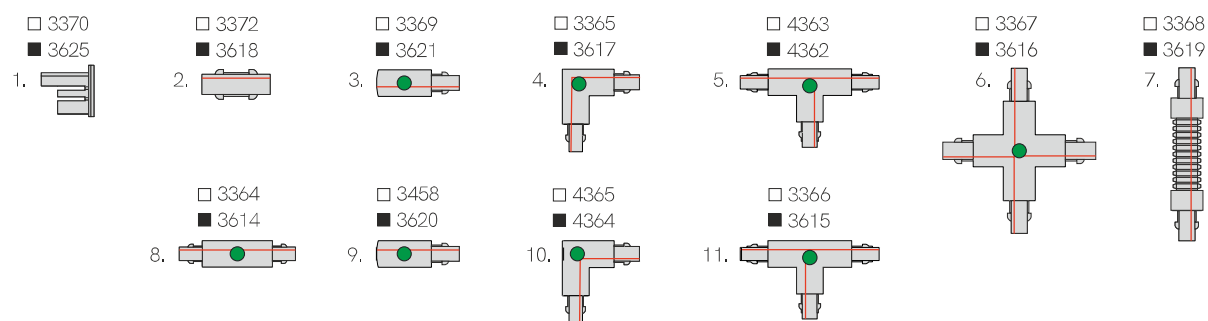

● Allows power input



*End cap and power supply included

Three phase track surface

W: 32mm H: 31mm

- ☐ 1m 3795
- ☐ 2m 3796
- ☐ 3m 3797
- ☒ 1m D-3626
- ☒ 2m D-3627
- ☒ 3m D-3628



Track ceiling surface

L: 30mm W: 25mm H: 12mm

- ☐ 3373
- ☒ 3623



Track power supply surface

L: 98mm W: 32mm H: 32mm

- ☐ Left 3369
- ☐ Right 3458
- ☒ Left 3621
- ☒ Right 3620



Joint track without spacing

L: 68mm W: 25mm H: 27mm

- ☐ 3372
- ☒ 3618



Joint track with spacing surface

L: 166mm W: 35mm H: 32mm

- ☐ 3364
- ☒ 3614



L Joint track surface

L: 100mm W: 66mm H: 32mm

- ☐ Left 4365
- ☐ Right 3365
- ☒ Left 4364
- ☒ Right 3617



T Joint track surface

L: 166mm W: 100mm H: 32mm

- ☐ Left 4363
- ☐ Right 3366
- ☒ Left 4362
- ☒ Right 3615



X Joint track surface

L: 166mm W: 166mm H: 32mm

- ☐ 3367
- ☒ 3616



Flexible joint track

L: 245mm W: 35mm H: 32mm

- ☐ 3368
- ☒ 3619



End cap

L: 32mm W: 32mm H: 32mm

- ☐ 3370
- ☒ 3625



Three phase adapter

L: 70mm W: 40mm H: 41mm

- ☐ 3371-V2
- ☒ 3624-V2



Suspension kit

L: 3.000mm W: Ø35 | Ø2,4 H: 47mm

- ☐ 3459
- ☒ 3622





Three phase surface base

L: Ø100mm H: 32mm

- ☐ 4700
- ☒ 4701



Three phase track recessed accessories

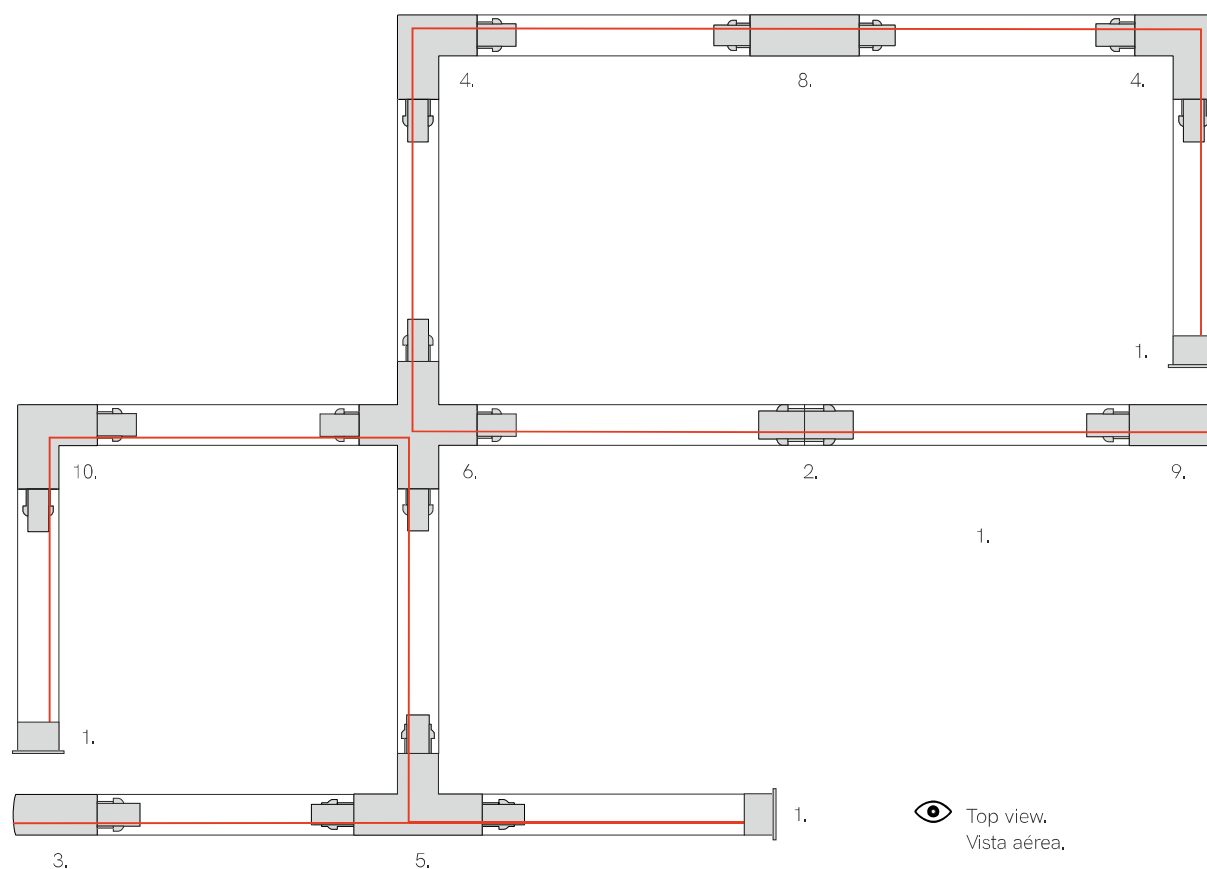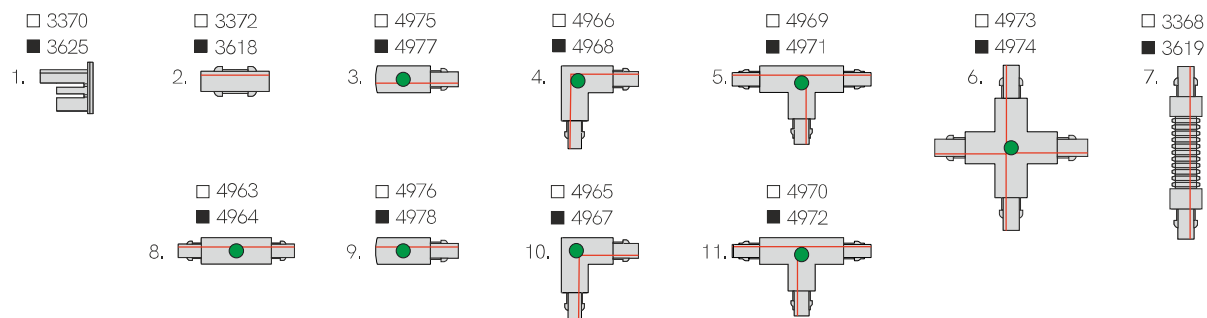

● Allows power input



*End cap and power supply included

Three phase track recessed

W: 56mm H: 33mm

☐ 2m 3897

☐ 3m 3898

☒ 2m 4753

☒ 3m 4754



Track ceiling recessed

L: 64mm W: 25mm H: 32mm

☒ 3805



Track power supply recessed

L: 98mm W: 56,5mm H: 33,7mm

☐ Left 4975

☐ Right 4976

☒ Left 4977

☒ Right 4978



Joint track without spacing

L: 68mm W: 25mm H: 27mm

☐ 3372

☒ 3618



Joint track with spacing recessed

L: 166mm W: 56,5mm H: 33,7mm

☐ 4963

☒ 4964



Flexible joint track

L: 245mm W: 35mm H: 32mm

☐ 3368

☒ 3619



L Joint track recessed

L: 111mm W: 111mm H: 33,7mm

☐ Left 4965

☐ Right 4966

☒ Left 4967

☒ Right 4968



T Joint track recessed

L: 166mm W: 111mm H: 33,7mm

☐ Left 4969

☐ Right 4970

☒ Left 4971

☒ Right 4972



X Joint track recessed

L: 166mm W: 166mm H: 33,7mm

☐ 4973

☒ 4974



End cap

L: 32mm W: 32mm H: 32mm

☐ 3370

☒ 3625



Three phase adapter

L: 70mm W: 40mm H: 41mm

☐ 3371-V2

☒ 3624-V2



Three phase recessed base

L: Ø130mm H: 60mm  Ø110mm

☐ 3851


☒ 3852

*Need Three Phase Surface Base (4700 or 4701) to put inside.





Nox



Technical Information

Power	30W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.460 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 4241-N
	☒ 4242-N
	Custom RAL

Consult delivery terms and conditions.

Accessories



Included with:
4241-N



Included with:
4241-N / 4242-N



3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,9

CRI ≥94

15°
24°
40°

50/60 Hz


+50°C
-20°C

CCT SWITCH

1/8



Bonn

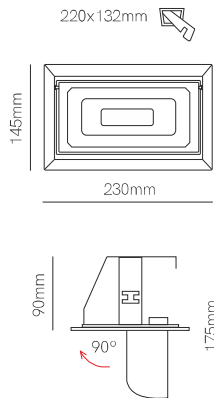

Technical Information

Power	40W
Installation	Recessed
Color Temperature	3,000K / 4,100K
Lumens	4,750 lm / 4,800 lm
Material	Aluminium
Finishes	White / Gray
Code	☐ 3,000K4097 ☐ 4,100K4096

☒☒☒

Consult delivery terms and conditions.

5 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥80

100°


50/60 Hz

+40°C
-20°C


1/12



Tram recessed 2



Tram recessed 5

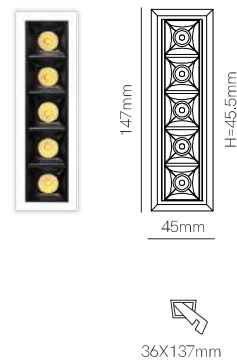

*Need Tuya Smart App to work.



Technical Information

Power	6W	10W
Installation	Recessed	Recessed
Color Temperature	Tuya 2.700K - 6.000K	Tuya 2.700K - 6.000K
Lumens	220 lm	500 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4731 ☒ 4732	☐ 4733 ☒ 4734


Accessories




*See page 8 for Gateway additional info.



Tram recessed 10

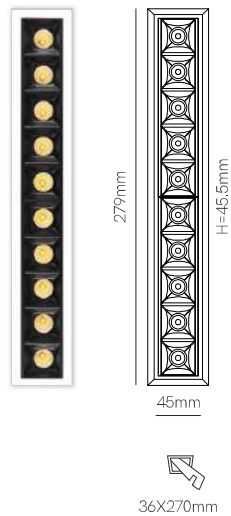

Tram recessed 15

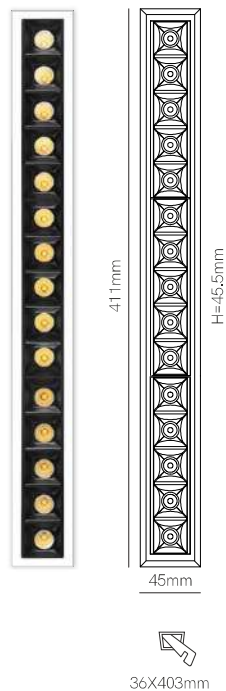

*Need Tuya Smart App to work.

Technical Information

Power	20W	30W
Installation	Recessed	Recessed
Color Temperature	Tuya 2,700K - 6,000K	Tuya 2,700K -6,000K
Lumens	1,000 lm	1,500 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4735 ☒ 4736	☐ 4737 ☒ 4738

1/20

1/20

Accessories



*See page 8 for Gateway additional info.

3 YEARS
WARRANTY

30,000
HOURS

IP
20

220/240
VAC

UGR
<14

PF
>0,9

CRI
≥90

30°

50/60
Hz


IK06

+40°C
-10°C





Tao



Technical Information

Power	10W
Installation	Recessed
Color Temperature	3,000K / 4,000K
Lumens	925 lm / 1,000 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3,000K 3942
	☐ 4,000K 3943
	☒ 3,000K 3944
	☒ 4,000K 3945
	☒ Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

50,000 HOURS

IP 32

220/240 VAC

UGR <19

PF >0,9

CRI ≥80

38°


50/60 Hz

+40°C / -20°C


1/40



Pulcom round




Pulcom square



Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	800 lm	800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	☐ 4742 ☐ 4746 Custom RAL	☐ 4744 ☐ 4748 Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

25.000
HOURS

IP
44

220/240
VAC

UGR
<19

PF
>0,9

CRI
≥80

38°

50/60
Hz

IK06



+40°C
-20°C

CCT
SWITCH

1/5/20

Pulcom round asymmetric

Pulcom square asymmetric



Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	800 lm	800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	☐ 4743 ☒ 4747	☐ 4745 ☒ 4749
	 Custom RAL	 Custom RAL

☒ Custom RAL

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 44

220/240 VAC

UGR <19

PF >0,9

CRI ≥80

38°

50/60 Hz

IK06


+40°C
-20°C

CCT SWITCH

1/5/20



Pulcom led




Pulcom trim




Round trim

Ø75mm



Square trim

87X87mm




Pulcom asymmetric trim




Asymmetric round trim

Ø75mm



Asymmetric square trim

87X87mm



Technical Information

Power	8W	-	-
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2,700K / 3,200K / 4,000K	-	-
Lumens	800 lm	-	-
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black / Wood	White / Black

Code	☐ 4763	☐ round 4761	☐ round asymmetric 4821
	☒ 4764	☒ round 4762	☒ round asymmetric 4822
		☒ round 4935	☐ square asymmetric 4825
		☐ square 4823	☒ square asymmetric 4826
		☒ square 4824	☒ Custom RAL
		☒ Custom RAL	




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 25,000 HOURS | IP 44 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 38° | 50/60 Hz | IK06 | +40°C / -20°C | 1/5/20



Pulcom surface accessory



*Need Pulcom led (page 348).

Technical Information

Installation	Surface
Material	Polycarbonate
Finishes	White / Black / Wood
Code	☐ 5034 ☐ 5035 ☐ 5036 ☒ Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY | 1/50











Private Residence, Granollers (Spain). Construction: ABL Group. Design: Mon Arquitectura.

Pulsar switch

Pulsar



Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	Switch 2,700K / 3,200K / 4,000K	5.000K
Lumens	780 lm / 800 lm / 840 lm	860 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5057 ☒ 5058  Custom RAL	☐ 5.000K 4217 ☒ 5.000K 4218  Custom RAL

①

Custom RAL

① Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

IP 65

220/240 VAC

UGR <16

PF >0,9

CRI ≥85

40°

50/60 Hz

TRIAC DIMM

RT 2012 RECOMMANDATION THERMIQUE

+45°C
-20°C

1/10/30

New

Pulsar surface accessory

Pulsar asymmetric trim

Pulsar matt gold trim



*Need Pulsar (page 355).

Technical Information

Installation	Surface	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black / White-matt gold / Black-matt gold	White-matt gold/Black-matt gold
Code	☐ 5110 ☒ 5111 ⓘ Custom RAL	☐ 5059 ☒ 5060 ☒ 5212 5213 ⓘ Custom RAL	☒ 5206 ☒ 5207

1/20

1/50

1/50




ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY



Nano pulsar round



Nano pulsar square



Technical Information

Power	3,5W	3,5W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	170 lm / 180 lm / 200 lm	170 lm / 180 lm / 200 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2.700K4297 ☐ 3.000K4298 ☐ 4.000K4299 ☒ 2.700K4300 ☒ 3.000K4301 ☒ 4.000K4302  Custom RAL	☐ 2.700K4451 ☐ 3.000K4452 ☐ 4.000K4453 ☒ 2.700K4454 ☒ 3.000K4455 ☒ 4.000K4456  Custom RAL

☐

2.700K4451

☐

3.000K4452

☐

4.000K4453

☒

2.700K4454


☒

3.000K4455

☒

4.000K4456

☒

Custom RAL

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30,000 HOURS | IP 65 | 220/240 VAC | UGR <16 | PF >0,5 | CRI ≥80 | 30° | 50/60 Hz | | +40°C / -20°C | 1/50




New

Nano pulsar round
matt gold trim



Nano pulsar square
matt gold trim



*Need Nano Pulsar (page 358).

Technical Information

Installation	Recessed	Recessed
Material	Aluminium	Aluminium
Finishes	White-matt gold/Black-matt gold	White-matt gold/Black-matt gold
Code	5208 5209	5210 5211



3 YEARS WARRANTY | 1/4/300



Nano pulsar round
surface accessory




*Not included



Nano pulsar square
surface accessory



*Not included



*Need Nano Pulsar (page 358).

Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4410 ☐ 4411 ☒ Custom RAL	☐ 4412 ☐ 4413 ☒ Custom RAL



ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | 1/50






New

Oxo round dimmable



Oxo square dimmable



Technical Information

Power	12W	12W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.260 lm	1.260 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4457-D ☒ 4458-D ①  Custom RAL	☐ 4459-D ☒ 4460-D ①  Custom RAL

Accessories



Included with:
4457-D / 4459-D



Included with:
4457-D / 4458-D / 4459-D / 4460-D



① Consult delivery terms and conditions.







Mini oxo round 1





Mini oxo square 1



Technical Information

Power	6W	6W
Installation	Recessed	Recessed
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	600 lm	600 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black
Code	☐ 5061 ☒ 5062	☐ 5108 ☒ 5109







Mini oxo square 2





130X80mm



Mini oxo square 4





227X80mm



Mini oxo square 6



325X80mm



Technical Information


Power	12W	24W	36W
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1,200 lm	2,400 lm	3,600 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black	White / Black	White / Black

Code	☐ 5063	☐ 5065	☐ 5067
	☒ 5064	☒ 5066	☒ 5068


1/10

1/10

1/5





3 YEARS WARRANTY | 25,000 HOURS | | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 42° | 50/60 Hz | +40°C -20°C | CCT SWITCH

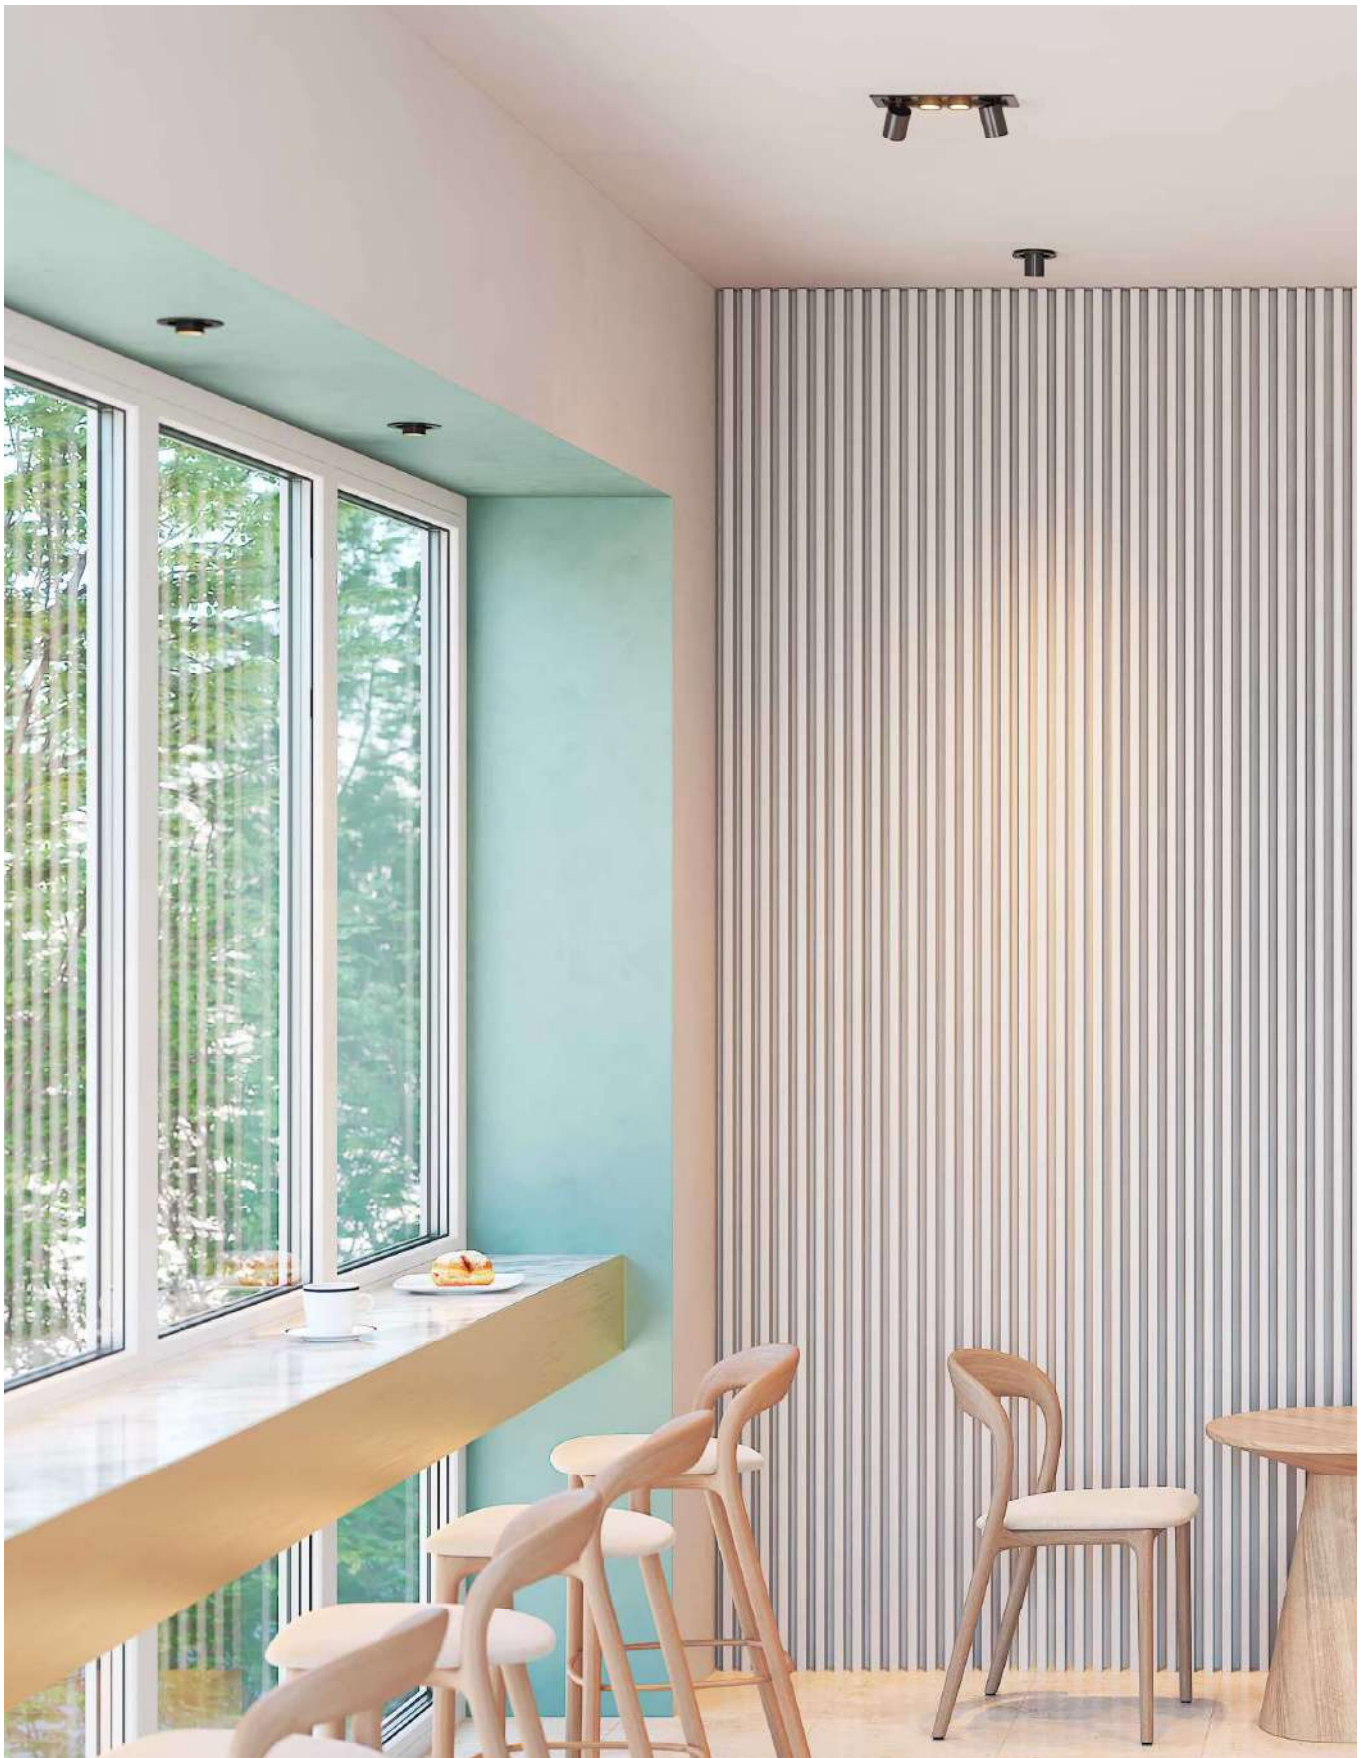




Nano oxo round

Nano oxo square



Technical Information

Power	4W	4W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	380 lm	380 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4549 ☒ 4551 Custom RAL	☐ 4550 ☒ 4552 Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY

30.000 HOURS

→

IP 20

220/240 VAC

UGR <19

PF >0,5

CRI ≥90

45°


50/60 Hz

+50°C
-20°C

CCT SWITCH


1/10/50



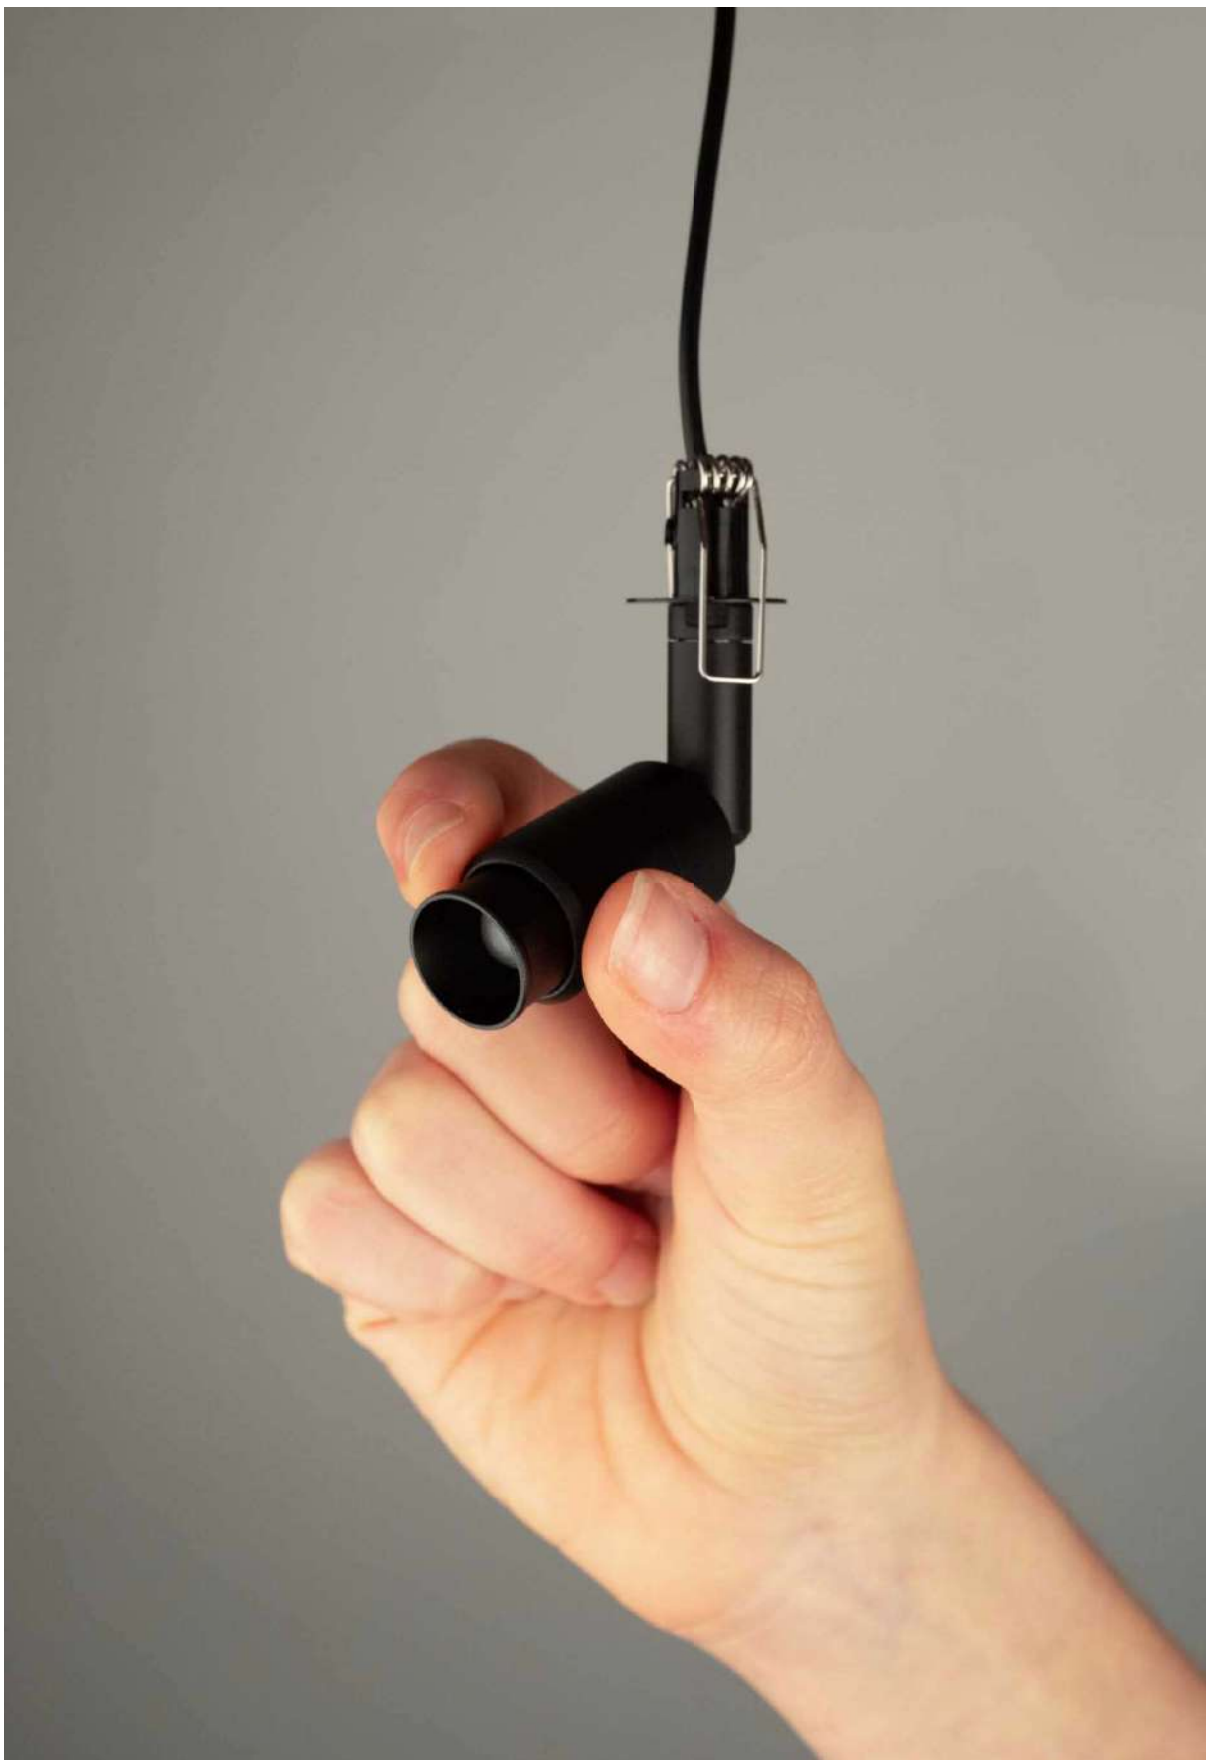


New

Micro zoom

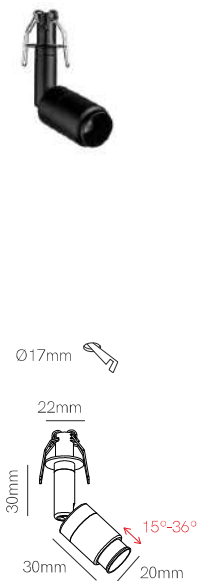

Micro zoom large

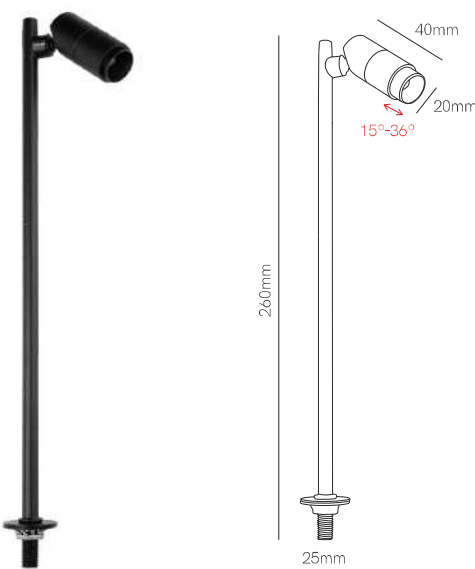


Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	70 lm	70 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2.700K 5273 ☐ 3.000K 5274 ☐ 4.000K 5275 ☒ 2.700K 5276 ☒ 3.000K 5277 ☒ 4.000K 5278	☐ 2.700K 5279 ☐ 3.000K 5280 ☐ 4.000K 5281 ☒ 2.700K 5282 ☒ 3.000K 5283 ☒ 4.000K 5284


1/100

1/50




New

Golf 200mm



Golf 400mm

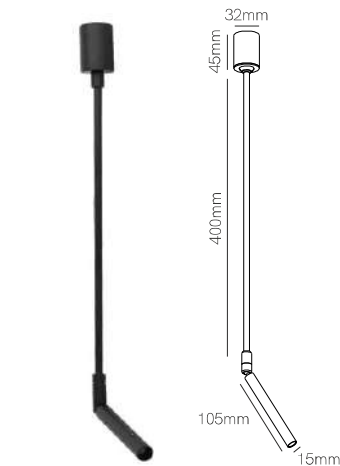

Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes


3,5W
Surface
2.700K / 3.000K / 4.000K
125 lm
Aluminium
White / Black

3,5W
Surface
2.700K / 3.000K / 4.000K
125 lm
Aluminium
White / Black

Code

☐	2.700K	5285
☐	3.000K	5286
☐	4.000K	5287
☒	2.700K	5288
☒	3.000K	5289
☒	4.000K	5290

☐	2.700K	5291
☐	3.000K	5292
☐	4.000K	5293
☒	2.700K	5294
☒	3.000K	5295
☒	4.000K	5296



3 YEARS WARRANTY

35,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,5

CRI ≥90

24°

50/60 Hz


+40°C

-20°C


1/50

New

Golf 600mm

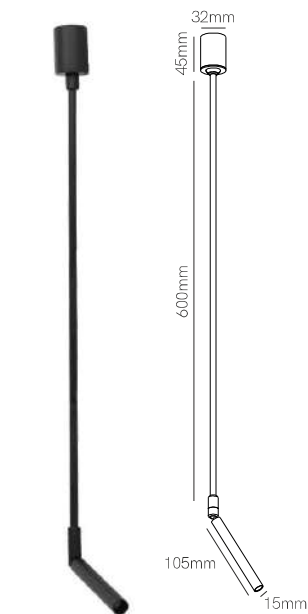


Golf 800mm

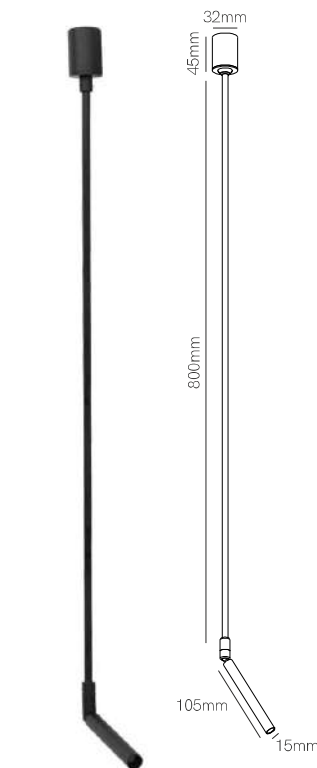

Technical Information

Power	3,5W	3,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	☐	2.700K	5297	☐	2.700K	5303
	☐	3.000K	5298	☐	3.000K	5304
	☐	4.000K	5299	☐	4.000K	5305
	☒	2.700K	5300	☒	2.700K	5306
	☒	3.000K	5301	☒	3.000K	5307
	☒	4.000K	5302	☒	4.000K	5308




3 YEARS WARRANTY | 35,000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 | CRI ≥90 | 24° | 50/60 Hz | +40°C / -20°C | 1/50



New


Atom



Technical Information

Power	2W
Installation	Recessed
Color Temperature	2.700K / 3.000K / 4.000K
Lumens	90 lm
Material	Aluminium
Finishes	White / Black

Code	☐	2.700K	5267
	☐	3.000K	5268
	☐	4.000K	5269
	☒	2.700K	5270
	☒	3.000K	5271
	☒	4.000K	5272



3 YEARS WARRANTY

35,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,5


CRI >90

24°



50/60 Hz

+40°C
-20°C

1/100

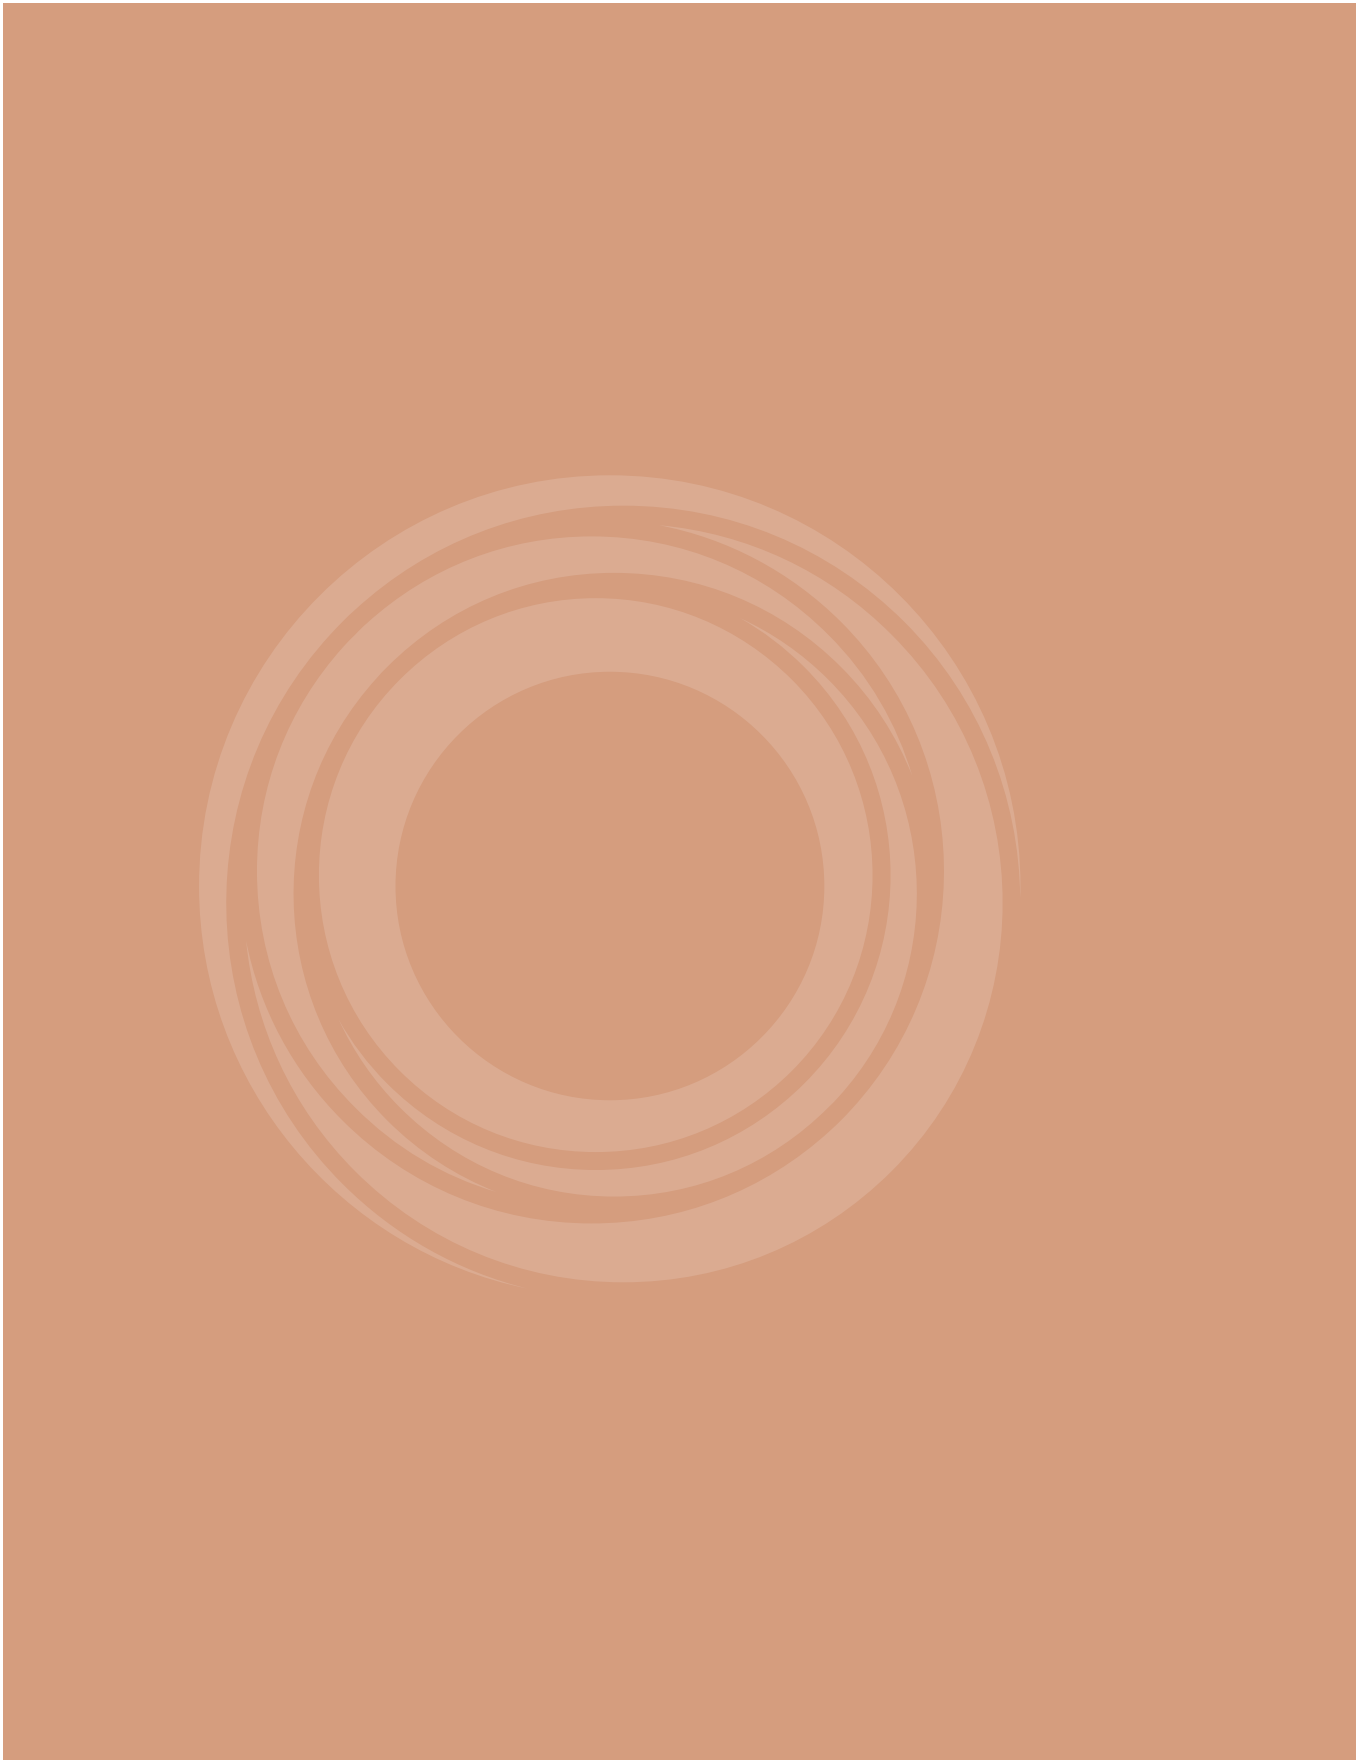

Decorative lighting

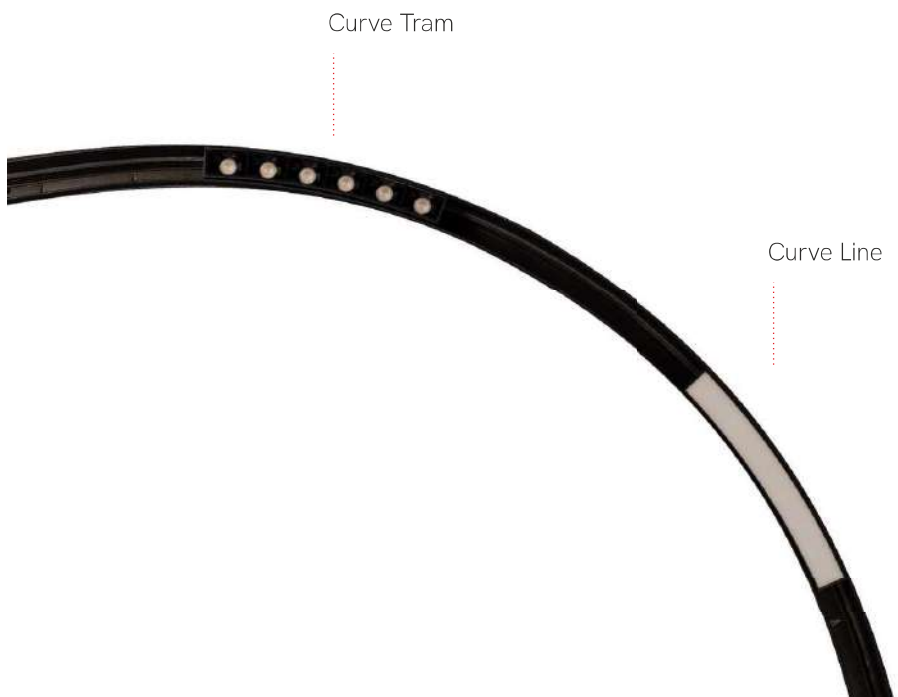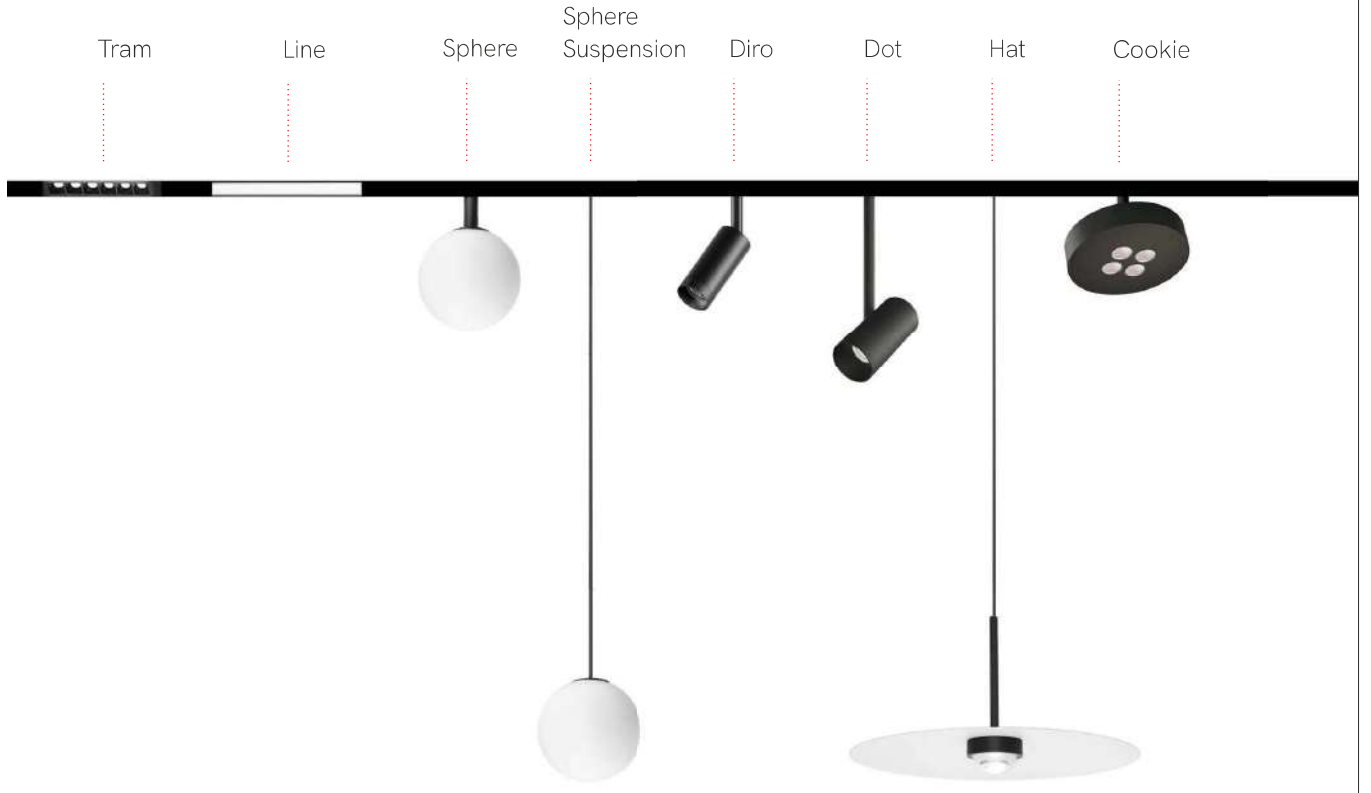

Cookie
Suspension

Bora


Bora
Suspension

Alp

Alp
Suspension

Zoe

Volt

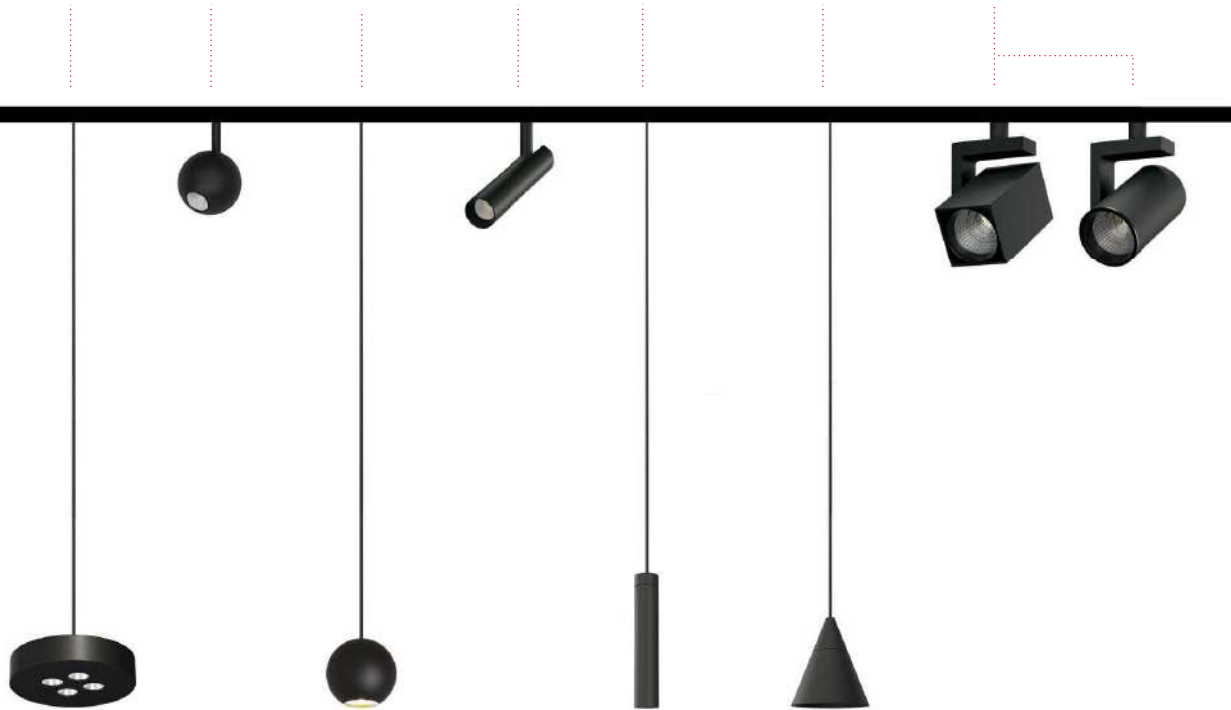

48V Magnet Track

Beneito Faure expands the collection for magnetic track and incorporates the curved track, a current trend in decorative lighting.

Thanks to the magnetized system, the spotlights are easily coupled and illuminate when they come into contact with the track.

Beneito Faure amplía la colección para carril magnético e incorpora el carril curvo, tendencia actual en iluminación decorativa.



Gracias al sistema imantado los focos se acoplan de forma sencilla y se iluminan cuando entran en contacto con el carril.



Tram 48V 4,5W



Tram 48V 9W



*Need power supply (page 408).



Technical Information


Power	4,5W	9W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	300 lm / 310 lm	690 lm / 710 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2,700K4776 ☐ 3,000K4777 ☒ 2,700K4778 ☒ 3,000K4779	☐ 2,700K4780 ☐ 3,000K4781 ☒ 2,700K4782 ☒ 3,000K4783




3 YEARS WARRANTY | 26,000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 24° | +40°C / -20°C | 1/50




Line 48V 7,5W



Line 48V 15W



Line 48V 30W



*Need power supply (page 408).



Technical Information

Power	7,5W	15W	30W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K	2.700K / 3.000K
Lumens	310 lm / 320 lm	740 lm / 760 lm	1.000 lm / 1.050 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	2.700K5202New	2.700K5203New	2.700K5204New
	3.000K4784	3.000K4785	3.000K4786
	1/25	1/25	1/20





3 YEARS WARRANTY | 26,000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 100° | +40°C / -20°C

New

Curve tram 48V



Curve line 48V



*Need power supply (page 408).

Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes

6W
Magnet Track
2.700K / 3.000K
500 lm
Aluminium
White / Black

8W
Magnet Track
2.700K / 3.000K
300 lm
Aluminium
White / Black

Code

☐	2.700K	5309
☐	3.000K	5310
☒	2.700K	5311
☒	3.000K	5312

☐	2.700K	5313
☐	3.000K	5314
☒	2.700K	5315
☒	3.000K	5316



3 YEARS WARRANTY

30.000 HOURS

IP 20

48V DC


UGR <19

CRI ≥90


1/40

New

Sphere 48V



Sphere suspension 48V

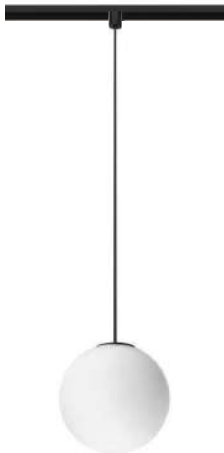


*Need power supply (page 408).



Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	255 lm	255 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White / Black	White / Black
Code	☐ 2,700K5369 ☐ 3,000K5370 ☒ 2,700K5372 ☒ 3,000K5373	☐ 2,700K5375 ☐ 3,000K5376 ☒ 2,700K5378 ☒ 3,000K5379



3 YEARS WARRANTY

30.000 HOURS

IP 20

48V DC


UGR <19

360°

+40°C
-20°C

1/12



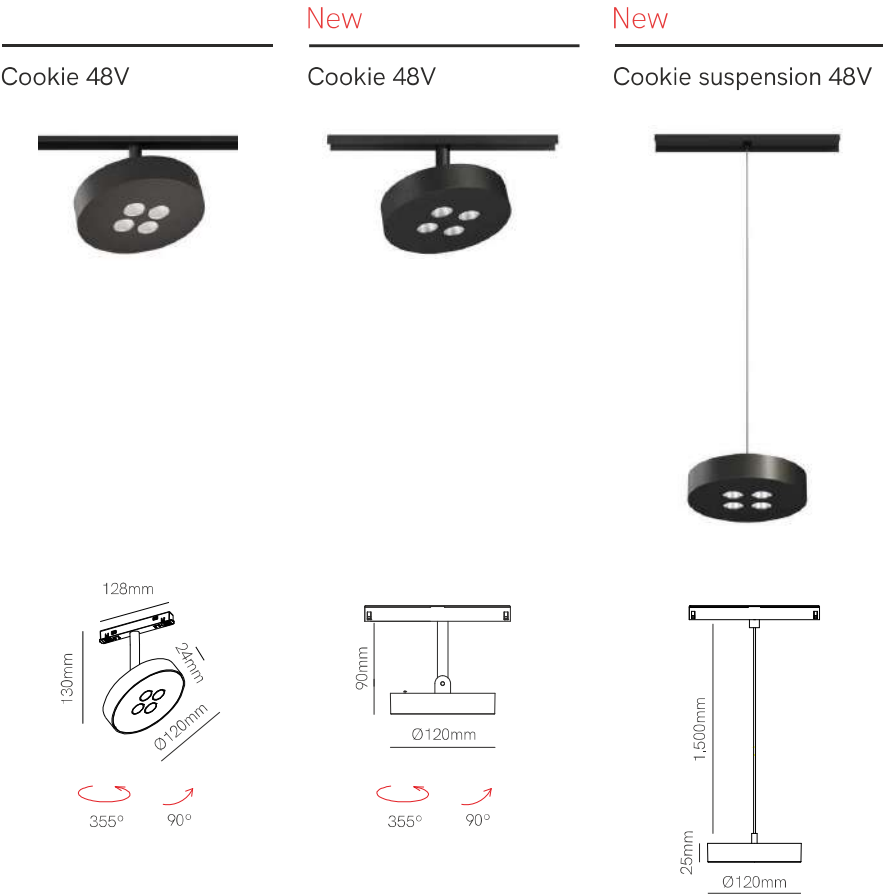

*Need power supply (page 408).

Technical Information

Power	12W	12W	12W
Installation	Magnet Track	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	Dali 2.700K - 4.000K	Dali 2.700K - 4.000K
Lumens	940 lm / 950 lm	500 lm - 700 lm	500 lm - 700 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 2.700K 4772 ☐ 3.000K 4773 ☒ 2.700K 4774 ☒ 3.000K 4775 ☒ Custom RAL	☐ 5181 ☒ 5182 ☒ Custom RAL	☐ 5185 ☒ 5186 ☒ Custom RAL

26,000
HOURS

30.000
HOURS



30.000
HOURS



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

IP 20

48V DC

UGR <19

CRI ≥90

38°

+40°C
-20°C


1/20







Dot 48V



*Need power supply (page 408).

Technical Information

Power	11W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	680 lm / 690 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 2.700K4768 ☐ 3.000K4769

☒☒



Custom RAL

ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

26,000
HOURS

IP
20

48V
DC

UGR
<19

CRI
≥90


35°

+40°C
-20°C


1/20



Bora 48V



Bora 48V suspension




*Need power supply (page 408).




Technical Information

Power	4,5W	8,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	315 lm / 325 lm	610 lm / 620 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Back / Chrome / Rose gold
Code	2.700K 4581 3.000K 4582 2.700K 4583 3.000K 4584 2.700K 4585 3.000K 4586 2.700K 4587 3.000K 4588 UGR <10 38°	2.700K 4573 3.000K 4574 2.700K 4575 3.000K 4576 2.700K 4577 3.000K 4578 2.700K 4579 3.000K 4580 UGR <15 36°






Alp 48V



Alp suspension 48V



*Need power supply (page 408).



Technical Information


Power	4,5W	4,5W
Installation	Magnet Track	Magnet Track
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	260 lm / 270 lm	260 lm / 270 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2.700K 4787 ☐ 3.000K 4788 ☒ 2.700K 4789 ☒ 3.000K 4790 ☒ Custom RAL 1/20	☐ 2.700K 4791 ☐ 3.000K 4792 ☒ 2.700K 4793 ☒ 3.000K 4794 ☒ Custom RAL 1/25



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 48V DC | UGR <19 | CRI ≥90 | 38° | +40°C / -20°C

Zoe 48V



*Need power supply (page 408).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	360 lm / 370 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 2.700K 4795
	☐ 3.000K 4796
	☒ 2.700K 4797
	☒ 3.000K 4798
	☒ Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

26.000 HOURS

IP 20

48V DC

UGR <19

CRI ≥90


38°

+40°C
-20°C

1/36

New

Hat 48V




*Need power supply (page 408).



Technical Information

Power	8W
Installation	Magnet Track
Color Temperature	2.700K / 3.000K
Lumens	835 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 2.700K 5363 ☐ 3.000K 5364 ☒ 2.700K 5366 ☒ 3.000K 5367



3 YEARS
WARRANTY

30,000
HOURS

IP 20



48V DC

83°



Volt round 48V

Volt square 48V



*Need power supply (page 408).

Technical Information

Power	8W	8W
Installation	Magnet Track	Magnet Track
Color Temperature	Dali 2,700K - 4,000K	Dali 2,700K - 4,000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5037 ☒ 5038  Custom RAL	☐ 5039 ☒ 5040  Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS



IP 20

48V DC



38°










1/20



New

Diro



*Need power supply (page 408).

Technical Information

Power	7W
Installation	Magnet Track
Color Temperature	Dali 2,700K - 6,500K
Lumens	420 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5239 ☒ 5238

Accessories



Honeycomb anti-glare
(Included)



5 YEARS WARRANTY

50,000 HOURS

IP 20

48V DC

UGR <10

CRI ≥90


36°

+40°C
-20°C

1/20

New

Fine 25 circle 48V



*Need power supply (page 408).

Technical Information

Power	19W
Installation	Magnet Track
Color Temperature	3,000K / 4,000K
Lumens	850 lm / 950 lm
Finishes	Aluminium / Black
Code	3,000K 5431 4,000K 5441 3,000K 5432 4,000K 5442



3 YEARS
WARRANTY

35,000
HOURS

IP
20

48V
DC

CRI
≥90

360°

+40°C
-20°C

1

Casambi magnet track control New

472x CASAMBI is a master DALI device, using Bluetooth technology, suitable for monomaster applications, developed to control DALI lamps via mobile devices, using the Casambi app. 64 lamps (control gear) can be programmed, and assigned to up to 8 groups.


Power supply 24Vdc to 48Vdc, not polarized. Fused and protected against voltage peaks.
Two automatic programming modes, Standard and Fast Group, to program new lamps found on the bus.

Allows for the connection of up to 64 DALI lamps (control gear), assigning them to up to 8 groups.
Fixtures available for: Broadcast control, 8 groups, 4 TW groups.
The lamps on the bus are controlled by means of group commands: each lamp will execute only commands sent to its belonging group.

472x CASAMBI es un dispositivo maestro DALI, con tecnología Bluetooth, adecuado para aplicaciones monomáster, está desarrollado para controlar lámparas DALI a través de dispositivos móviles, utilizando la app Casambi.
Se pueden programar 64 lámparas (equipo de control) y asignarlas a hasta un máximo de 8 grupos.

Fuente de alimentación de 24 Vdc a 48 Vdc, no polarizada, fusionada y protegida contra picos de voltaje. Dos modos de programación automática, Estándar y Grupo Rápido, para programar nuevas lámparas que se encuentren en el bus.

Permite la conexión de hasta 64 lámparas DALI (equipos auxiliares), asignándolas a un máximo de 8 grupos.
Dispositivos disponibles para: Control de difusión, 8 grupos, 4 grupos TW.
Las lámparas del bus se controlan mediante comandos de grupo: cada lámpara ejecutará sólo los comandos enviados a su grupo de pertenencia.

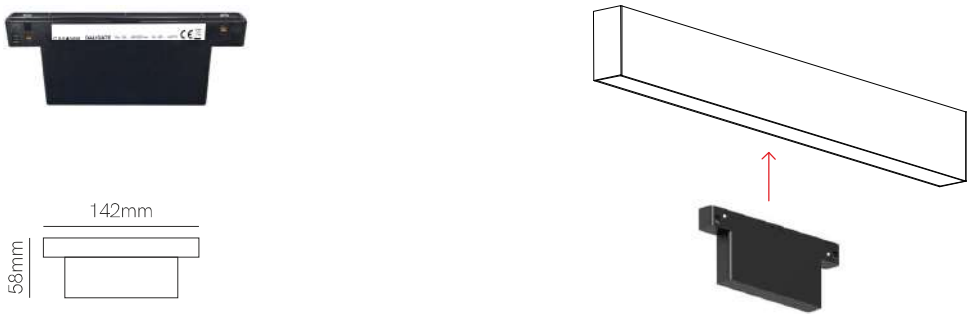

Code	Version	Power	IP	VDC OUT	Size
 6721	Casambi magnet track control	8W	IP20	24-48 VDC	142x58x18mm
 6722	Casambi magnet track control	8W	IP20	24-48 VDC	142x58x18mm

3 YEARS
WARRANTY

24-48V
DC


 



 +40°C
-20°C

 1

Magnet track accessories

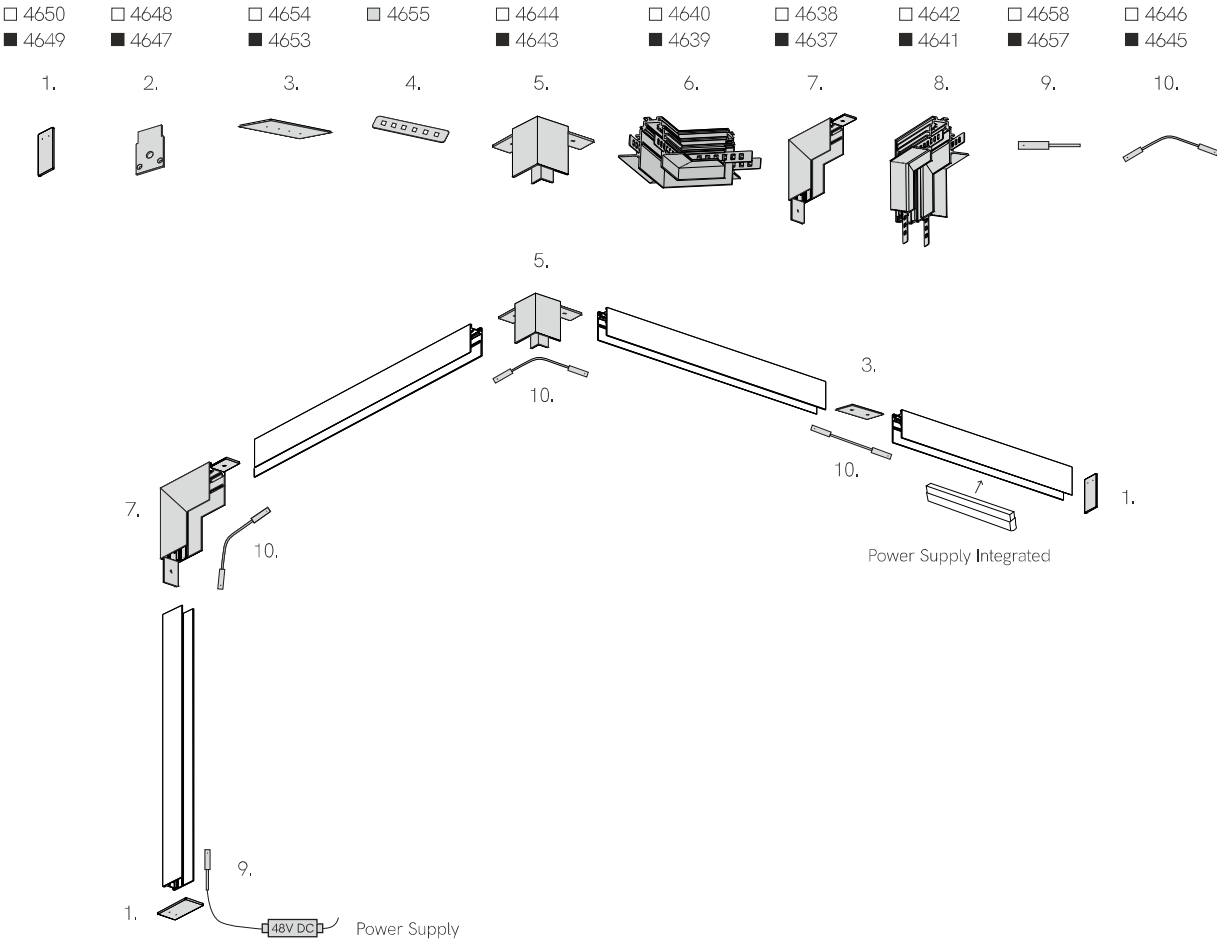

**Magnet track surface**

W: 26mm H: 53mm

☐	1m	4660
☐	2m	4662
☒	1m	4659
☒	2m	4661

**Magnet track recessed**

W: 72mm x H: 55mm

☐	1m	4664
☐	2m	4666
☒	1m	4663
☒	2m	4665



x2

End cap surface

L: 53mm W: 26,6mm H: 2mm

☐	4650
☒	4649



x2

End cap recessed

L: 52mm W: 32mm H: 2mm

☐	4648
☒	4647



x1 + x2

L joint wall ceiling surface

L: 100mm W: 100mm H: 26mm

☐	4638
☒	4637



x1 + x4

L joint wall ceiling recessed

L: 100mm W: 100mm H: 72mm

☐	4642
☒	4641



x1 + x2

L joint ceiling surface

L: 40mm W: 40mm H: 53mm

☐	4644
☒	4643



x1 + x4

L joint ceiling recessed

L: 100mm W: 100mm H: 55mm

☐	4640
☒	4639



New

Curve magnet track surface

W: 26mm H: 53mm

☐	R500 1/4	5317
☒	R500 1/4	5319



New

Curve track end cap

L: 53mm W: 26,6mm H: 2mm

☐	5428
☒	5427

**Linear joint surface**

L: 80mm W: 22,5mm H: 2mm

☐	4654
☒	4653



x2

Linear joint recessed

L: 70mm W: 11,5mm H: 1mm

☒	4655
-------------------------------------	------

**Start connector**

L: 98mm W: 18mm H: 18mm

☐	4658
☒	4657

**Central corner connector**

L: 98mm W: 18mm H: 18mm

☐	4646
☒	4645

**PVC trim**

W: 26,8mm H: 3,5mm

☒	1m	4651
☒	2m	4652

**Suspension kit**

L: 45mm W: 22mm | Ø15mm H: 1,900mm

☒	4807
-------------------------------------	------

Create your own design with **Space**

Space is a lighting concept that seeks to be part of the design and finishes of a room. This lighting system creates an unlimited number of lines and compositions that are born out of a surface base. The final design is left to the user, who can select and customize the distribution of the luminaire in the space.

Space es un concepto de iluminación que busca formar parte del diseño y acabados de un espacio. Este sistema de iluminación crea trazos y composiciones ilimitadas que nacen de una base de superficie. El diseño final queda en manos del usuario, el cual puede escoger y personalizar como distribuye la luminaria a través del espacio.



This innovative system allows you to create spectacular vertical suspended compositions by means of a unique and incomparable design. With our decorative spotlights it is possible to create entirely customizable light points at different heights. The Space system, supported by a thread up to six meters long, is compatible with Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL and Lievo XL decorative products. Choose the size of the base that best suits the composition among different diameters and create your own luminaire.




Este innovador sistema permite crear composiciones colgantes verticales espectaculares a través de un diseño único e irrepetible. Con nuestros spotlights decorativos es posible crear puntos de luz a distintas alturas totalmente personalizables. El sistema Space, sostenido por un hilo de hasta seis metros de largo, es compatible con los productos decorativos Bora, Zoe, Lievo, Alp, Nano Alp, Bora XL, Zoe XL y Lievo XL. Escoge el tamaño de la base que mejor se adapte a la composición entre distintos diámetros y crea tu propia luminaria.




The light points of the Space system can be moved away from the base and brought to any place desired through the wire holder. It is a piece that is mounted on the surface of the ceiling to support the conductor wire of the lighting structure. This system of hanging lamps gives total freedom to architects and interior designers to create repetitions of light that can compose from chaotic structures to the most symmetrical. If you have a false ceiling where the driver can rest, you can use the system with the individual recessed base, a great option for integrating the structure in an elegant way.

Los puntos de luz del sistema Space pueden alejarse de la base y llevarse a cualquier ubicación deseada a través del wire holder. Se trata de una pieza que se instala en la superficie del techo para sostener el hilo conductor de la estructura lumínica. Este sistema de lámparas colgantes ofrece una total libertad a arquitectos e interioristas para crear repeticiones de luz que pueden componer desde estructuras caóticas, hasta las más simétricas. En caso de contar con un falso techo donde pueda reposar el driver, puedes usar el sistema con la base individual de encastrar, una muy buena opción para integrar de forma elegante la estructura.



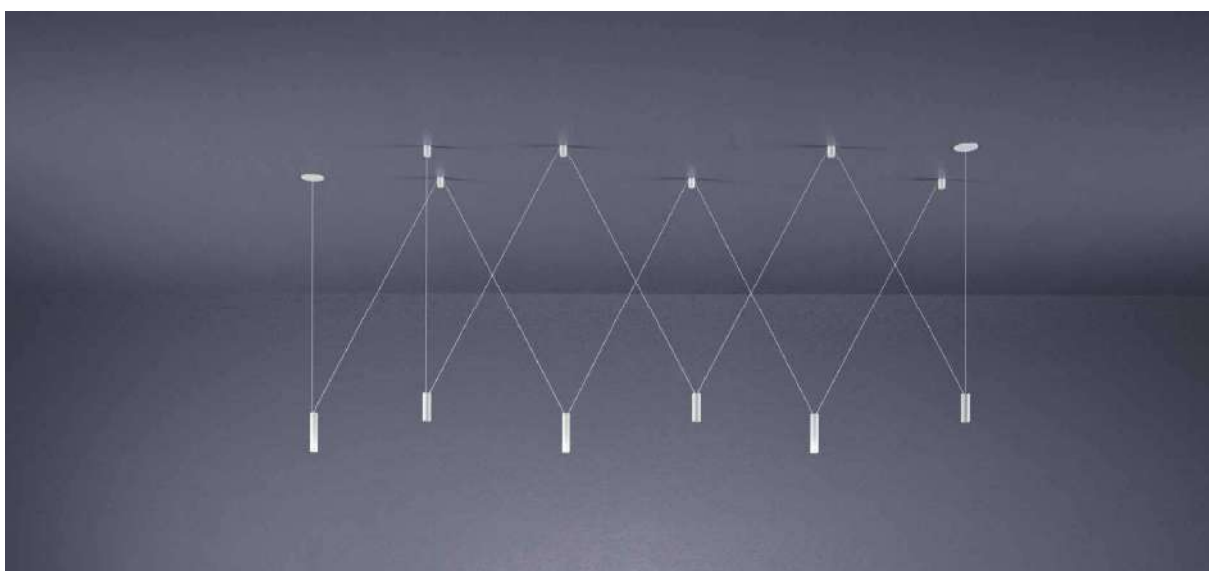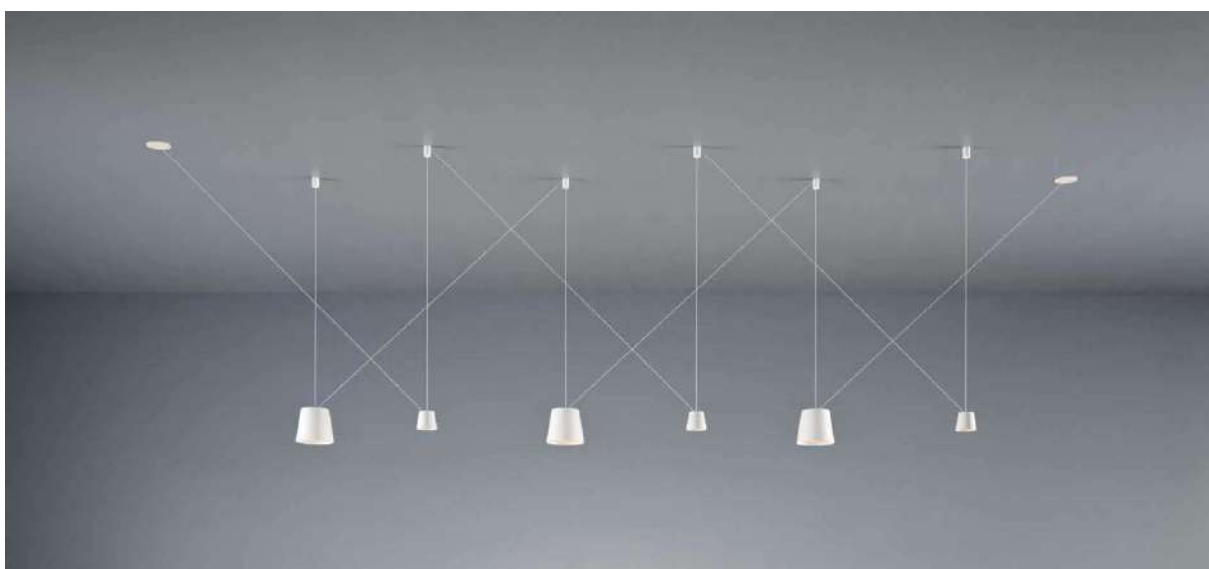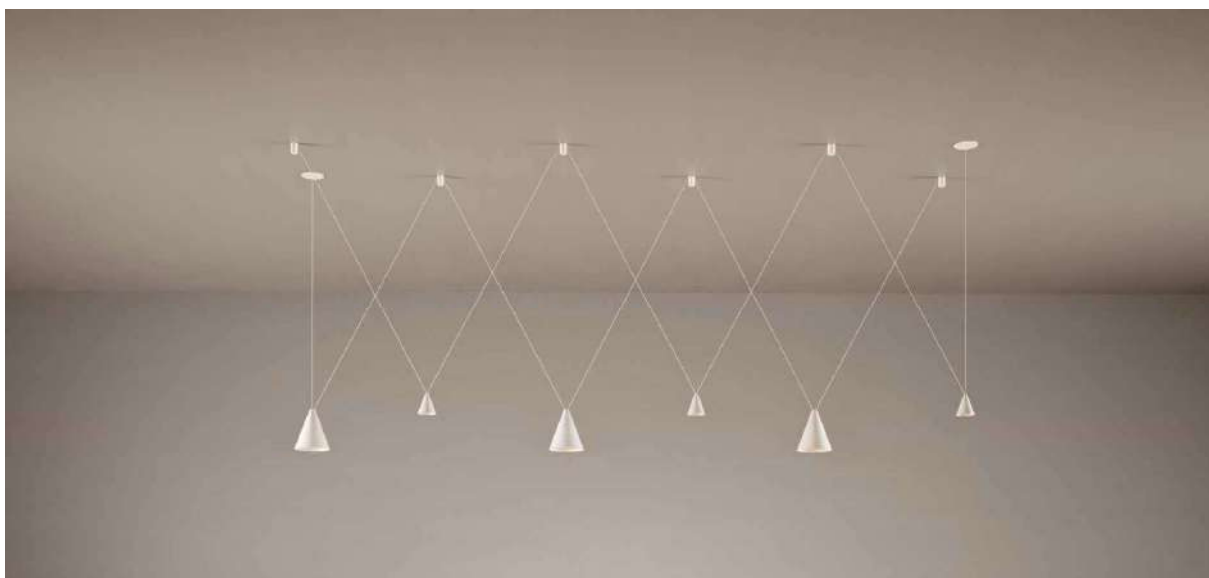

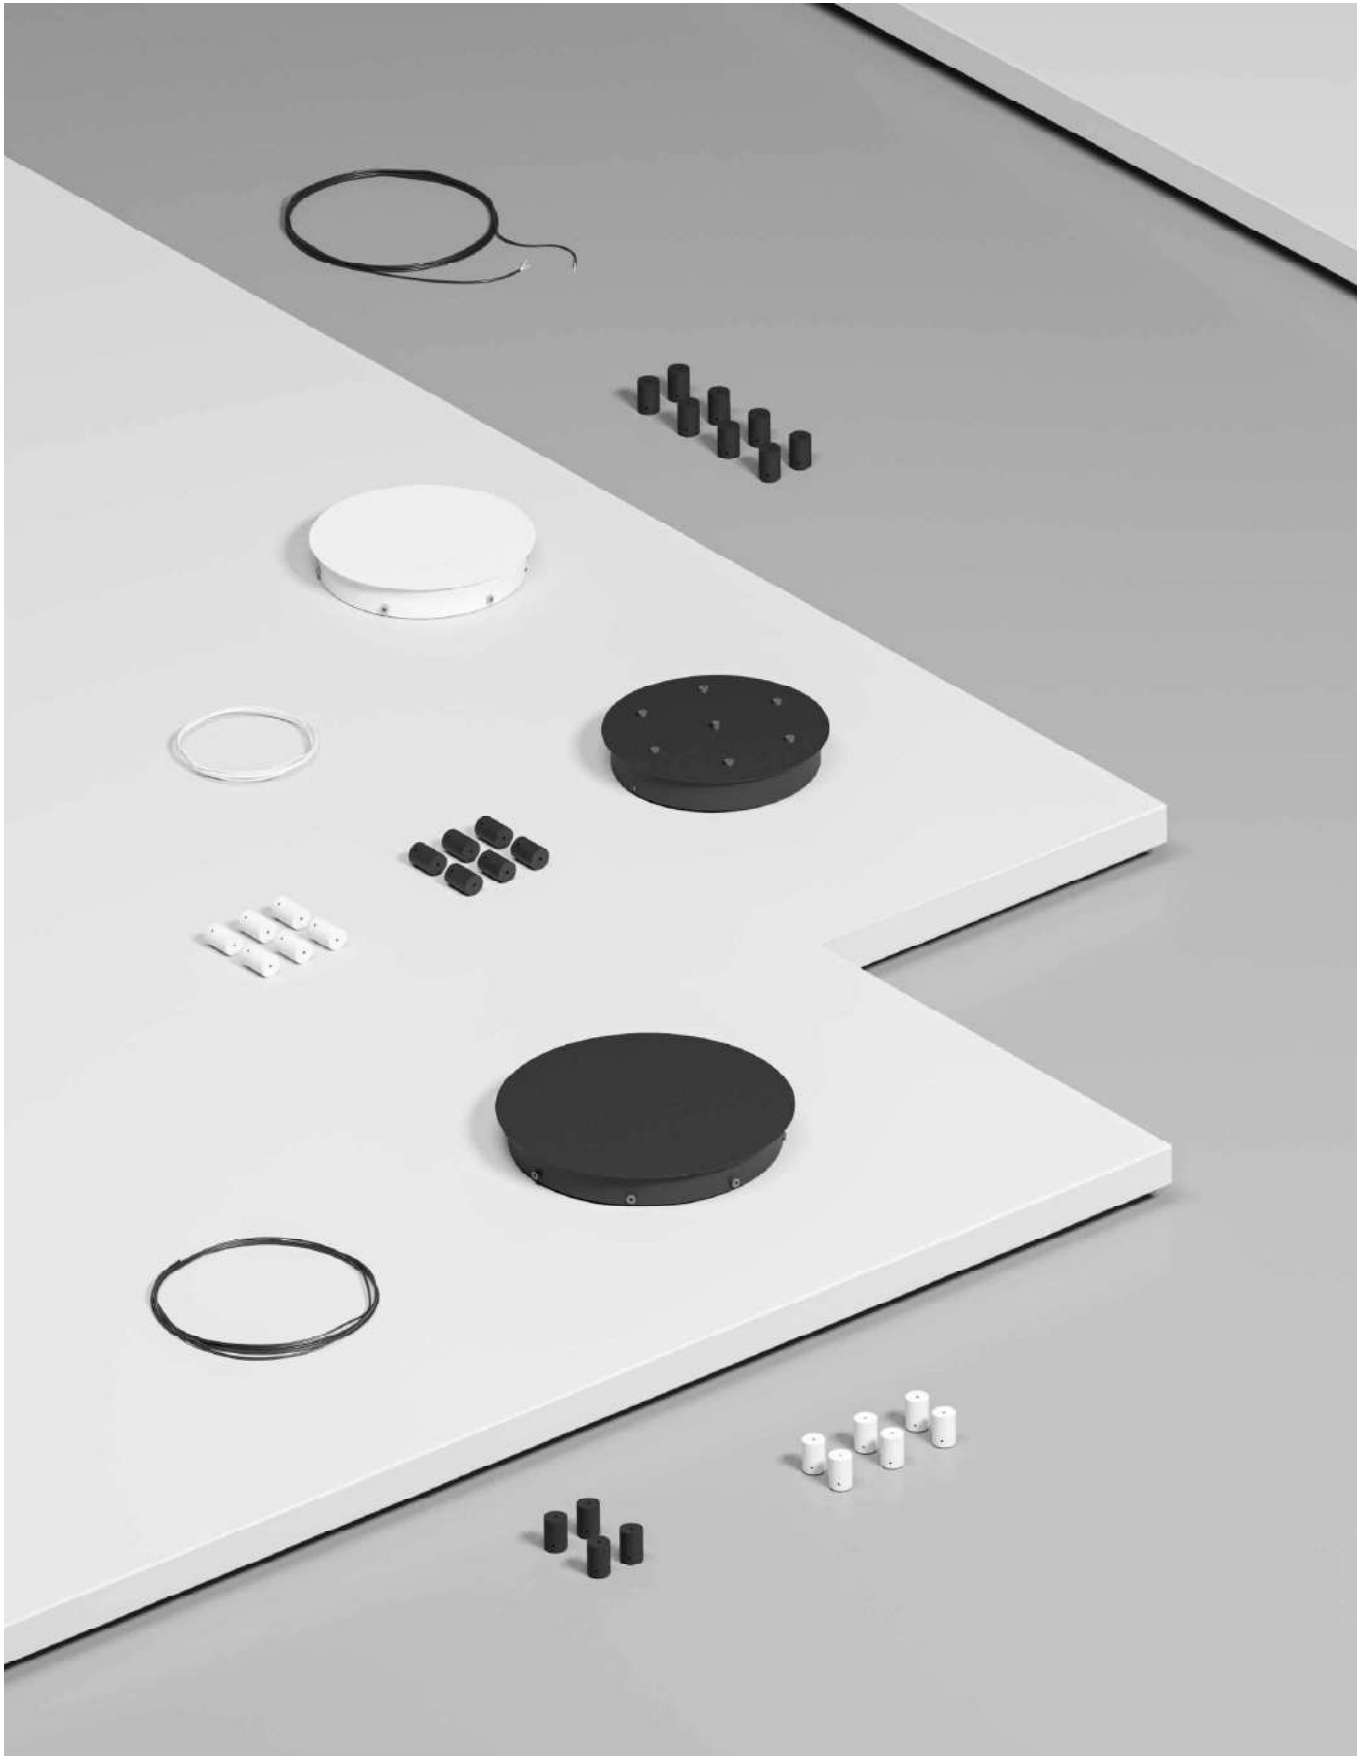



Side base

Base Ø250x41mm



Code	Product	Units	Driver	Color
Code S1	Bora 1	2 units 2	On / Off 1	☐ White 1
	Zoe 3	3 units 3	Dali 2	☒ Black 2
	Lievo 5	4 units 4	Triac 3	Custom RAL
	Alp 7	5 units 5	Casambi 5	
	Nano Alp 8	6 units 6		

Code: **S1**

Base Ø280x41mm



Code	Product	Units	Driver	Color
Code S2	Bora 1	2 units 2	On / Off 1	☐ White 1
	Zoe 3	3 units 3	Dali 2	☒ Black 2
	Lievo 5	4 units 4	Triac 3	Custom RAL
	Alp 7	5 units 5	Casambi 5	
	Nano Alp 8	6 units 6		

Code: **S2**

Base Ø330x41mm



Code	Product	Units	Driver	Color
Code S3	Bora 1	2 units 2	On / Off 1	☐ White 1
	Bora XL 2	3 units 3	Dali 2	☒ Black 2
	Zoe 3	4 units 4	Triac 3	Custom RAL
	Zoe XL 4	5 units 5	Casambi 5	
	Lievo 5	6 units 6		
	Lievo XL 6	7 units 7		
	Alp 7	8 units 8		
	Nano Alp 8			

Code: **S3** 

ⓘ Consult delivery terms and conditions.

Accessories



Wire holder
☐ 5106
☒ 5107



Additional wire (1m). Max. length 6m
☐ 5128
☒ 5129



*Create your code according to your preferences. For other finishing please consult.





Front base

Base Ø250x41mm



Code

Code **F1**

Product

Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp	7	5 units	5
Nano Alp	8	6 units	6

Units

Driver

On / Off	1
Dali	2
Triac	3
Casambi	5

Color

☐ White	1
☒ Black	2
Custom RAL	

Code: **F1**

Base Ø280x41mm



Code

Code **F2**

Product

Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp	7	5 units	5
Nano Alp	8	6 units	6

Units

Driver

On / Off	1
Dali	2
Triac	3
Casambi	5

Color

☐ White	1
☒ Black	2
Custom RAL	

Code: **F2**

Base Ø330x41mm



Code

Code **F3**

Product

Bora	1	2 units	2
Zoe	3	3 units	3
Lievo	5	4 units	4
Alp	7	5 units	5
Nano Alp	8	6 units	6
		7 units	7
		8 units	8

Units

Driver

On / Off	1
Dali	2
Triac	3
Casambi	5

Color

☐ White	1
☒ Black	2
Custom RAL	

Code: **F3**

Base Ø330x41mm



Code

Code **F3**

Product

Bora XL	2	2 units	2
Zoe XL	4	3 units	3
Lievo XL	6		

Units

Driver

On / Off	1
Dali	2
Triac	3
Casambi	5

Color

☐ White	1
☒ Black	2
Custom RAL	

Code: **F3** 

ⓘ Consult delivery terms and conditions.

Accessories



Wire holder

☐ 5106
☒ 5107



Additional wire (1m). Max. length 6m

☐ 5128
☒ 5129



*Create your code according to your preferences. For other finishing please consult.

3 YEARS
WARRANTYIP
20220/240
VACPF
>0,950/60
Hz

TRIAC DIMM







Private Residence, Rubí (Spain), Design: Prêt-à-porter casas.

Bora suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	8W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5084
	☒ 5085
	 Custom RAL

 Consult delivery terms and conditions.

Accessories


 Surface Base 8W Ø75x33mm ☐ 5118 ☒ 5119	 Recessed Base 8W Ø90x22mm /  Ø80mm ☐ 5120 ☒ 5121	 Wire holder ☐ 5106 ☒ 5107	 Additional wire (1m) ☐ 5128 ☒ 5129	 Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm
---	--	---	--	--



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY	30.000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	 CRI ≥93	 38°	50/60 Hz	 +45°C -20°C	 CCT SWITCH	 1/20
------------------	--------------	-------	-------------	---------	---------	---	--	----------	--	--	--

Bora XL suspension



*Base not included, You need to choose a base to complete the installation.

Technical Information

Power	15W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.100 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5086
	☒ 5087
	Custom RAL

Consult delivery terms and conditions.

Accessories

 Surface Base 15W Ø75x33mm ☐ 5122 ☒ 5123	 Recessed Base 15W Ø90x22mm / Ø80mm ☐ 5124 ☒ 5125	 Wire holder ☐ 5106 ☒ 5107	 Additional wire (1m) ☐ 5128 ☒ 5129	 Side base / Front base Ø250mm Side base / Front base Ø280mm Side base / Front base Ø330mm
---	---	--	---	---




*See pages 416 and 418 for available codes of Side base and Front base.


3 YEARS WARRANTY	30.000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	CRI ≥93	38°	50/60 Hz	+45°C -20°C	CCT SWITCH	1/20
------------------	--------------	-------	-------------	---------	---------	---------	-----	----------	----------------	------------	------



 Electrolytic Plating BRB1
On demand

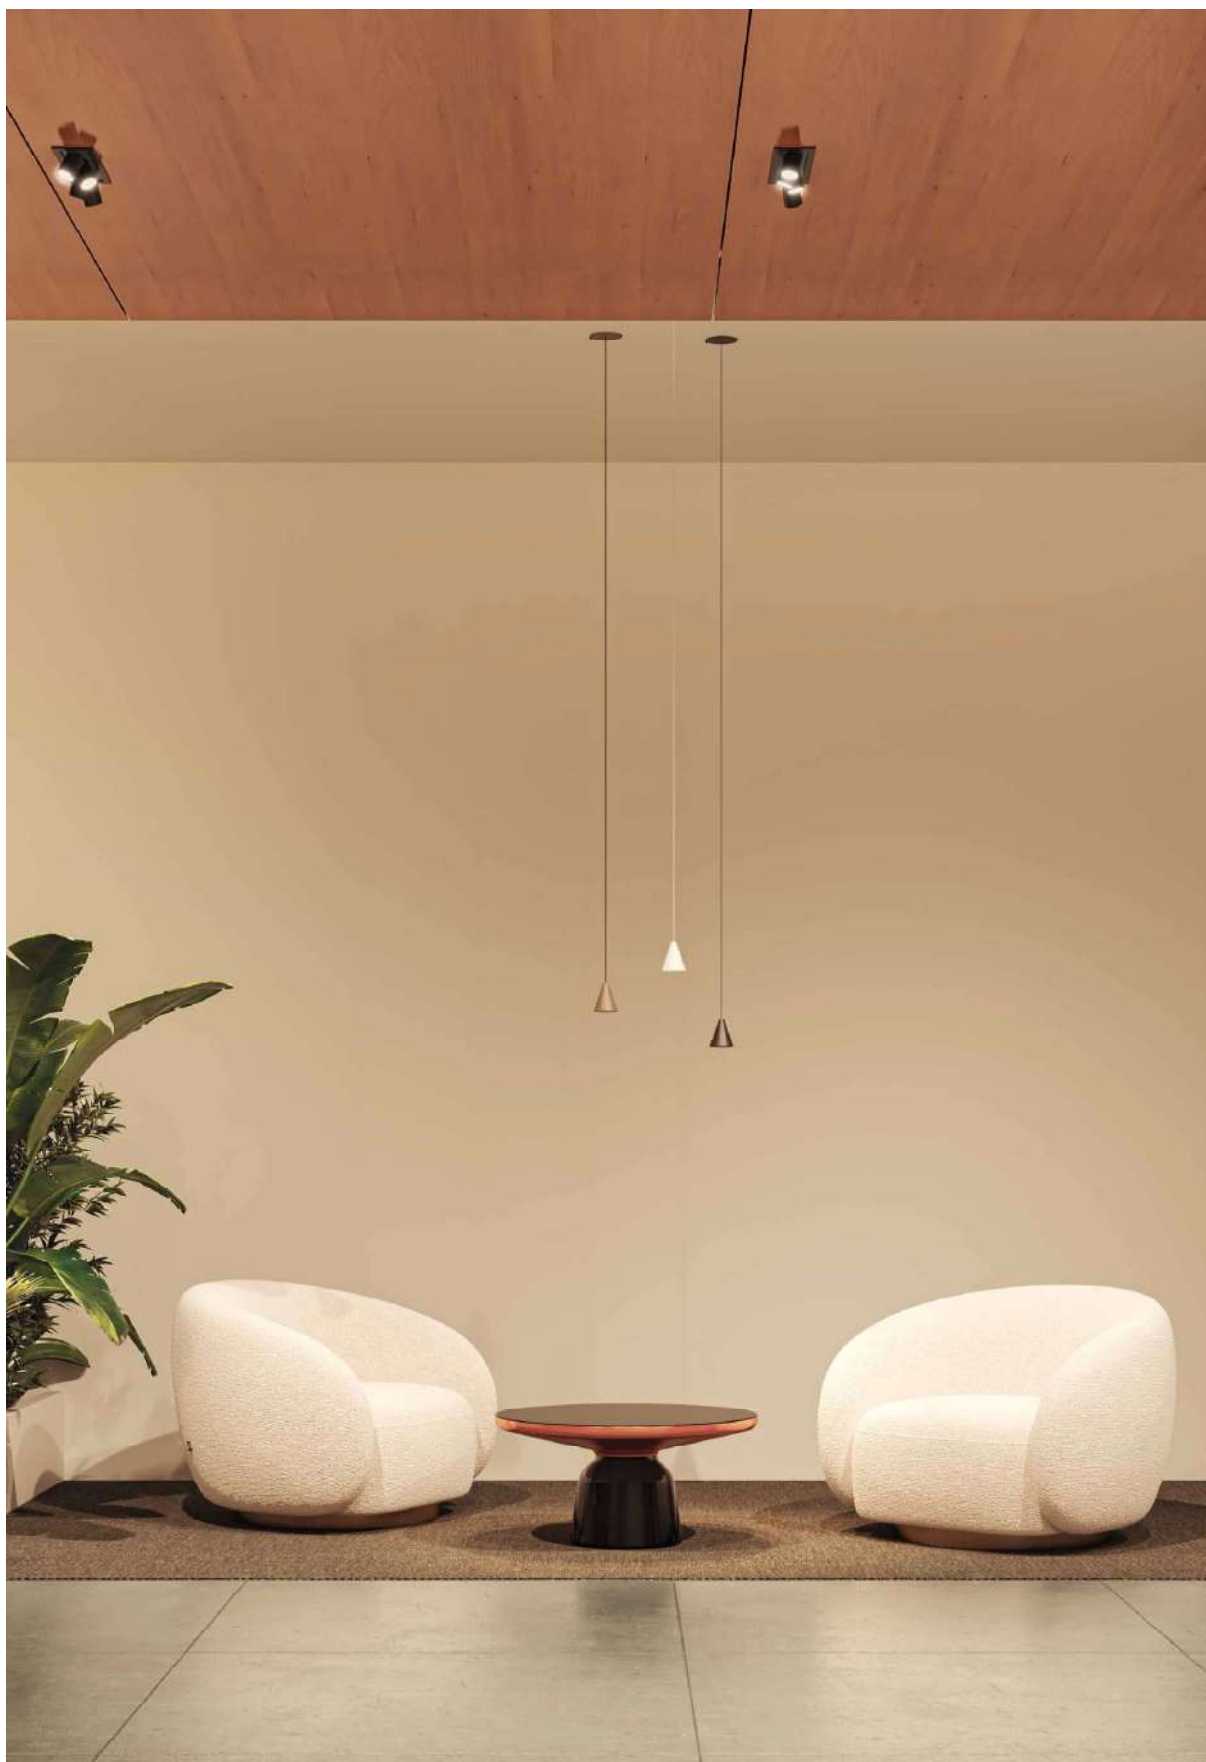

Zoe suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	8W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5092
	☒ 5093
	 Custom RAL

 Consult delivery terms and conditions.

Accessories



Surface Base 8W
Ø75x33mm
☐ 5118
☒ 5119



Recessed Base 8W
Ø90x22mm /  Ø80mm
☐ 5120
☒ 5121




Wire holder
☐ 5106
☒ 5107



Additional wire (1m)
☐ 5128
☒ 5129




Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY	30,000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	 CRI ≥93	 38°	50/60 Hz	 +40°C -20°C	 CCT SWITCH	 1/20
---------------------	-----------------	----------	----------------	------------	------------	--	--	-------------	--	---	--

Zoe XL suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	15W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.100 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5094
	☒ 5095
	Custom RAL

Consult delivery terms and conditions.

Accessories

Surface Base 15W
Ø75x33mm
☐ 5122
☒ 5123

Recessed Base 15W
Ø90x22mm / Ø80mm
☐ 5124
☒ 5125

Wire holder
☐ 5106
☒ 5107

Additional wire (1m)
☐ 5128
☒ 5129

Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY

30.000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

CRI ≥93

38°

50/60 Hz

+45°C
-20°C

CCT SWITCH

1/20





Nano alp suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	5W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	370 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5096
	☒ 5097
	Custom RAL

Consult delivery terms and conditions.

Accessories



Surface Base 5W
Ø75x33mm
☐ 5114
☒ 5115



Recessed Base 5W
Ø90x22mm / Ø80mm
☐ 5116
☒ 5117




Wire holder
☐ 5106
☒ 5107



Additional wire (1m)
☐ 5128
☒ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30,000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 | CRI ≥93 | 45° | 50/60 Hz | +40°C / -20°C | CCT SWITCH | 1/20

Alp suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	5W
Installation	Surface / Recessed
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	370 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5098
	☒ 5099
	Custom RAL

Consult delivery terms and conditions.

Accessories

Surface Base 5W
Ø75x33mm
☐ 5114
☒ 5115

Recessed Base 5W
Ø90x22mm / Ø80mm
☐ 5116
☒ 5117

Wire holder
☐ 5106
☒ 5107

Additional wire (1m)
☐ 5128
☒ 5129

Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY

30,000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

CRI ≥93

45°

50/60 Hz

+40°C
-20°C


CCT SWITCH

1/20





Lievo suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	8W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5088
	☒ 5089
	 Custom RAL

 Consult delivery terms and conditions.

Accessories



Surface Base 8W
Ø75x33mm
☐ 5118
☒ 5119



Recessed Base 8W
Ø90x22mm /  Ø80mm
☐ 5120
☒ 5121




Wire holder
☐ 5106
☒ 5107



Additional wire (1m)
☐ 5128
☒ 5129




Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY | 30.000 HOURS | IP 20 | 100/277 VAC | UGR <19 | PF >0,9 |  CRI ≥93 |  38° | 50/60 Hz |  +45°C -20°C |  CCT SWITCH |  1/20

Lievo XL suspension



*Base not included. You need to choose a base to complete the installation.

Technical Information

Power	15W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1.100 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5090
	☒ 5091
	 Custom RAL

 Consult delivery terms and conditions.

Accessories



Surface Base 15W
Ø75x33mm
☐ 5122
☒ 5123



Recessed Base 15W
Ø90x22mm /  Ø80mm
☐ 5124
☒ 5125



Wire holder
☐ 5106
☒ 5107



Additional wire (1m)
☐ 5128
☒ 5129



Side base / Front base Ø250mm
Side base / Front base Ø280mm
Side base / Front base Ø330mm



*See pages 416 and 418 for available codes of Side base and Front base.

3 YEARS WARRANTY

30.000 HOURS

IP 20

100/277 VAC

UGR <19

PF >0,9

 CRI ≥93

 38°

50/60 Hz

 +45°C
-20°C

 CCT SWITCH


 1/20





New

Cookie suspension

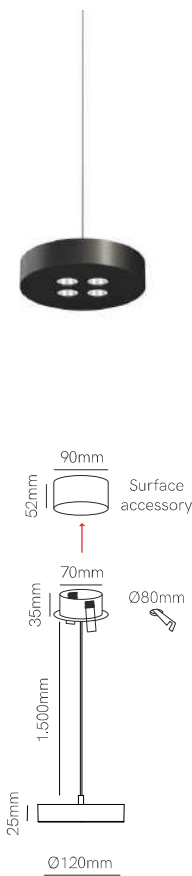

*Includes surface and recessed base.

Technical Information

Power	12W
Installation	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	985 lm
Material	Aluminium
Finishes	White / Black

Code	☐ 5183
	☒ 5184
	☒ Custom RAL




ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY	30.000 HOURS	IP 20	100/277 VAC	UGR <19	PF >0,9	CRI ≥90	38°	50/60 Hz	TRIAC DIMM	+40°C -20°C	CCT SWITCH	1/20
---------------------	-----------------	----------	----------------	------------	------------	------------	-----	-------------	------------	----------------	---------------	------



Bora suspension surface




Bora suspension recessed




Technical Information

Power	8,5W	8,5W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	530 lm / 540 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold
Code	☐ 2.700K 4605 ☐ 3.000K 4606 ☒ 2.700K 4607 ☒ 3.000K 4608 ☐ 2.700K 4609 ☐ 3.000K 4610 ☒ 2.700K 4611 ☒ 3.000K 4612	☐ 2.700K 4613 ☐ 3.000K 4614 ☒ 2.700K 4615 ☒ 3.000K 4616 ☐ 2.700K 4617 ☐ 3.000K 4618 ☒ 2.700K 4619




3 YEARS WARRANTY | 26,000 HOURS | IP 20 | 220/240 VAC | UGR <15 | PF >0,6 | CRI ≥93 | 36° | 50/60 Hz | +40°C / -20°C | 1/18

Bora recessed 4,5W



Bora recessed 8,5W



Technical Information

Version
Power
Installation
Color Temperature
Lumens
Material
Finishes

Bora recessed 4,5W
4,5W
Recessed
2.700K / 3.000K
290 lm / 300 lm
Aluminium
White / Black / Chrome / Rose gold

Bora recessed 8,5W
8,5W
Recessed
2.700K / 3.000K
530 lm / 540 lm
Aluminium
White / Black / Chrome / Rose gold

Code

☐	2.700K	4589
☐	3.000K	4590
☒	2.700K	4591
☒	3.000K	4592
☐	2.700K	4593
☐	3.000K	4594
☐	2.700K	4595
☐	3.000K	4596

☐	2.700K	4597
☐	3.000K	4598
☒	2.700K	4599
☒	3.000K	4600
☐	2.700K	4601
☐	3.000K	4602
☐	2.700K	4603
☐	3.000K	4604

UGR <10 | PF >0,5 | 38°


UGR <15 | PF >0,6 | 36°




3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC | CRI ≥93 | 50/60 Hz | +40°C -20°C | 1/18



Bora surface 4,5W



Bora surface 8,5W



Technical Information

Version	Bora surface 4,5W	Bora surface 8,5W
Power	4,5W	8,5W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	290 lm / 300 lm	530 lm / 540 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome / Rose gold	White / Black / Chrome / Rose gold

Code	☐	2.700K	4621	☐	2.700K	4629
	☐	3.000K	4622	☐	3.000K	4630
	☒	2.700K	4623	☒	2.700K	4631
	☒	3.000K	4624	☒	3.000K	4632
	☐	2.700K	4625	☐	2.700K	4633
	☐	3.000K	4626	☐	3.000K	4634
	☐	2.700K	4627	☐	2.700K	4635
	☐	3.000K	4628	☐	3.000K	4636
UGR <10 PF >0,5 38° 				UGR <15 PF >0,6 36° 		




3 YEARS WARRANTY | 26.000 HOURS | IP 20 | 220/240 VAC |  CRI ≥93 |  | 50/60 Hz |  +40°C / -20°C |  1/18



New

Alp surface



Technical Information

Power	4,5W
Installation	Surface
Color Temperature	2.700K / 3.000K
Lumens	220 lm
Material	Aluminium
Finishes	White / Black

Code	☐	2.700K	5357
	☐	3.000K	5358
	☒	2.700K	5360
	☒	3.000K	5361



3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

UGR <19

PF >0,5

CRI ≥90


36°

50/60 Hz


+40°C
-20°C

1/18

Zoe surface




Zoe recessed



Technical Information

Power	7W	7W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	360 lm / 370 lm	360 lm / 370 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2.700K 4803	☐ 2.700K 4799
	☐ 3.000K 4804	☐ 3.000K 4800
	☒ 2.700K 4805	☒ 2.700K 4801
	☒ 3.000K 4806	☒ 3.000K 4802
		





3 YEARS WARRANTY | 26,000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,5 |  CRI ≥90 | 38°  | 50/60 Hz |  +40°C -20°C |  1/36



Atmos slim 25



Atmos slim 45



*Need Tuya Smart App to work.



Technical Information

Power	6W	6W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Tuya 2,700K - 4,000K	Tuya 2,700K - 4,000K
Lumens	460 lm	460 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	☐ 4930 ☒ 4931 ☐ 4932 ☒ Custom RAL	☐ 4750 ☒ 4751 ☐ 4752 ☒ Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories



Gateway Wifi
4956 ☐




*See page 8 for Gateway additional info.


*All versions included surface base (mounted) and recessed base (not mounted).

3 YEARS WARRANTY | 30,000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥90 | 45° | 50/60 Hz | +50°C / -10°C | IK03 | tuya | 1/10

Atmos 25



Atmos 45



Technical Information

Power	7W	10W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1.100 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	☐ 4461 ☒ 4462 ☐ 4952 ☒ Custom RAL	☐ 4463 ☒ 4464 ☐ 4953 ☒ Custom RAL

1/8

1/4

ⓘ Consult delivery terms and conditions.


Accessories



Included with:
4461 / 4463



Included with:
4461 / 4462 / 4463 / 4464



*All versions included surface base (mounted) and recessed base (not mounted).



3 YEARS WARRANTY | 30,000 HOURS | IP 20 | 220/240 VAC | UGR <19 | PF >0,9 | CRI ≥80 | 15° 38° 60° | 50/60 Hz | +50°C -20°C | CCT SWITCH



Atmos 25 GU10



Atmos 45 GU10

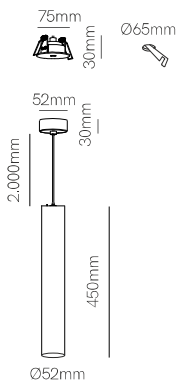

*All versions included surface base (mounted) and recessed base (not mounted).

Technical Information


Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black / Chrome	White / Black / Chrome
Code	☐ 4465 ☒ 4466 ☐ 4954 ☒ Custom RAL	☐ 4467 ☒ 4468 ☐ 4955 ☒ Custom RAL
	1/8	1/4




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20 | 220/240 VAC




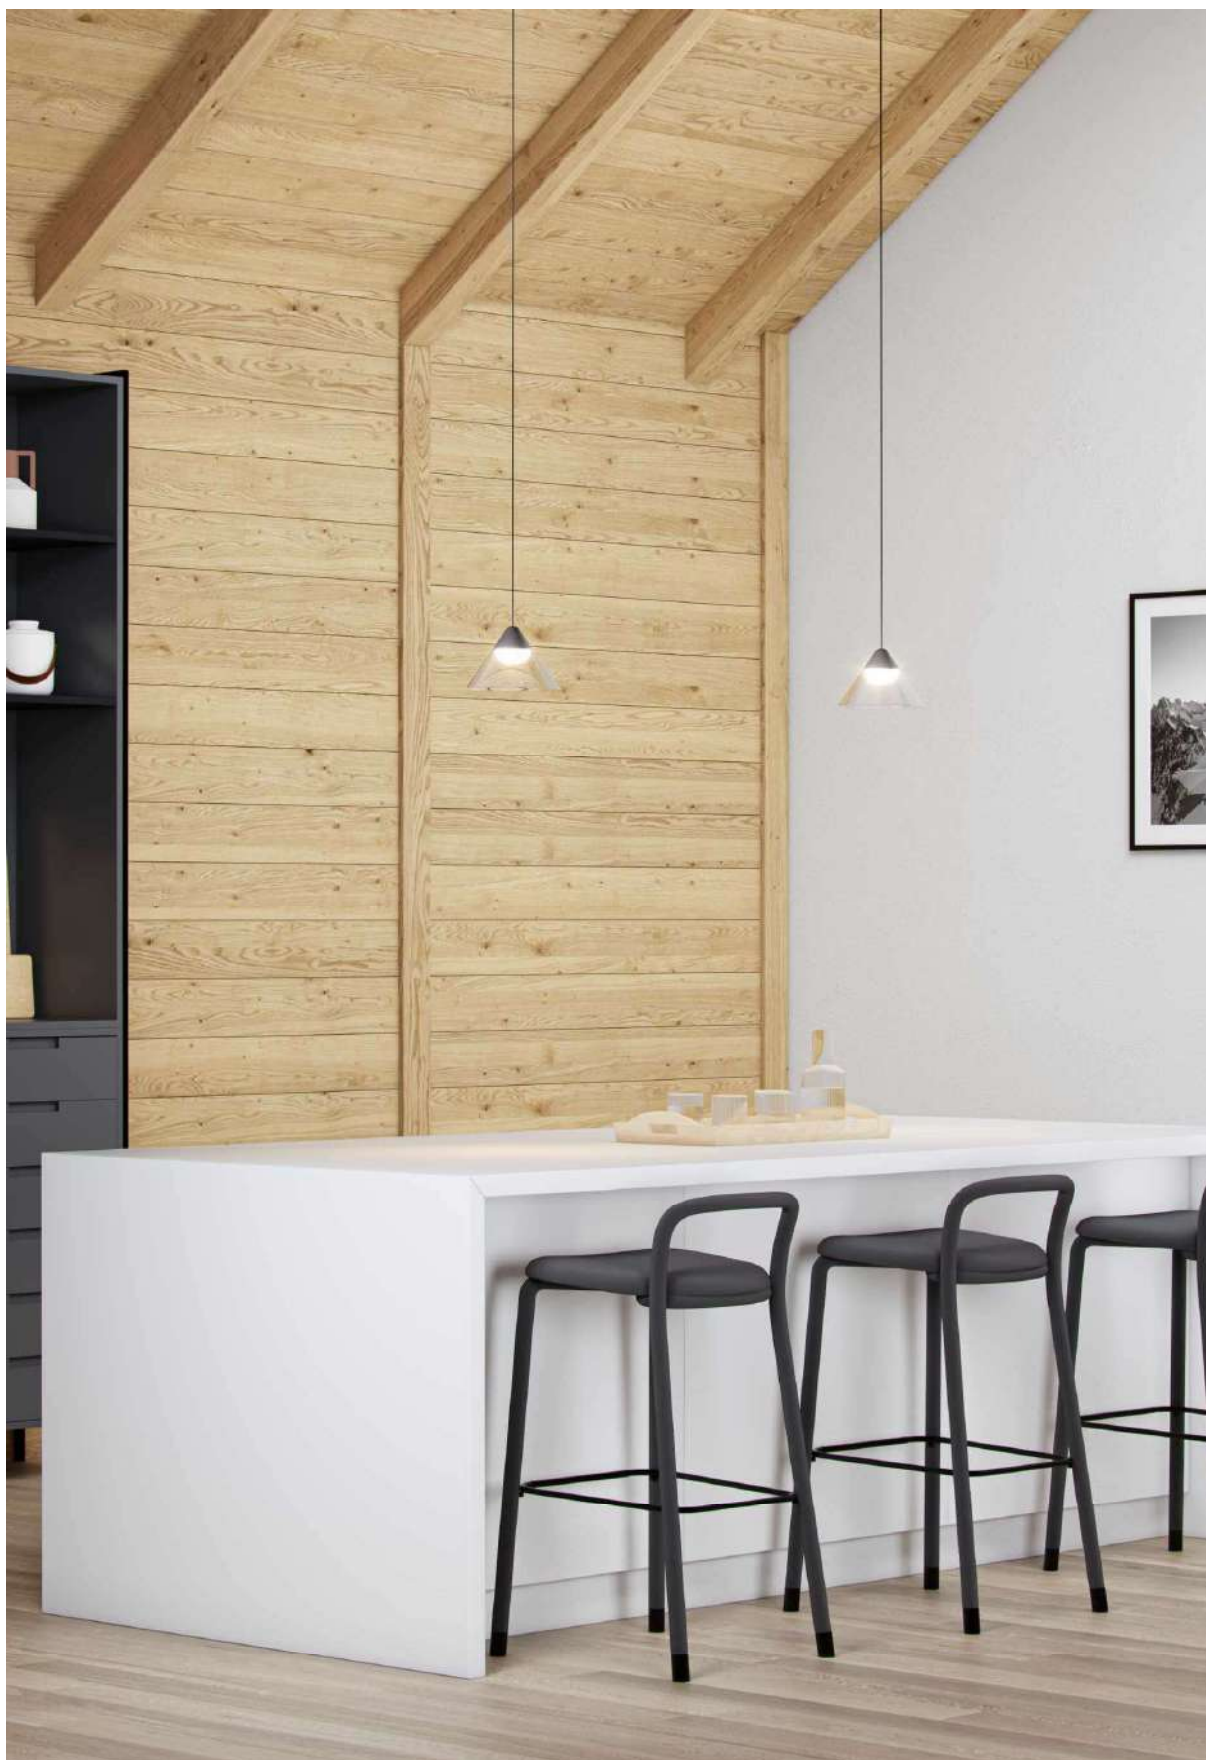

Ark surface



Ark recessed



Technical Information

Power	6W	6W
Installation	Surface	Recessed
Color Temperature	2.700K / 3.000K	2.700K / 3.000K
Lumens	350 lm / 360 lm	350 lm / 360 lm
Material	Aluminium and acrylic	Aluminium and acrylic
Finishes	White-transparent / Black-transparent / Black-gray	White-transparent / Black-transparent / Black-gray

Code	4814		White-transp. 2.700K	4808		White-transp. 2.700K
	4815		White-transp. 3.000K	4809		White-transp. 3.000K
	4816		Black-transp. 2.700K	4810		Black-transp. 2.700K
	4817		Black-transp. 3.000K	4811		Black-transp. 3.000K
	4818		Black-gray 2.700K	4812		Black-gray 2.700K
	4819		Black-gray 3.000K	4813		Black-gray 3.000K



3 YEARS WARRANTY

26.000 HOURS

IP 20

220/240 VAC

UGR <19



PF >0,5

50/60 Hz




New

Hat surface

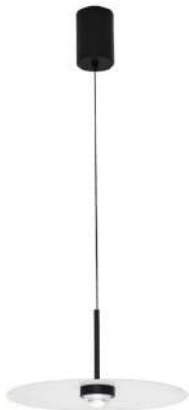

Hat recessed



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes

8W
Surface
2.700K / 3.000K
835 lm
Aluminium
White / Black

8W
Recessed
2.700K / 3.000K
835 lm
Aluminium
White / Black

Code

☐	2.700K	5345
☐	3.000K	5346
☒	2.700K	5348
☒	3.000K	5349



☐	2.700K	5351
☐	3.000K	5352
☒	2.700K	5354
☒	3.000K	5355





Volt round 1

Volt square 1

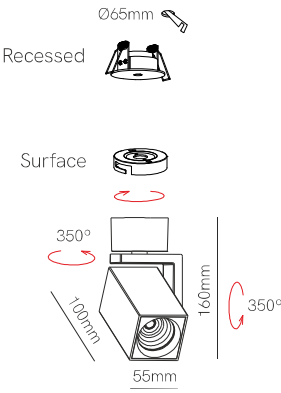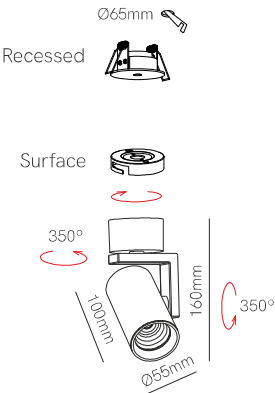

*Included surface base (mounted) and recessed base (not mounted).



Technical Information

Power	8W	8W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	570 lm	570 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5041 ☒ 5042 ① Custom RAL	☐ 5043 ☒ 5044 ① Custom RAL



① Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

→

IP 20

100/277 VAC

PF >0,9



38°

50/60 Hz

+45°C
-20°C

Volt round 3

Volt square 3



Technical Information

Power	24W	24W
Installation	Surface	Surface
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	1,700 lm	1,700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5045 ☒ 5046  Custom RAL	☐ 5047 ☒ 5048  Custom RAL

Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

→

IP 20

100/277 VAC

PF >0,9

38°



50/60 Hz

+45°C
-20°C



Volt round 1 GU10

Volt square 1 GU10

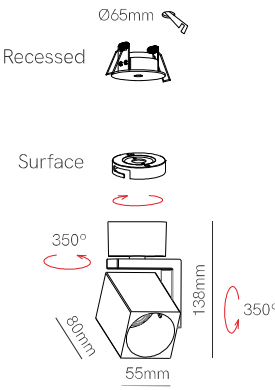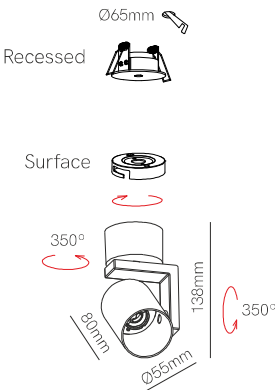

*Included surface base (mounted) and recessed base (not mounted).

Technical Information

Installation	Surface / Recessed	Surface / Recessed
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5049 ☒ 5050  Custom RAL	☐ 5051 ☒ 5052  Custom RAL



 Consult delivery terms and conditions.

3 YEARS WARRANTY

IP 20



 → 

 IK06

 1/20

Volt round 3 GU10

Volt square 3 GU10




Technical Information

Installation	Surface	Surface
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5053 ☒ 5054  Custom RAL	☐ 5055 ☒ 5056  Custom RAL




ⓘ Consult delivery terms and conditions.






Tot 40W



Tot 60W



*Need Tuya Smart App to work.



Technical Information


Power	40W	60W
Installation	Surface / Pendant	Surface / Pendant
Color Temperature	Tuya 2,600K - 4,000K	Tuya 2,600K - 4,000K
Lumens	3,400 lm	5,900 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black	White / Black
Code	☐ 4902	☐ 4904
	☒ 4903	☒ 4905
	 Custom RAL	 Custom RAL
	 Electrolytic Plating	 Electrolytic Plating

 Consult delivery terms and conditions.

Accessories



Gateway Wifi
4956 ☐



*See page 8 for Gateway additional info.
*Included recessed base (not mounted) and surface base (mounted).

3 YEARS WARRANTY

30,000 HOURS



IP 20

220/240 VAC

PF >0,9

CRI ≥80



115°

50/60 Hz



+50°C
-20°C







1



Rubyc dimmable

Rubyc



Technical Information

Power	14W	14W
Installation	Surface	Surface
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	1,205 lm	1,205 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 5069 ☒ 5070  Custom RAL	☐ 4230-N ☒ 4231-N  Custom RAL





ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30,000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥97 | 40° | 50/60 Hz | +40°C / -10°C | CCT SWITCH | AKZO NOBEL | 1/4/12

Mini rubyc dimmable

Mini rubyc



Technical Information


Power	7W	7W
Installation	Surface	Surface
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	850 lm	850 lm
Material	Aluminium	Aluminium
Finishes	White / Black	Black

Code	☐ 4332-N	☒ 4333
	☒ 4333-N	 Custom RAL
	 Custom RAL	




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | 30,000 HOURS | IP 20 | 220/240 VAC | PF >0,9 | CRI ≥80 |  40°    | 50/60 Hz |  +40°C -20°C |  CCT SWITCH | AKZO NOBEL |  1/30

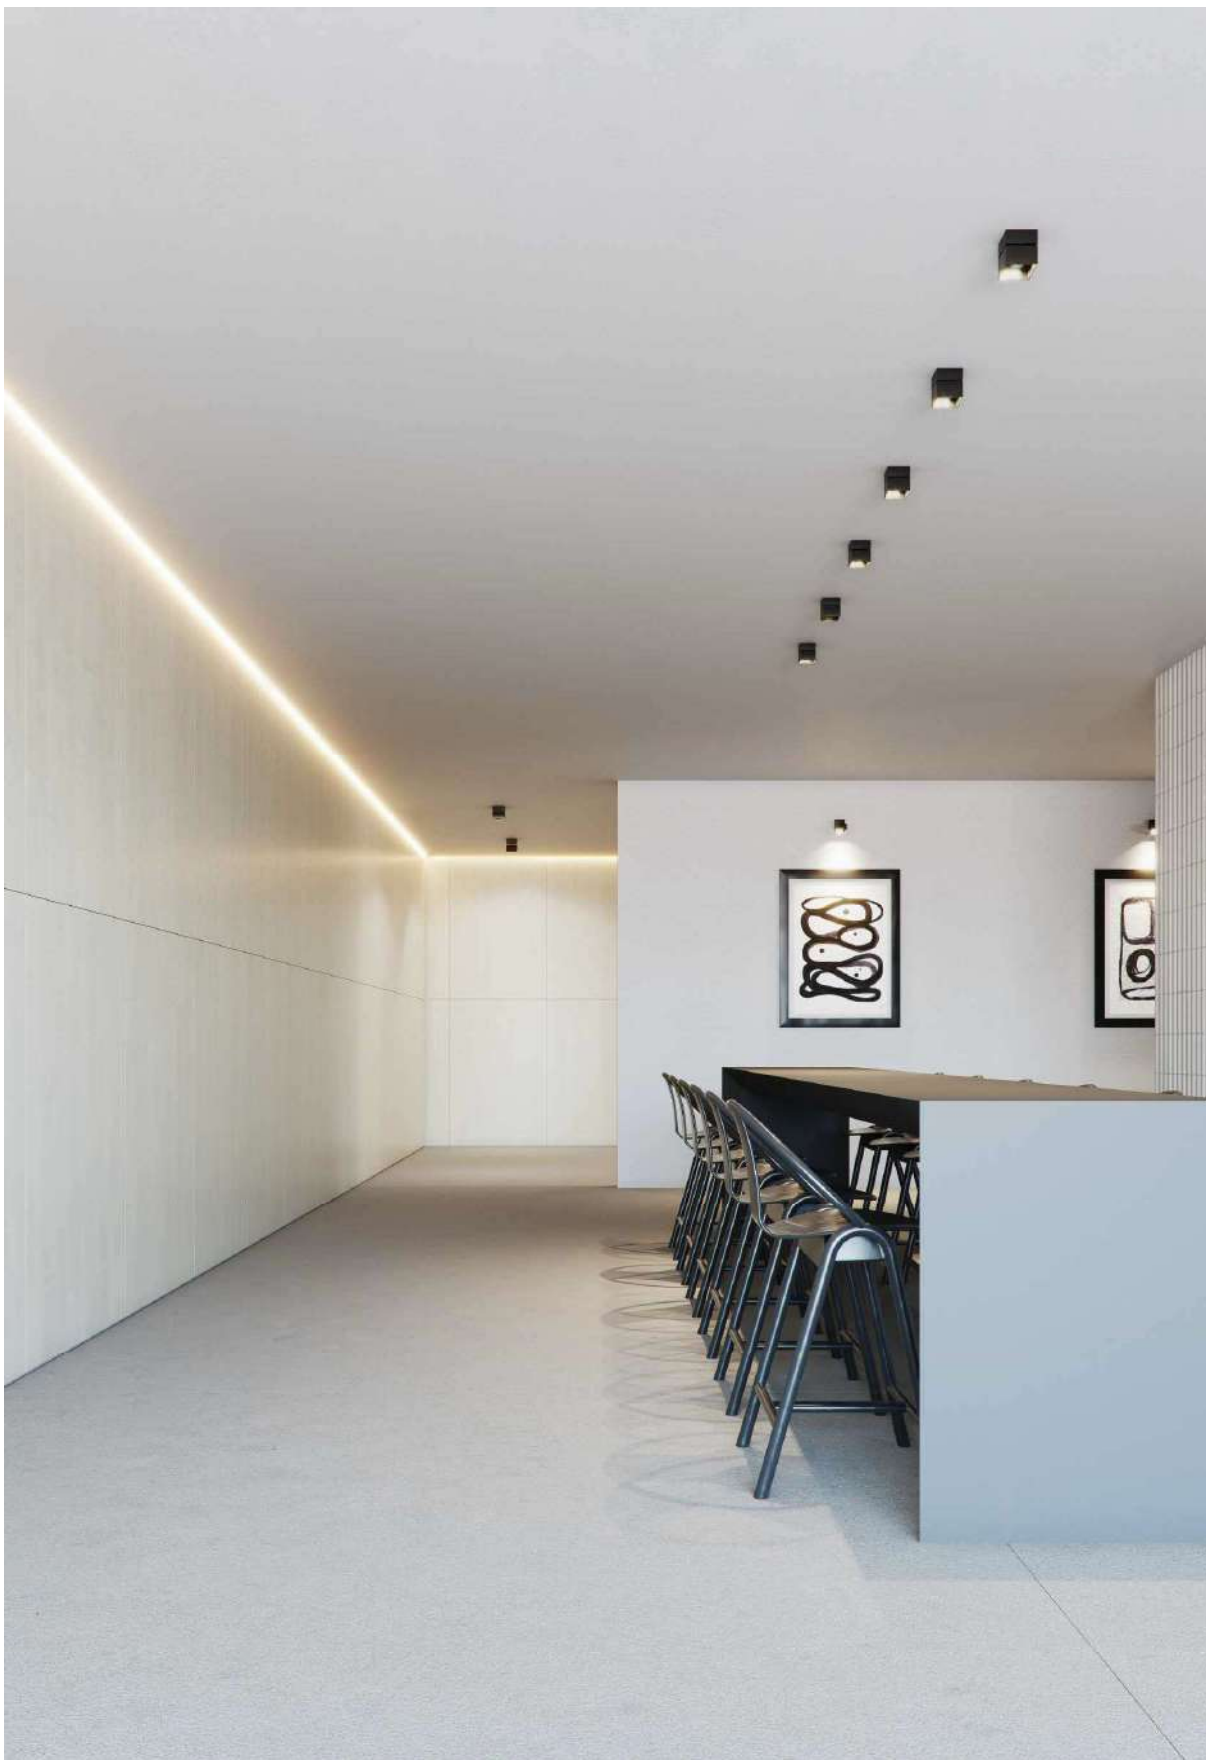



Concord dimmable



Technical Information


Power	14W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1,205 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5071
	☒ 5072
	☐ Custom RAL



Consult delivery terms and conditions.



Mini concord dimmable



Technical Information

Power	7W
Installation	Surface
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	850 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 4334-N ☒ 4335-N

Custom RAL

Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥80

40°

50/60 Hz

+40°C
-20°C

TRIAC DIMM

CCT SWITCH


AKZO NOBEL

1/30





Plus



Technical Information

Power	8W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	1,040 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 4522
	☐ 4523
	☒ Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥80

15° 35° 60°

50/60 Hz

+45°C -20°C


CCT SWITCH

1/20




New

Argo



Argo large




Argo flat



Technical Information

Power	3,5W	3,5W	2W
Installation	Recessed	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	125 lm	125 lm	80 lm
Material	Aluminium and acrylic	Aluminium and acrylic	Aluminium and acrylic
Finishes	White / Black	White / Black	White / Black
Code	☐ 2.700K 5246 ☐ 3.000K 5247 ☐ 4.000K 5248 ☒ 2.700K 5249 ☒ 3.000K 5250 ☒ 4.000K 5251	☐ 2.700K 5252 ☐ 3.000K 5253 ☐ 4.000K 5254 ☒ 2.700K 5255 ☒ 3.000K 5256 ☒ 4.000K 5257	☐ 2.700K 5258 ☐ 3.000K 5259 ☐ 4.000K 5260 ☒ 2.700K 5261 ☒ 3.000K 5262 ☒ 4.000K 5263




3 YEARS WARRANTY | 35,000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI >90 | 180° | 50/60 Hz | +40°C -20°C | 1/100




Mac wall 120mm



Mac wall 180mm



Mac wall 250mm



*Included 33mm base, optional 53mm base.

Technical Information

Power	6W	15W	20W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	600 lm	1.500 lm	2.000 lm
Material	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)	Aluminium + pc / Pc (wood)
Finishes	White / Black / Wood / Corten	White / Black / Wood / Corten	White / Black / Wood / Corten
Code	4995 4996 4997 5218 New Custom RAL	4998 4999 5000 5219 New Custom RAL	5001 5002 5003 5220 New Custom RAL

① Consult delivery terms and conditions.

Accessories New

53mm

Large base for 120mm

5226

5228

5227

5229

53mm

Large base for 180mm

5230

5232

5231

5233

53mm

Large base for 250mm

5234

5236

5235

5237



3 YEARS WARRANTY

25,000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

360°

50/60 Hz

IK06

TRIAC DIMM

+40°C


-20°C

CCT SWITCH


1/10



One wall



One wall dual



*GU10 Bulbholder included.



Technical Information

Installation
Material
Finishes
Bulbholder

Surface
Aluminium
White / Black / Corten
50mm GU10

Surface
Aluminium
White / Black / Corten
50mm GU10

Code

☐ 5006
☒ 5007
☐ 5008
 Custom RAL

☐ 5009
☒ 5010
☐ 5011
 Custom RAL



 Consult delivery terms and conditions.


3 YEARS
WARRANTY

| IP
20


|  1/20



Zio wall



Zio wall dual



*GU10 Bulbholder included.



Technical Information

Installation
Material
Finishes
Bulbholder

Surface
Aluminium
White / Black / Corten
50mm GU10

Surface
Aluminium
White / Black / Corten
50mm GU10

Code

☐	5012
☒	5013
☐	5014

Custom RAL

☐	5015
☒	5016
☐	5017

Custom RAL




Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20 | 1/20



Icon 7W



Icon 12W



Technical Information

Power	7W	12W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	770 lm	1,320 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	☐ 4383 ☒ 4384 ☐ 4385 Custom RAL	☐ 4386 ☒ 4387 ☐ 4388 Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

30,000
HOURS

IP
20

220/240
VAC

UGR
<14

PF
>0,5

CRI
≥90

120°

50/60
Hz

+50°C
-20°C


CCT
SWITCH

1/12



New

Tron



Technical Information

Power	8W / 16W / 24W
Lumens	720 lm - 2.400 lm
Installation	Wall
Material	Aluminium

Code	Diffuser	Size (X)	CCT (lm/W) - Power/m	Driver	Colour
Code 9	Opal 7	290mm 1	2,700K (60 lm/W) - 29W/m 2	Triac 4	White (9003) 1
		590mm 2	3,000K (65 lm/W) - 29W/m 3		Black (9005) 2
		870mm 3	4,000K (70 lm/W) - 29W/m 4		Custom RAL C

Code: 9 7 4



Consult delivery terms and conditions.


*Create your code according to your preferences.






New

Sphere wall



Sphere Alp wall



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes

9W
Surface
2.700K / 3.000K
465 lm
Aluminium and glass
White / Black

20W
Surface
2.700K / 3.000K
680 lm
Aluminium and glass
White / Black


Code

☐	2.700K	5333
☐	3.000K	5334
☒	2.700K	5336
☒	3.000K	5337

☐	2.700K	5339
☐	3.000K	5340
☒	2.700K	5342
☒	3.000K	5343

IP 54 | PF >0,6 | 360° |  | 

IP 20 | PF >0,9 | 360° |  | 




3 YEARS WARRANTY | 30.000 HOURS |  →  | 220/240 VAC | UGR <19 |  |  | 




New

Sweet usb-c



Sweet usb-a



Technical Information

Power	4W	4W
Installation	Surface	Surface
Color Temperature	2,700K	2,700K
Lumens	150 lm / 90 lm / 40 lm	150 lm / 90 lm / 40 lm
Material	Aluminium	Aluminium
Finishes	White / Black	Black
Code	☐ 5155 ☒ 5156	☒ 4175
	USB-C 5V 2A CRI ≥90	USB-A 5V 2A CRI ≥80





*Charger by induction and USB.






New

Beam



Technical Information

Power	5W
Installation	Surface
Color Temperature	2,700K
Lumens	380 lm / 190 lm / 95 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5157
	☒ 5158



*Charger by USB-C.

5 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥90

40°

50/60 Hz


USB-C 5V 2A

3 INTENSITIES

+40°C


-20°C

1/12

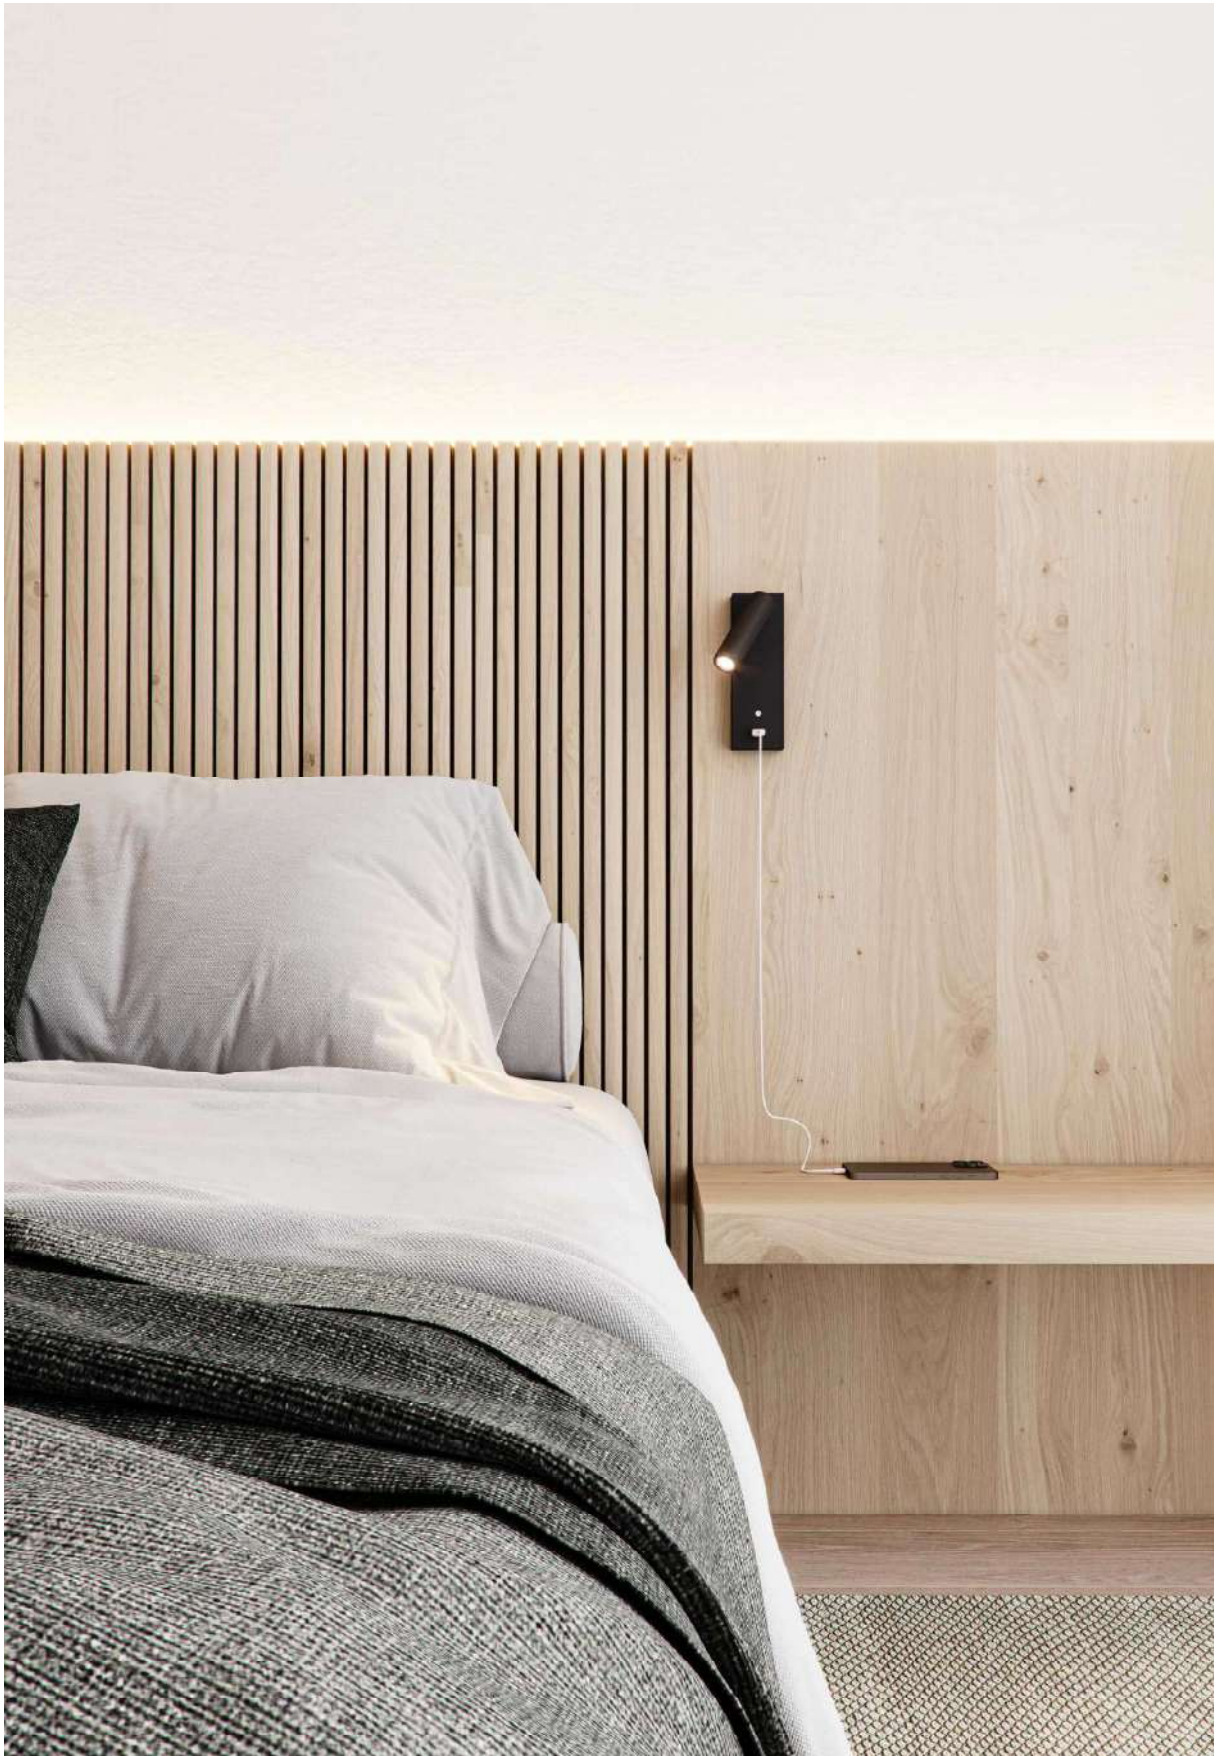

New

Pure



Technical Information

Power	4W
Installation	Surface
Color Temperature	2,700K
Lumens	155 lm / 80 lm / 40 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 5159 ☒ 5160



*Charger by USB.

3 YEARS WARRANTY

30,000 HOURS

IP 20

220/240 VAC

PF >0,5

USB-C 5V 2A

CRI ≥90

30°

50/60 Hz

3 INTENSITIES


+40°C -20°C

1/20



New

Oma



Technical Information

Power	8W
Installation	Surface
Color Temperature	3,000K
Lumens	144 lm
Material	Aluminium and glass
Finishes	White / Amber / Turquoise
Code	☐ 5381
	☐ 5382
	☐ 5383



3 YEARS WARRANTY

35,000 HOURS

IP 65



220/240 VAC

PF >0,9

50/60 Hz



Lao



Recessed box included
66mm x Ø73mm




White and black cover included




*Recessed box, white and black cover included.


Technical Information

Power	1,5W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	20 lm
Material	Aluminium
Finishes	White / Black
Code	☐ ☐ 5027
	☒ Custom RAL




ⓘ Consult delivery terms and conditions.



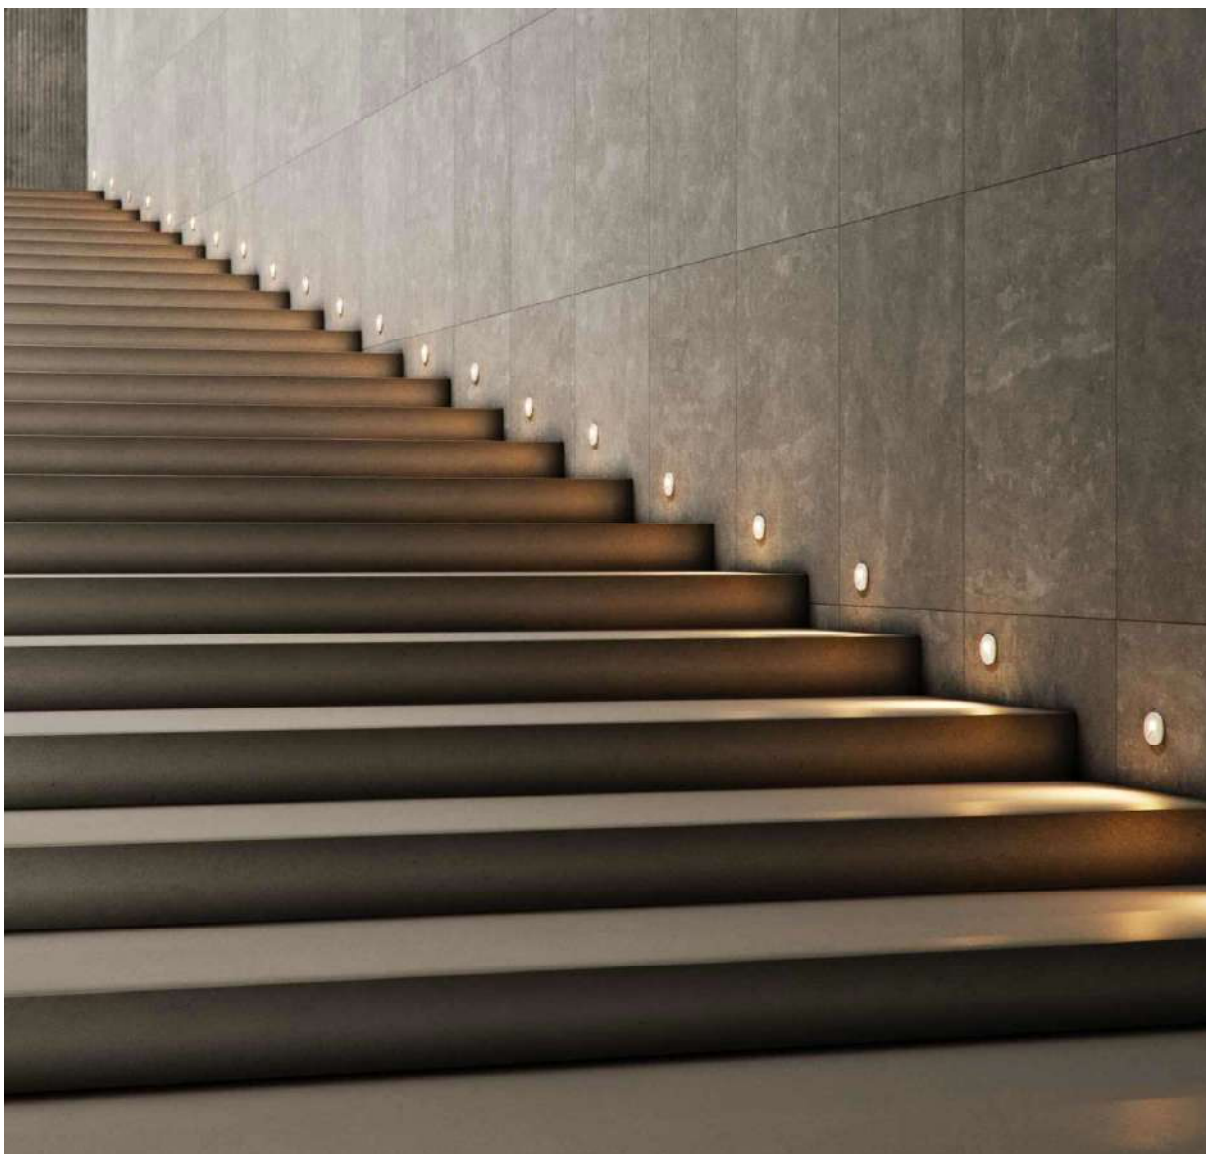

Pun

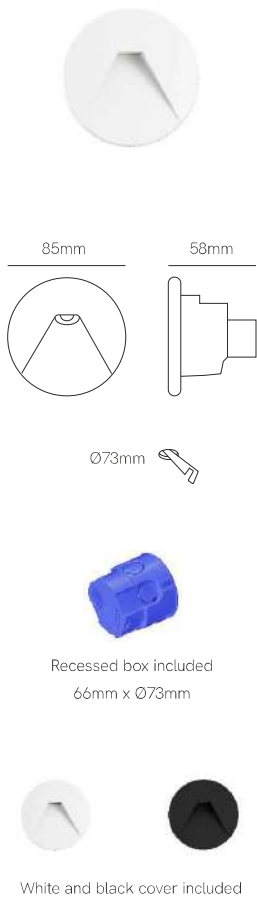

*Recessed box, white and black cover included.




Technical Information

Power	3W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	65 lm
Material	Aluminium
Finishes	White / Black
Code	☐ ☐ 5029
	☒ Custom RAL





ⓘ Consult delivery terms and conditions.





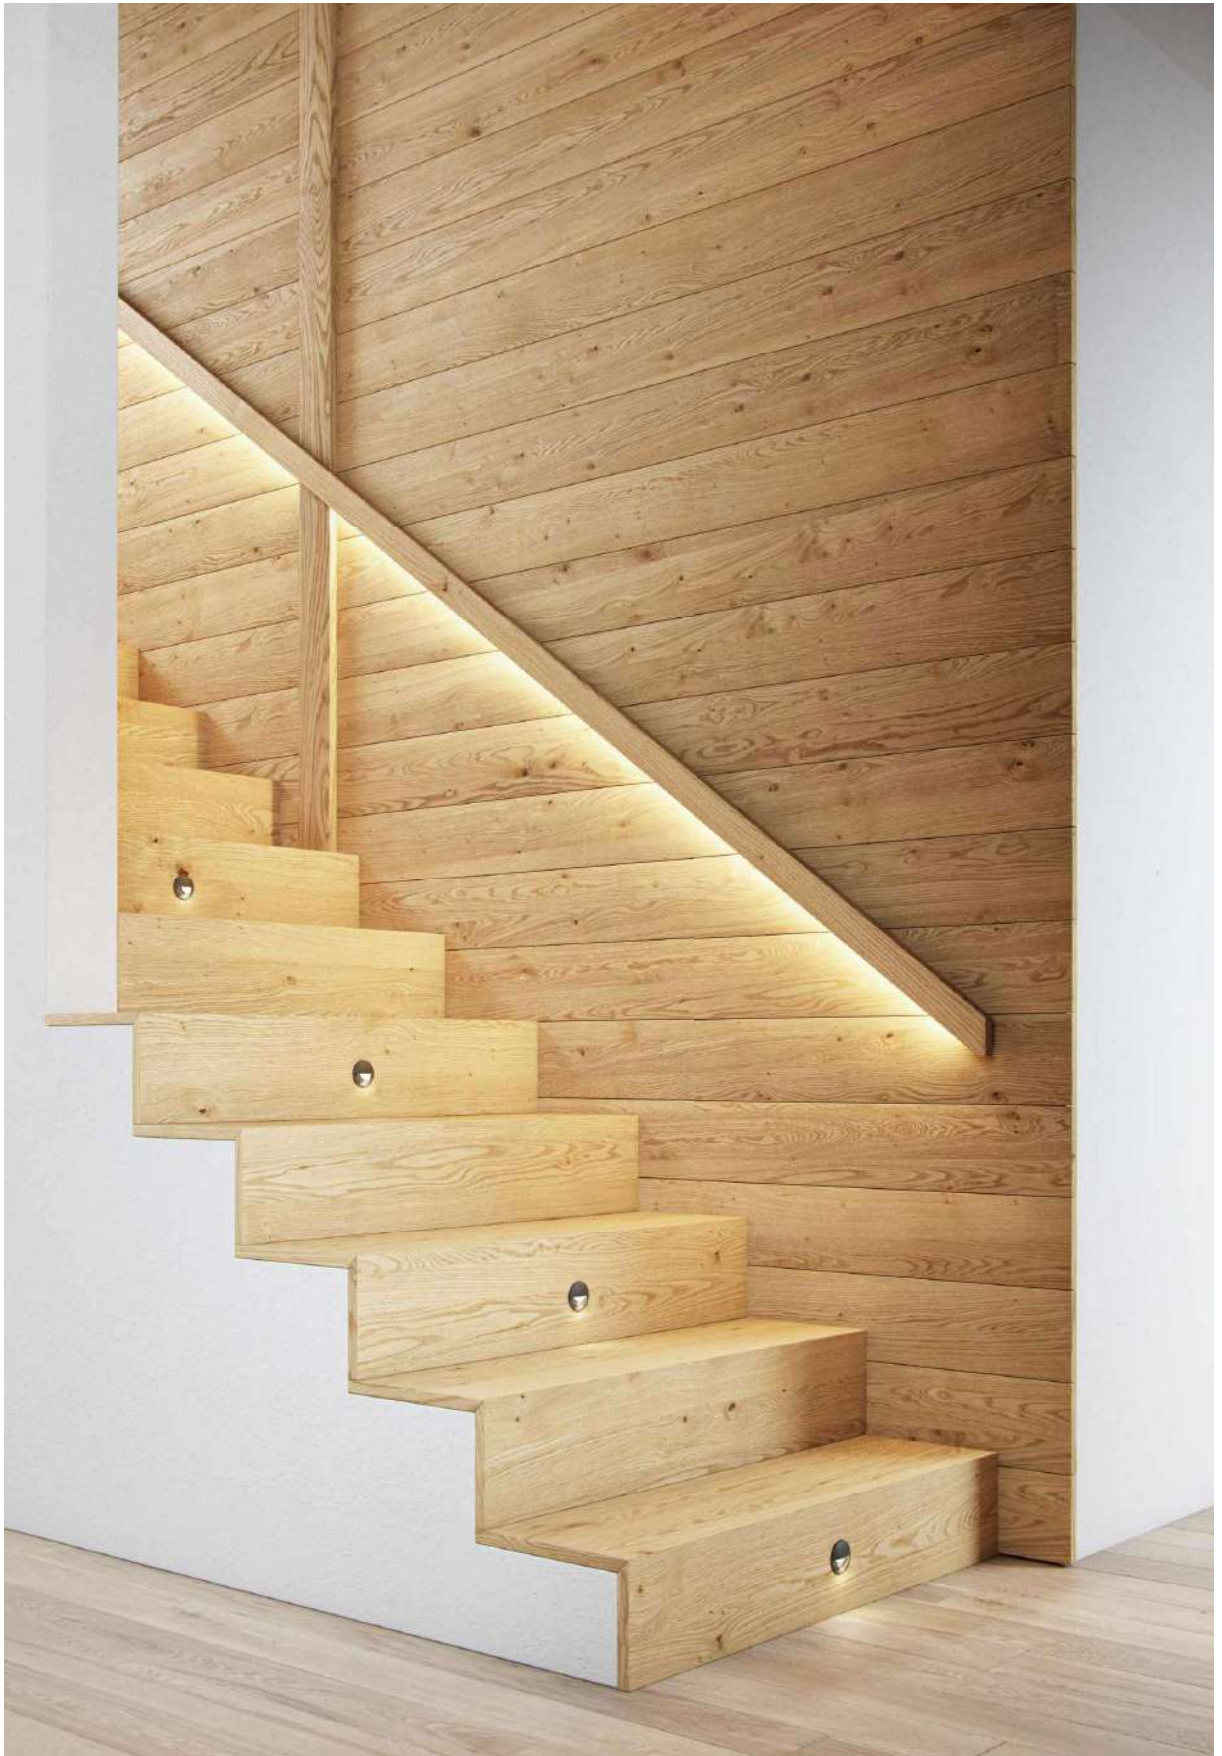

Ilo



Skin



*Recessed box included.



Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3,000K	3,000K
Lumens	60 lm	60 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 4126 ☒ 4127 ① Custom RAL	☐ 4108 ☒ 4109 ① Custom RAL





① Consult delivery terms and conditions.

3 YEARS WARRANTY | 25,000 HOURS | IP 20 | 220/240 VAC | PF >0,5 | CRI ≥80 | | 120° | 50/60 Hz | IK07 | +50°C / -20°C | 1/50

Port








Grow









Steps









*Recessed box included.

Technical Information

Power	4W	4W	4W
Installation	Recessed	Recessed	Recessed
Color Temperature	3.000K	3.000K	3.000K
Lumens	60 lm	60 lm	60 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black

Code	☐ 4112	☐ 4106	☐ 4110
	☒ 4113	☒ 4107	☒ 4111
	 Custom RAL	 Custom RAL	 Custom RAL
	120° 	120° 	120° 



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25,000 HOURS

IP 20

220/240 VAC

PF >0,5

CRI ≥80




50/60 Hz

 IK07


 +50°C
-20°C

 1/50

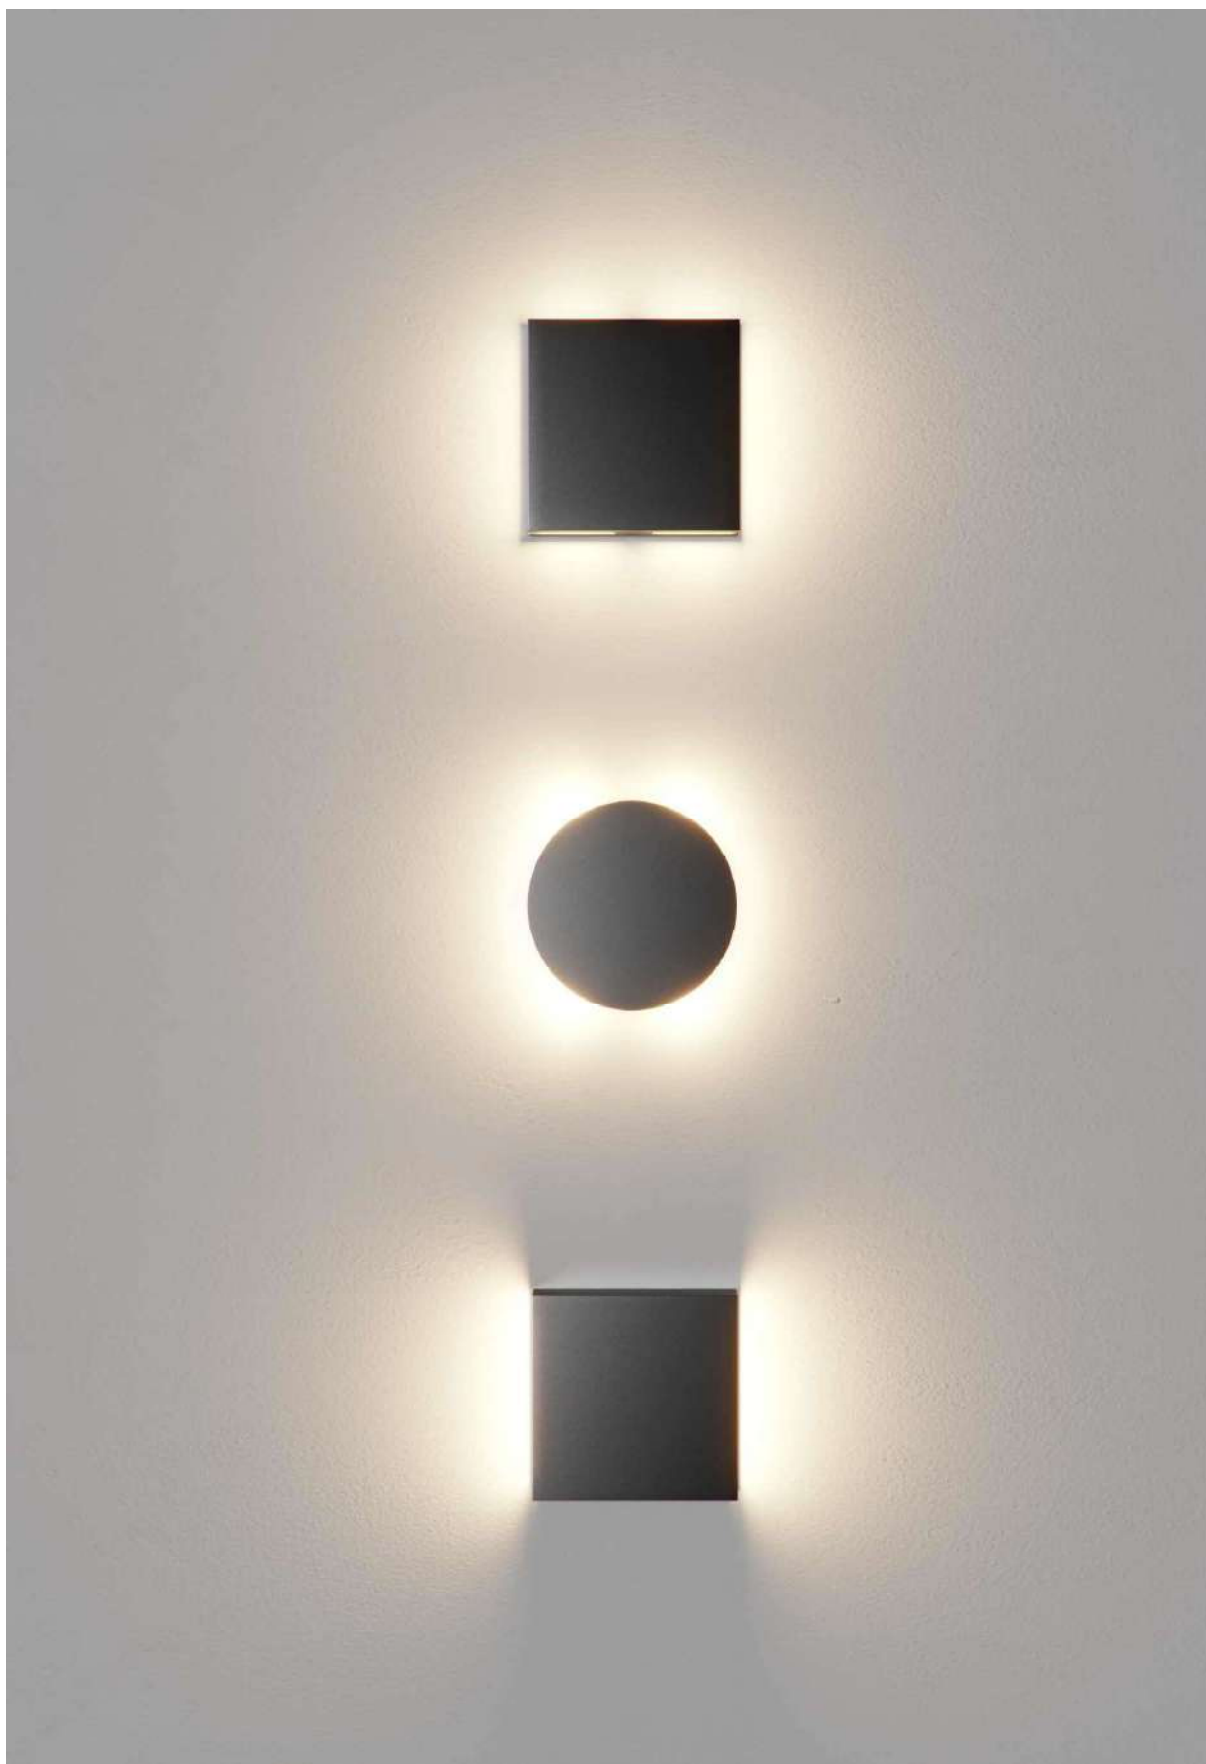



Stem



Technical Information

Power	5W
Installation	Desktop
Color Temperature	2.700K
Lumens	175 lm
Material	Aluminium and polycarbonate
Finishes	White / Black
Code	☐ 4979 ☒ 4981



3 YEARS
WARRANTY

30,000
HOURS

IP
20

220/240
VAC

PF
>0,45

CRI
≥90

30°

5W

50/60
Hz

IK06

+50°C
-20°C

1/20




► VIDEO



New

Bag



Technical Information

Power	2W
Installation	Portable
Color Temperature	3,000K
Lumens	50 lm
Material	Aluminium
Finishes	White / Black / Brushed Gold / Champagne
Code	☐ 5329 ☐ 5330 ☐ 5331 ☐ 5332



3 YEARS WARRANTY
BATTERY 2 YEARS

30,000 HOURS

2,5 HOURS

3,5 HOURS

USB-C 5V

1.800 mAh

IP 20

CRI ≥90

180°

DIMMABLE

IK06


+40°C
-20°C

1/20



New

Bimba



Technical Information

Power	2W
Installation	Portable
Color Temperature	Switch 2.000K/ 3.100K / 5.000K
Lumens	118 lm
Material	Aluminium
Finishes	White / Brushed Gold / Champagne
Code	☐ 5325 ☐ 5327 ☐ 5328



3 YEARS WARRANTY BATTERY 1 YEARS

9.000 HOURS

3,5 HOURS

5 HOURS

USB-C 5V

3.000 mAh

IP 65

CRI ≥80

110°

DIMMABLE

IK04


+40°C -20°C

CCT SWITCH


1/8





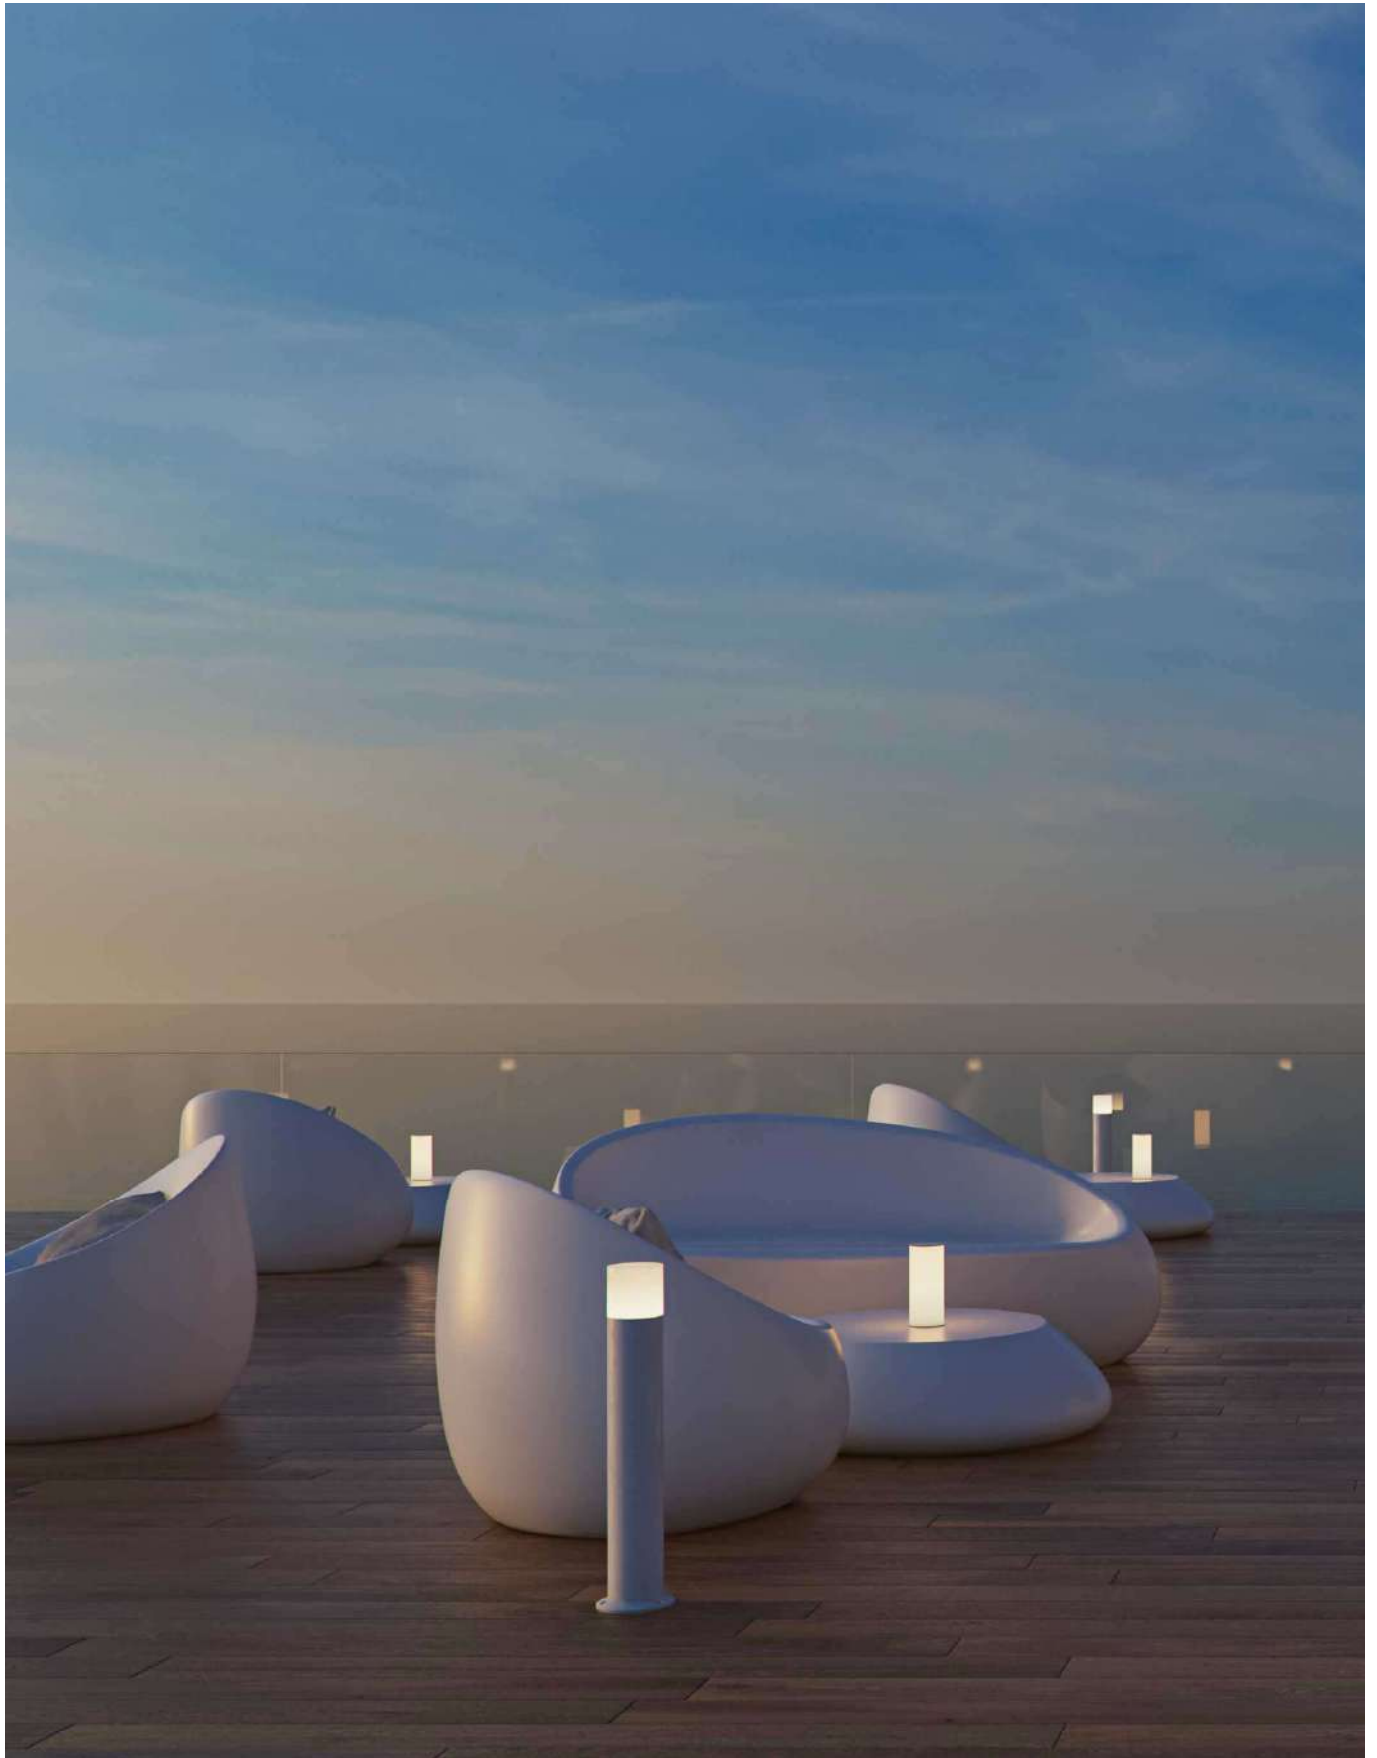



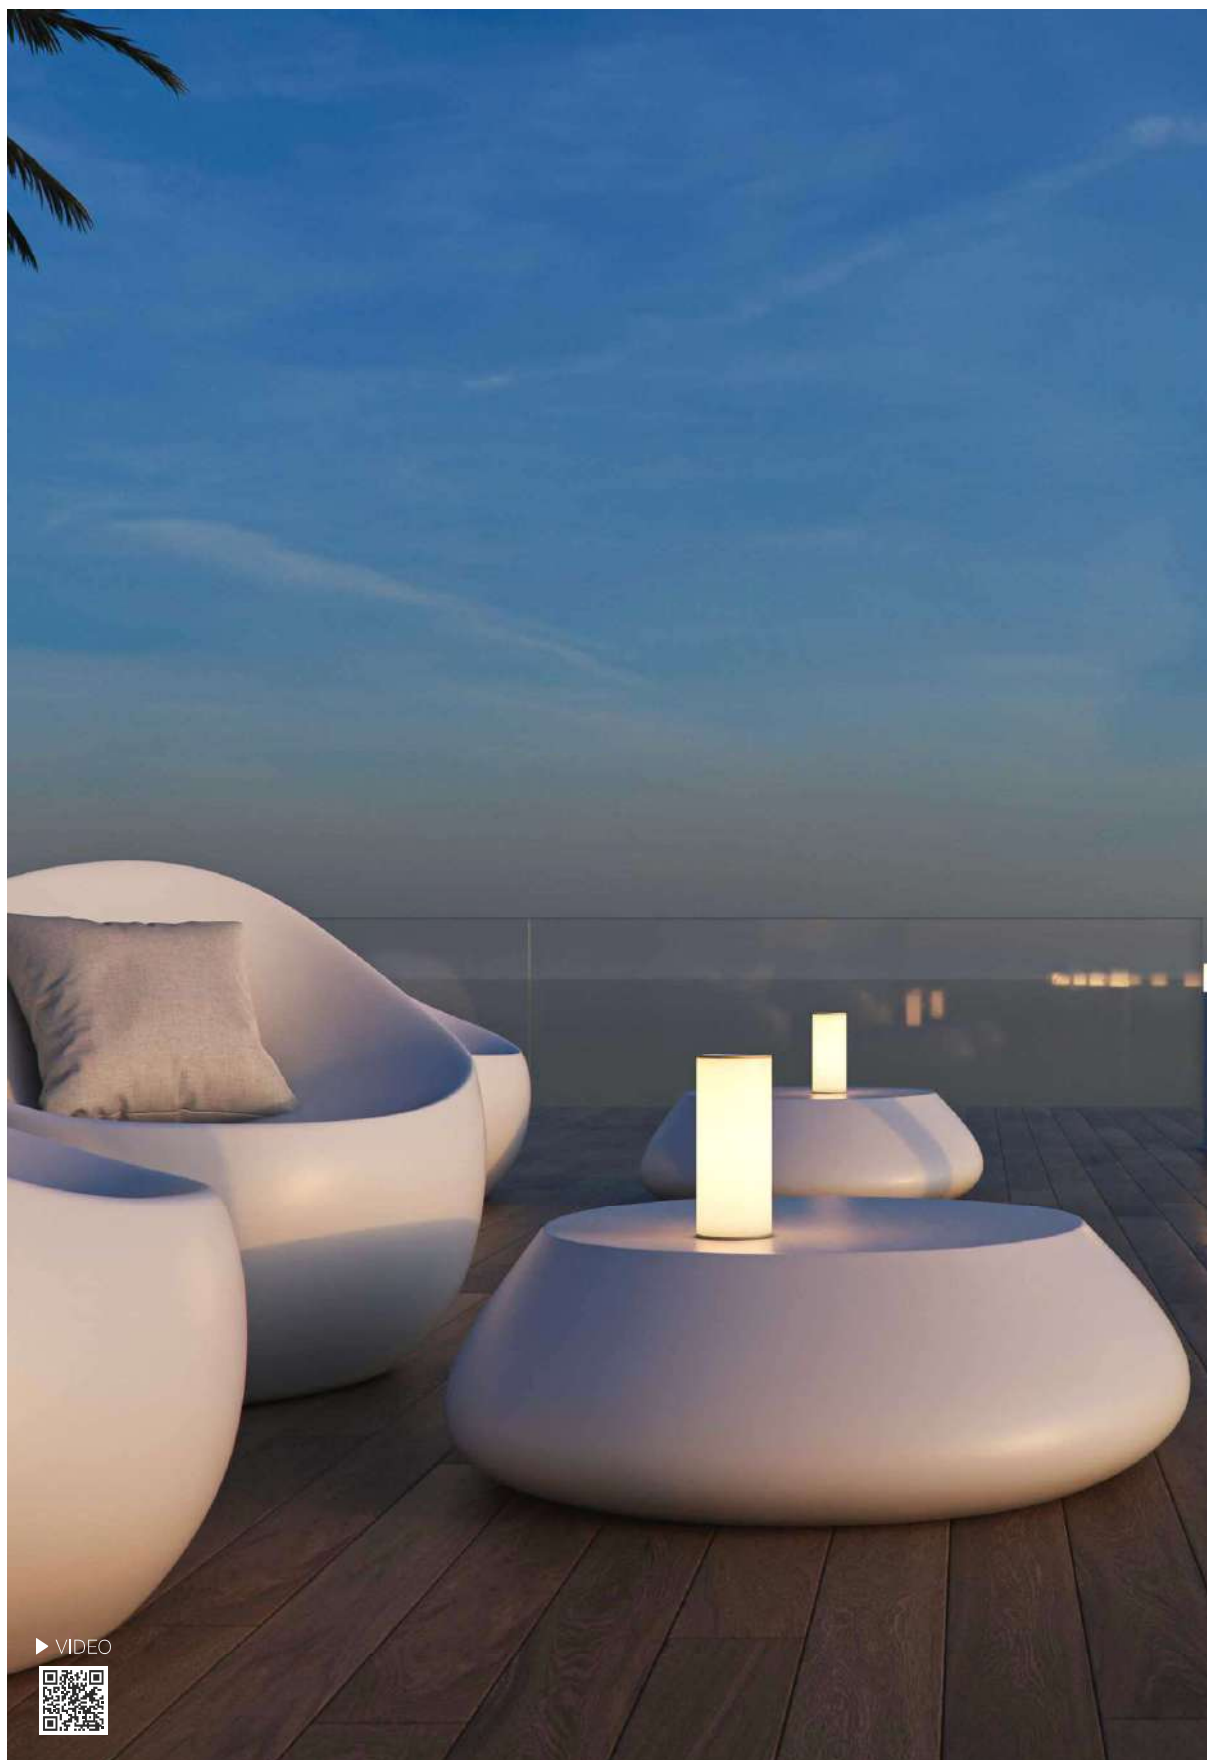

Converse lighting



Technical Information

Power	2,5W
Installation	Portable
Color Temperature	2.700K / 5.000K
Lumens	225 lm
Finishes	White
Code	☐ 3916-N



3 YEARS WARRANTY BATTERY 2 YEARS

50,000 HOURS

5-6 HOURS

4-150 HOURS

MICRO USB 5V

2,200 mAh

IP 20

CRI ≥82

360°

DIMMABLE

+40°C -20°C

1/15




Downlights



Kora round 20W

Kora round 25W



Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	2,400 lm	3,000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 4832	☐ 4500-V2



3 YEARS WARRANTY

25,000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80

120°

50/60 Hz




IK08

+45°C
-25°C

CCT SWITCH


Kora square 20W

Kora square 25W

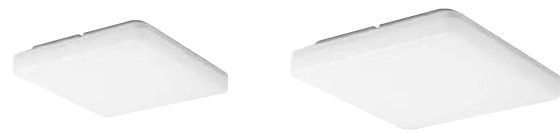

Technical Information

Power	20W	25W
Installation	Surface	Surface
Color Temperature	Switch 2,700K / 3,200K / 4,000K	Switch 2,700K / 3,200K / 4,000K
Lumens	2,400 lm	3,000 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 4831	☐ 4499-V2



3 YEARS WARRANTY

25,000 HOURS

IP 40

220/240 VAC

PF >0,9

CRI ≥80

120°

50/60 Hz

IK08


+45°C
-25°C

CCT SWITCH







Thessis 15W



Thessis 25W



Thessis 35W



Technical Information

Power	15W	25W	35W
Installation	Recessed	Recessed	Recessed
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1,300 lm	2,625 lm	3,100 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White / Black	White / Black	White
Code	☐ 4766	☐ 4236	☐ 5030
	☒ 4987	☒ 4988	☒ Custom RAL
	☒ Custom RAL	☒ Custom RAL	
UGR <19		UGR <19	



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25,000 HOURS

→

IP 40

220/240 VAC

PF >0,9

CRI ≥85

90°

50/60 Hz



+40°C
-20°C

CCT SWITCH

1/6

Thessis 15W dimmable

Thessis 25W dimmable



Technical Information

Power	15W	25W
Installation	Recessed	Recessed
Color Temperature	Switch 3,000K / 4,000K / 5,000K	Switch 3,000K / 4,000K / 5,000K
Lumens	1,300 lm	2,625 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 4767 Custom RAL	☐ 4691 Custom RAL



Consult delivery terms and conditions.

3 YEARS WARRANTY

25,000 HOURS

→

IP 40

220/240 VAC

UGR <19

PF >0,9

CRI ≥85

90°

50/60 Hz

IK06

TRIAC DIMM

+40°C
-20°C


CCT SWITCH

1/6





Air switch



Technical Information

Power	22W
Installation	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	2.200 lm
Material	Polybutylene and Polycarbonate
Finishes	White
Code	☐ 5018



3 YEARS WARRANTY

25.000 HOURS

 → 

IP 40

100/277 VAC

PF >0,9

CRI ≥80



100°



50/60 Hz





+40°C

-20°C

CCT SWITCH





1/6



Noi switch

Noi dimmable



Technical Information

Power	14W	14W
Installation	Recessed	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm	1.100 lm / 1.320 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 5019	☐ 3.000K 3485 ☐ 4.000K 3486

100/277 VAC | OCT SWITCH

220/240 VAC | TRIAC DIMM





3 YEARS WARRANTY | 25,000 HOURS |  →  | IP 40 | PF >0,9 | CRI ≥80 |  100° | 50/60 Hz |  +40°C -20°C |  1/6



Compac round



Compac square



Technical Information

Power	8W	8W
Installation	Recessed	Recessed
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	594 lm / 607 lm / 660 lm	594 lm / 607 lm / 660 lm
Material	Polybutylene and Polycarbonate	Polybutylene and Polycarbonate
Finishes	White	White
Code	☐ 2.700K 3951 ☐ 3.000K 3952 ☐ 4.000K 3953 Custom RAL	☐ 2.700K 3948 ☐ 3.000K 3949 ☐ 4.000K 3950 Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25,000 HOURS

IP 44

220/240 VAC

PF >0,5

CRI ≥80

90°

50/60 Hz

TRIAC DIMM

+40°C

-20°C

1/6/30



Industrial lighting

New

Ufo Lens switch
60W / 80W / 100W



Ufo Lens switch
90W / 120W / 150W



Technical Information

Power	Switch 60W / 80W / 100W	Switch 90W / 120W / 150W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	131-167 lm/W	128-167 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	■ 5147	■ 5148

Accessories



New

Ufo Lens switch
120W / 160W / 200W


Ufo Lens switch
140W / 190W / 240W




Technical Information

Power	Switch 120W / 160W / 200W	Switch 140W / 190W / 240W
Installation	Surface	Surface
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	123-169 lm/W	125-156 lm/W
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	■ 5149	■ 5150


Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567







Ufo Lens Dali 100W


Ufo Lens Dali 150W




Technical Information

Power	100W	150W
Installation	Surface	Surface
Color Temperature	4,000K / 5,000K	4,000K / 5,000K
Lumens	16,000 lm / 16,200 lm	24,000 lm / 24,200 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	■ 4,000K 4915	■ 4,000K 4917
	■ 5,000K 4916	■ 5,000K 4918


Accessories



Lira 100W/150W/200W
■ 4566



Lira 240W
■ 4567



5 YEARS WARRANTY

50,000 HOURS

IP 65

100/260 VAC

PF >0,9

CRI ≥80

CABLE 2M

60° 90° 120°

50/60 Hz

+50°C -30°C

>4KV

1

Ufo Lens Dali 200W



Ufo Lens Dali 240W



Technical Information

Power	200W	240W
Installation	Surface	Surface
Color Temperature	4,000K / 5,000K	4,000K
Lumens	32.000 lm / 32.200 lm	38.400 lm
Material	Aluminium	Aluminium
Finishes	Black	Black
Code	■ 4,000K 4919 ■ 5,000K 4920	■ 4,000K 4921

Accessories





Rotable Lens



Ufo lens 100W

1m	5m	11m
9.113 lx	365 lx	75 lx

Ufo lens 150W

1m	7m	14m
13.670 lx	279 lx	70 lx

Ufo lens 200W

1m	8m	16m
18.226 lx	225 lx	71 lx

Ufo lens 240W

1m	9m	19m
26.635 lx	329 lx	74 lx



90°



1m	5m	10m
7.867 lx	315 lx	79 lx

1m	6m	13m
11.800 lx	328 lx	70 lx

1m	7m	15m
15.733 lx	321 lx	70 lx

1m	9m	19m
26.654 lx	292 lx	73 lx

120°



1m	5m	10m
6.638 lx	266 lx	66 lx

1m	6m	12m
9.956 lx	277 lx	69 lx

1m	7m	14m
13.275 lx	271 lx	68 lx

1m	9m	19m
15.882 lx	324 lx	68 lx







Light output

1m	7m	14m
14.401 lx	294 lx	73lx

Ufo 300W




Technical Information

Power	300W
Installation	Surface
Color Temperature	4,000K
Lumens	39.000 lm
Material	Aluminium
Finishes	Gray
Code	4,000K 3972


CE RoHS

*Lira included.

5 YEARS WARRANTY | 50,000 HOURS | → | IP 65 | 100/260 VAC | PF >0,9 | CRI ≥80 | | CABLE 2M | 110° | 50/60 Hz | IK10 | +50°C -30°C | >4KV | 1

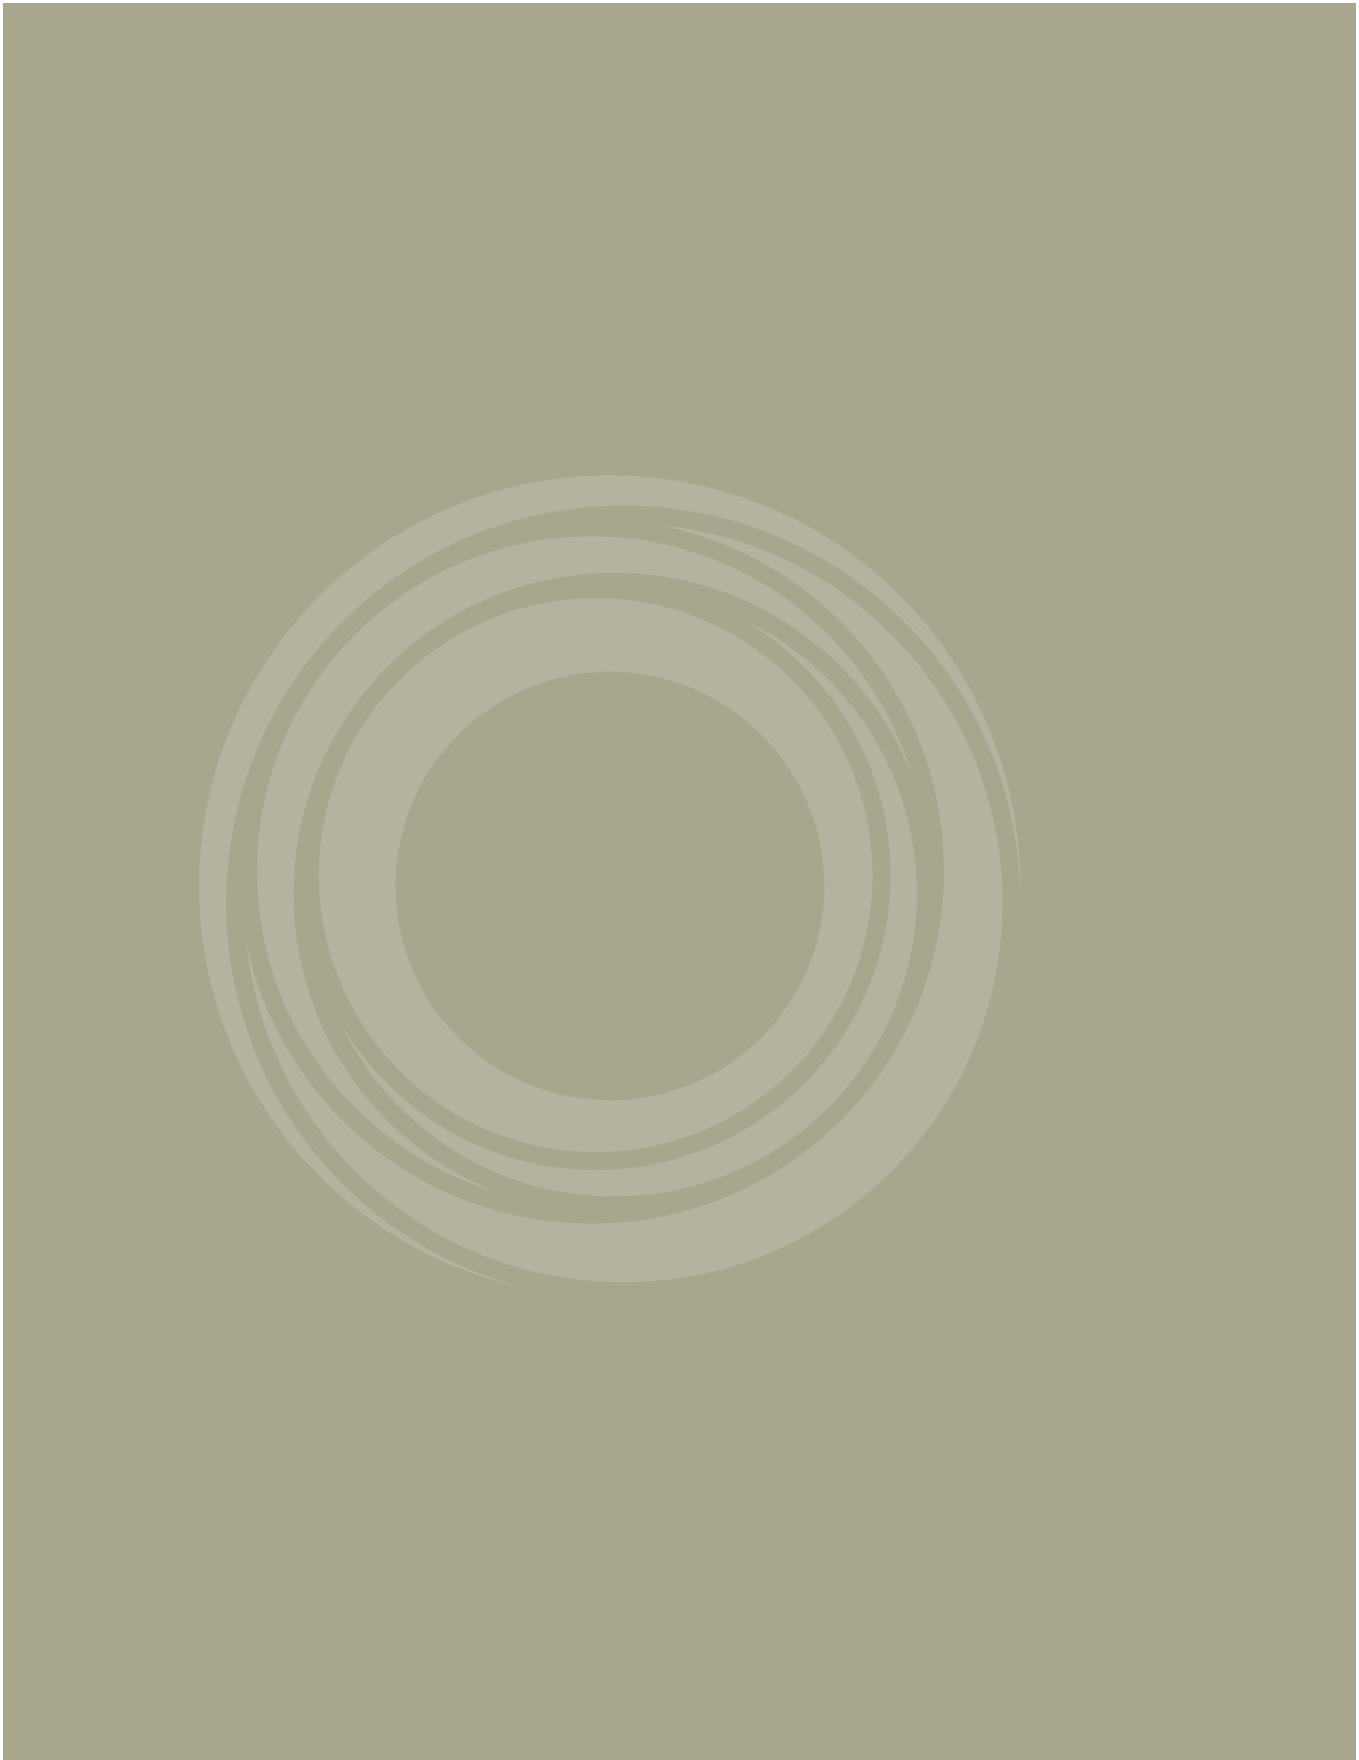

Outdoor lighting


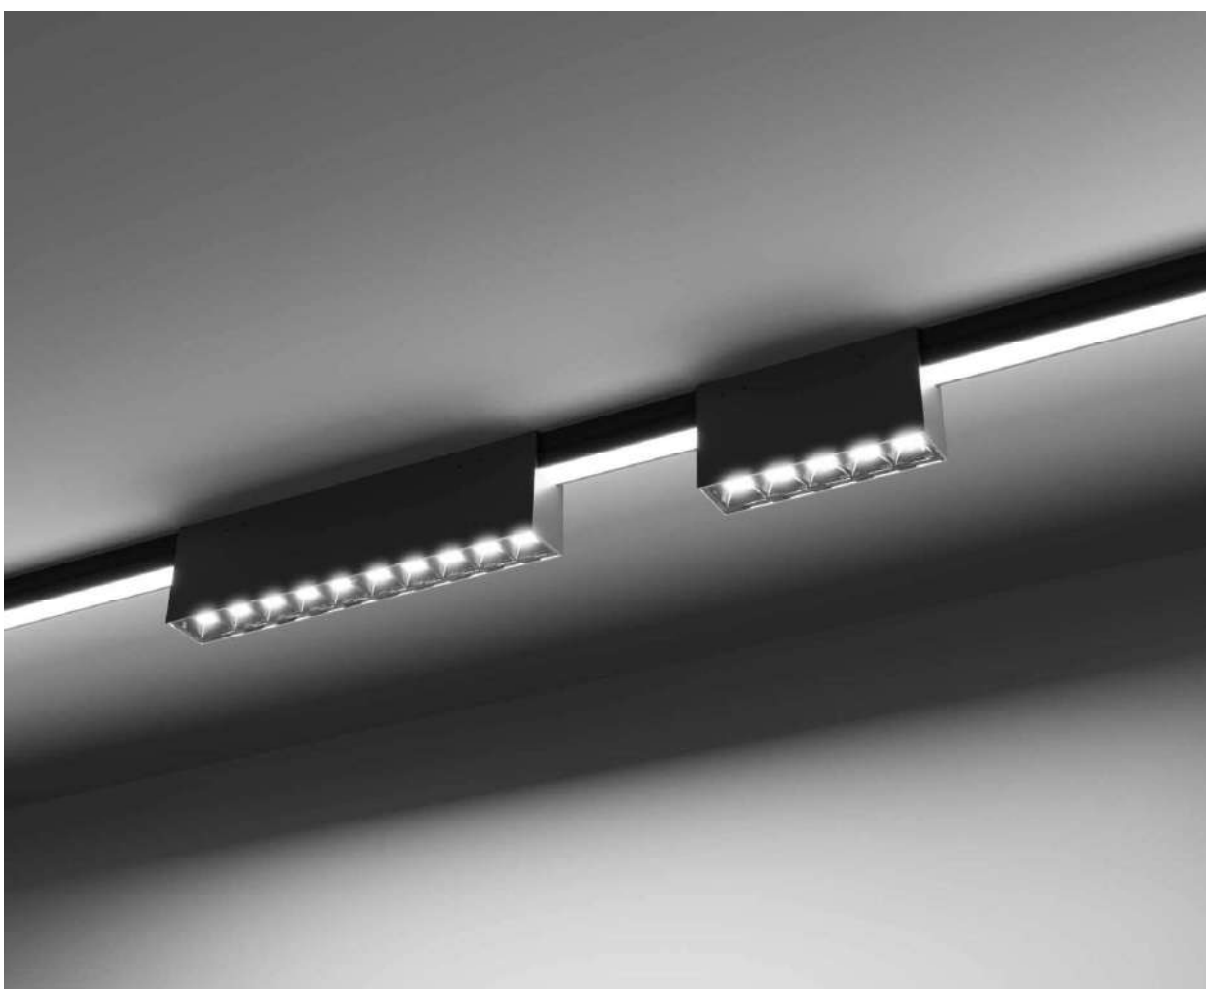


New

Ice 5



Ice 10




*Need power supply (page 408).



Technical Information

Power	10W	20W
Installation	Outdoor Track	Outdoor Track
Color Temperature	2,700K / 3,000K	2,700K / 3,000K
Lumens	685 lm	1,110 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 2,700K 5384 ☐ 3,000K 5385 ☒ 2,700K 5386 ☒ 3,000K 5387 1/40	☐ 2,700K 5388 ☐ 3,000K 5389 ☒ 2,700K 5390 ☒ 3,000K 5391 1/20



New

Atmos track



*Need power supply (page 408).

Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	510 lm
Material	Aluminium
Finishes	White / Black

Code	☐	2.700K	5392
	☐	3.000K	5393
	☒	2.700K	5394
	☒	3.000K	5395



3 YEARS WARRANTY

30.000 HOURS

IP 65

48V DC

UGR <19

CRI ≥90

38°


IK06

+45°C
-20°C

1/20

New

Bit




*Need power supply (page 408).



Technical Information

Power	8W
Installation	Outdoor Track
Color Temperature	2.700K / 3.000K
Lumens	630 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 2.700K5396 ☐ 3.000K5397

☒☒

3 YEARS
WARRANTY

30.000
HOURS

IP
65

48V
DC

UGR
<19

CRI
≥90

III

55°


IK06

+45°C

-20°C

1/20


New

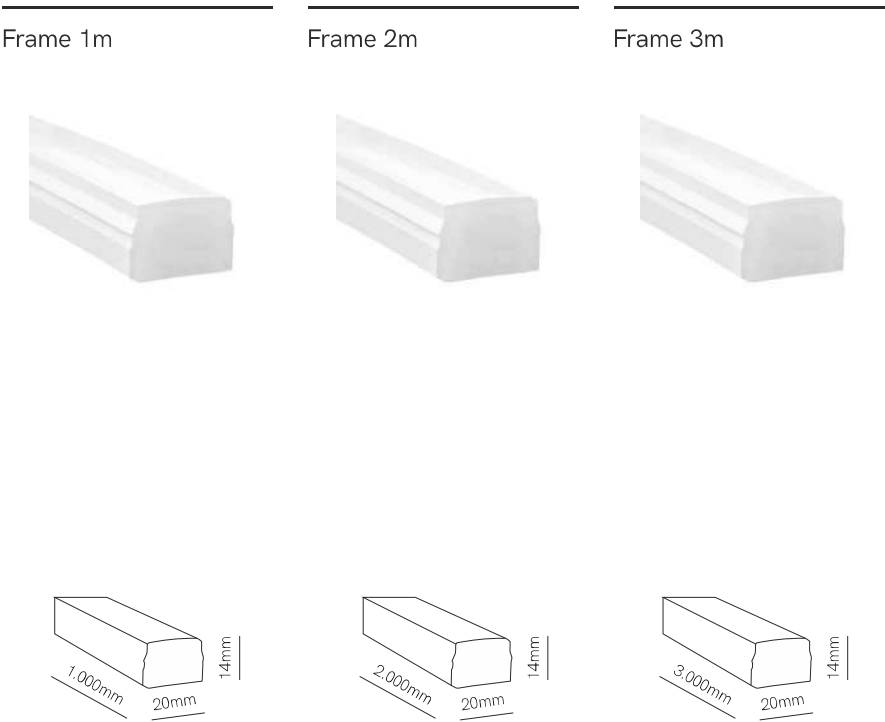

*Need power supply (page 408).

Technical Information

Power	10W	20W	30W
Installation	Outdoor Track	Outdoor Track	Outdoor Track
Color Temperature	2,700K / 3,000K	2,700K / 3,000K	2,700K / 3,000K
Lumens	680 lm	1,400 lm	2,055 lm
Material	Silicone	Silicone	Silicone
Code	☐ 2,700K 5400	☐ 2,700K 5402	☐ 2,700K 5404
	☐ 3,000K 5401	☐ 3,000K 5403	☐ 3,000K 5405



3 YEARS WARRANTY

30,000 HOURS

IP 65

48V DC

CRI ≥90



100°



125mm





IK06






+45°C
-20°C



1/15

Outdoor track accessories New

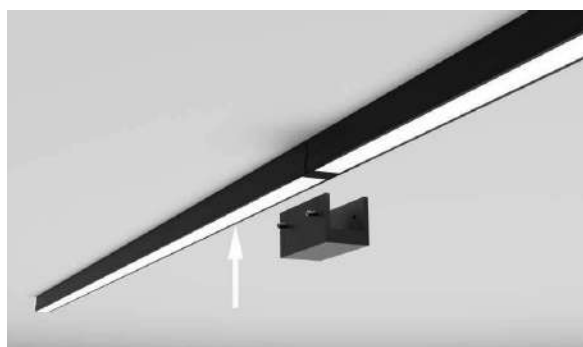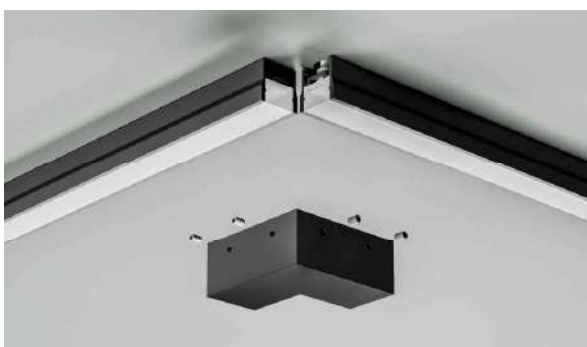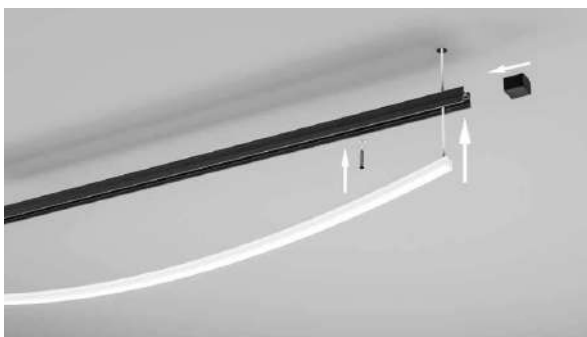

Outdoor Track

W: 26mm H: 25mm

- ☐ 5406 1m
- ☐ 5407 2m
- ☐ 5408 3m
- ☒ 5409 1m
- ☒ 5410 2m
- ☒ 5411 3m



L joint ceiling

L: 70mm W: 70mm H: 26mm

- ☐ 5412
- ☒ 5413



L joint wall ceiling

L: 70mm W: 70mm H: 30mm

- ☐ 5425
- ☒ 5426



Linear joint

L: 100mm W: 30mm H: 26mm

- ☐ 5414
- ☒ 5415



End cap

L: 62mm W: 30mm H: 26mm

- ☐ 5416
- ☒ 5417



Waterproof silicone cover


L: 20mm W: 14mm H: 4mm

- ☐ 5418


Power supplies 48V (page 408).



Mac 30



Mac 60



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes

12W
Floor
3.000K / 4.000K
890 lm / 900 lm
Aluminium and Polycarbonate
White / Black / Corten

12W
Floor
3.000K / 4.000K
890 lm / 900 lm
Aluminium and Polycarbonate
White / Black / Corten

Code

☐	3.000K	4837
☐	4.000K	4838
☒	3.000K	4839
☒	4.000K	4840
☒	3.000K	4841
☒	4.000K	4842

☐	3.000K	4843
☐	4.000K	4844
☒	3.000K	4845
☒	4.000K	4846
☒	3.000K	4847
☒	4.000K	4848



3 YEARS WARRANTY

30,000 HOURS

IP 65

220/240 VAC

PF >0,9


CRI ≥80

100°

50/60 Hz


IK06

+50°C / -20°C

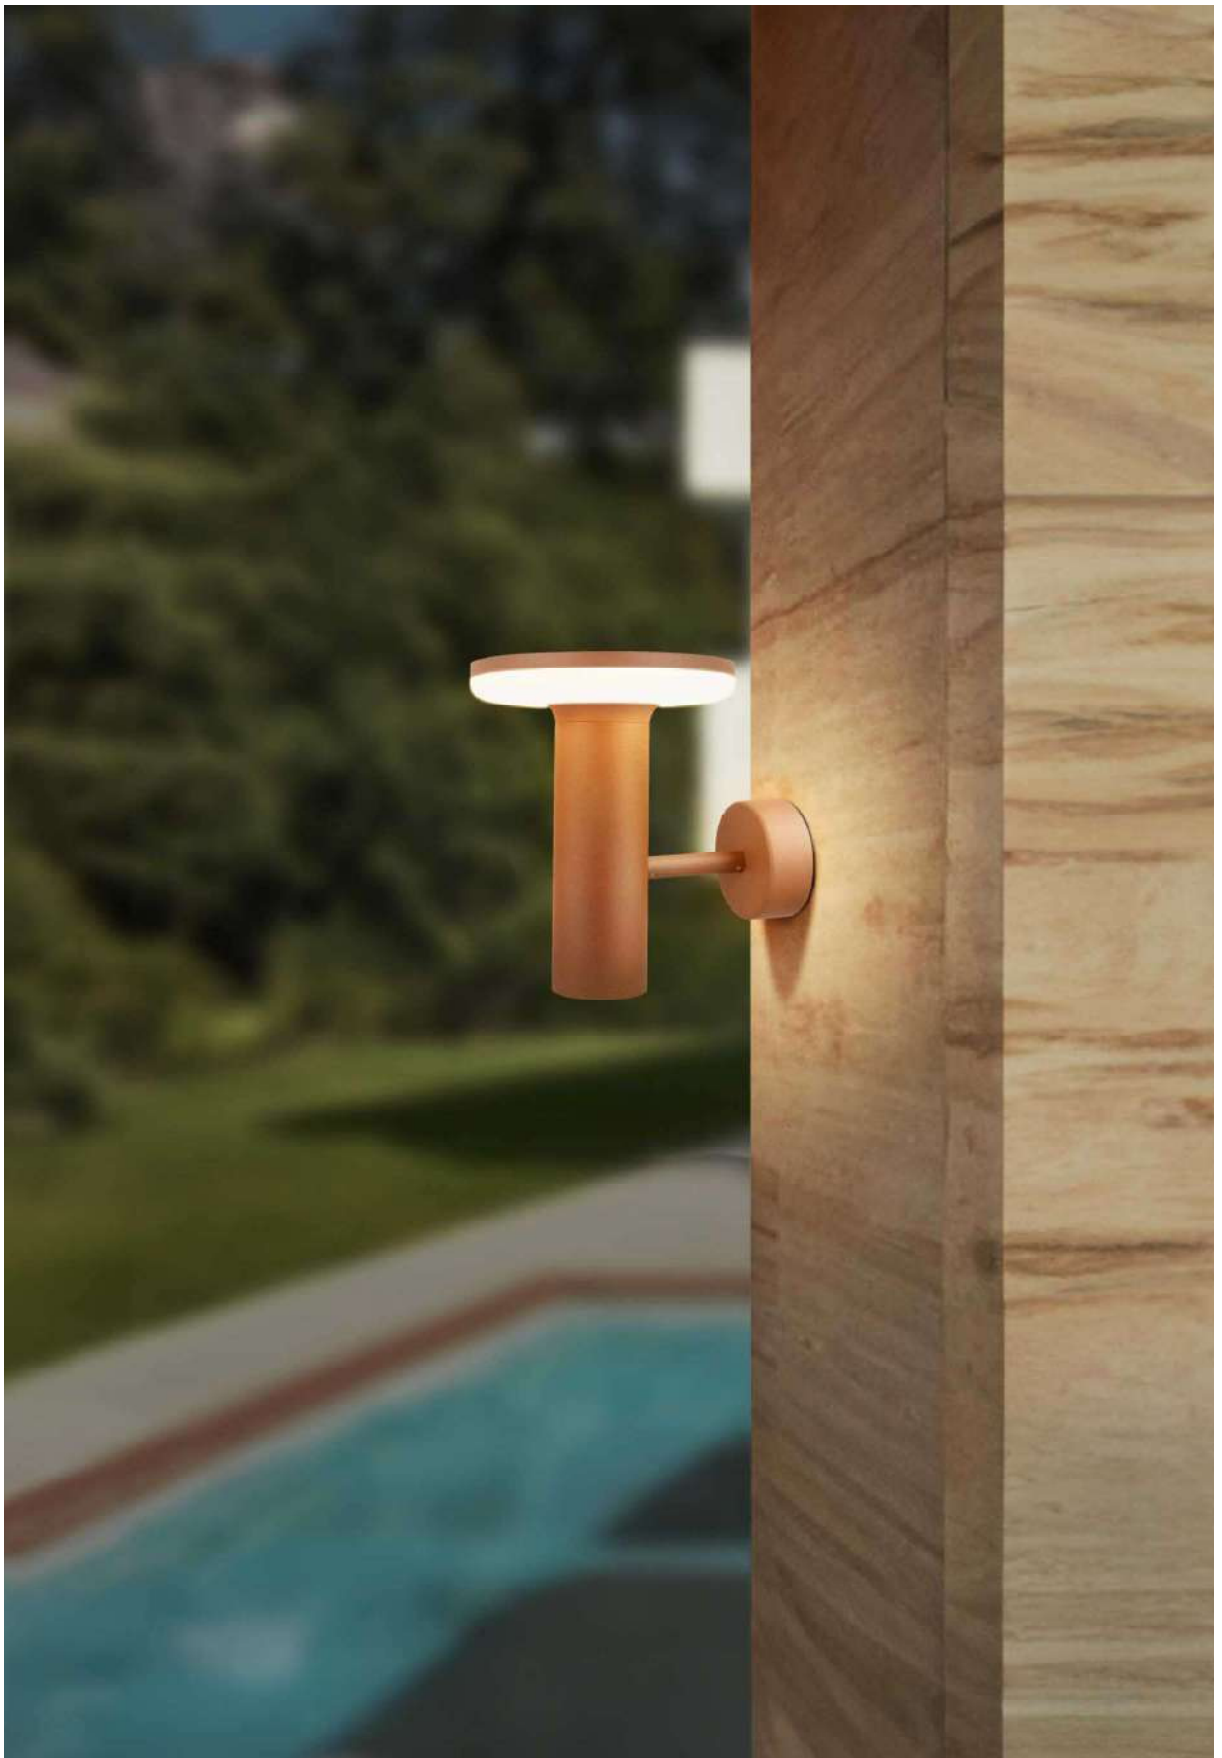


New

Mac wall base




Technical Information

Power	12W
Installation	Wall
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	1,020 lm
Material	Aluminium and Polycarbonate
Finishes	White / Black / Corten
Code	☐ 5264 ☒ 5265 ☐ 5266






Tura 30



Tura 60



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes

12W
Floor
3,000K / 4,000K
950 lm / 960 lm
Aluminium and Methacrylate
White / Black / Corten

12W
Floor
3,000K / 4,000K
950 lm / 960 lm
Aluminium and Methacrylate
White / Black / Corten

Code

☐	3,000K	4849
☐	4,000K	4850
☒	3,000K	4851
☒	4,000K	4852
☒	3,000K	4853
☒	4,000K	4854


☐	3,000K	4855
☐	4,000K	4856
☒	3,000K	4857
☒	4,000K	4858
☒	3,000K	4859
☒	4,000K	4860





Clos 8W

Clos 16W

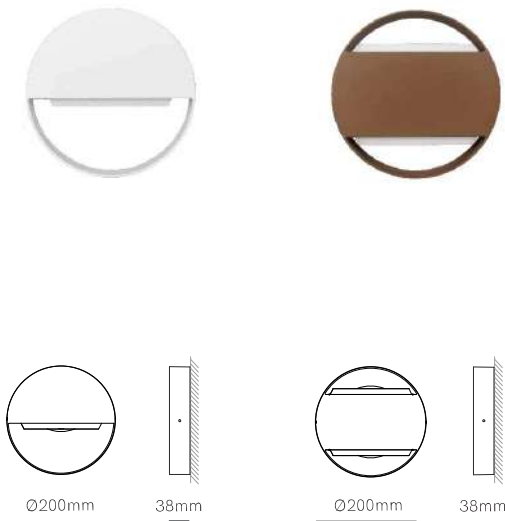

*Accessories (pages 562 and 563).



Technical Information

Power	8W	16W
Installation	Surface / Floor	Surface / Floor
Color Temperature	Switch 3.000K / 4.000K / 5.000K	Switch 3.000K / 4.000K / 5.000K
Lumens	1.000 lm	2.100 lm
Material	Aluminium and polycarbonate	Aluminium and polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	□ 4876 ■ 4877 ■ 4878	□ 4879 ■ 4880 ■ 4881
	120°	120°



5 YEARS WARRANTY

50.000 HOURS

IP 65

175/265 VAC

PF >0,9

CRI ≥80

50/60 Hz



IK08

+40°C
-25°C

CCT SWITCH

Clos 8W base 30cm

Clos 16W base 30cm



*Need Clos (page 561).

Technical Information

Installation
Material
Finishes

Surface / Floor
Aluminium
White / Black / Corten

Surface / Floor
Aluminium
White / Black / Corten

Code

☐	4882
☒	4883
☐	4884



☐	4888
☒	4889
☐	4890



Clos 8W base 60cm



Clos 16W base 60cm



*Need Clos (page 561).



Technical Information

Installation
Material
Finishes

Surface / Floor
Aluminium
White / Black / Corten

Surface / Floor
Aluminium
White / Black / Corten

Code


☐	4885
☒	4886
☐	4887

☐	4891
☒	4892
☐	4893






Mini comet



Comet



Technical Information

Power	Switch 10W / 20W	Switch 20W / 40W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	10W: 1.250 lm / 20W 2.400 lm	20W: 2.500 lm / 40W: 5.000 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	5075 5076 5113	5073 5074 5112



3 YEARS WARRANTY

30,000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

40°x90°

50/60 Hz

IK10

+45°C
-25°C

AKZO NOBEL


CCT SWITCH

POWER SWITCH


TRIAC DIMM



Cam 60




Cam 110



Technical Information


Power	9W	9W
Installation	Floor	Floor
Color Temperature	3,000K / 4,000K	3,000K / 4,000K
Lumens	690 lm / 700 lm	690 lm / 700 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3,000K 4709	☐ 3,000K 3751
	☐ 4,000K 3586	☐ 4,000K 3752
	☒ 3,000K 4710	☒ 3,000K 3753
	☒ 4,000K 3590	☒ 4,000K 3754
		




3 YEARS WARRANTY | 25,000 HOURS |  | IP 54 | 220/240 VAC | PF >0,7 | CRI ≥80 |  120° | 50 Hz |  IK08 |  +45°C / -25°C



Neo



Neo XL



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	3,000K / 4,000K	3,000K / 4,000K
Lumens	690 lm / 700 lm	1,640 lm / 1,650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black

Code	☐	3,000K	3747	☐	3,000K	3890
	☐	4,000K	3748	☐	4,000K	3891
	☒	3,000K	3749	☒	3,000K	3892
	☒	4,000K	3750	☒	4,000K	3893

IP 54	220/240 VAC	PF >0,7	1/12	IP 65	100/240 VAC	PF >0,9	1/4
-------	-------------	---------	------	-------	-------------	---------	-----



3 YEARS WARRANTY

25,000 HOURS

CRI ≥80

120°

50 Hz



IK08

+45°C
-25°C

Neo sensor



Neo XL sensor



Technical Information

Power	9W	18W
Installation	Surface	Surface
Color Temperature	3,000K / 4,000K	3,000K / 4,000K
Lumens	690 lm / 700 lm	1,640 lm / 1,650 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3,000K 3585	☐ 3,000K 3886
	☐ 4,000K 3583	☐ 4,000K 3887
	☒ 3,000K 3584	☒ 3,000K 3888
	☒ 4,000K 3582	☒ 4,000K 3889
	220/240 VAC PF >0,7 	100/240 VAC PF >0,9 



3 YEARS WARRANTY

25,000 HOURS

 → 

IP 54

CRI ≥80



120°



50 Hz



IK08



+45°C

-25°C



PIR SENSOR



ON




OFF



8 sec

8 min




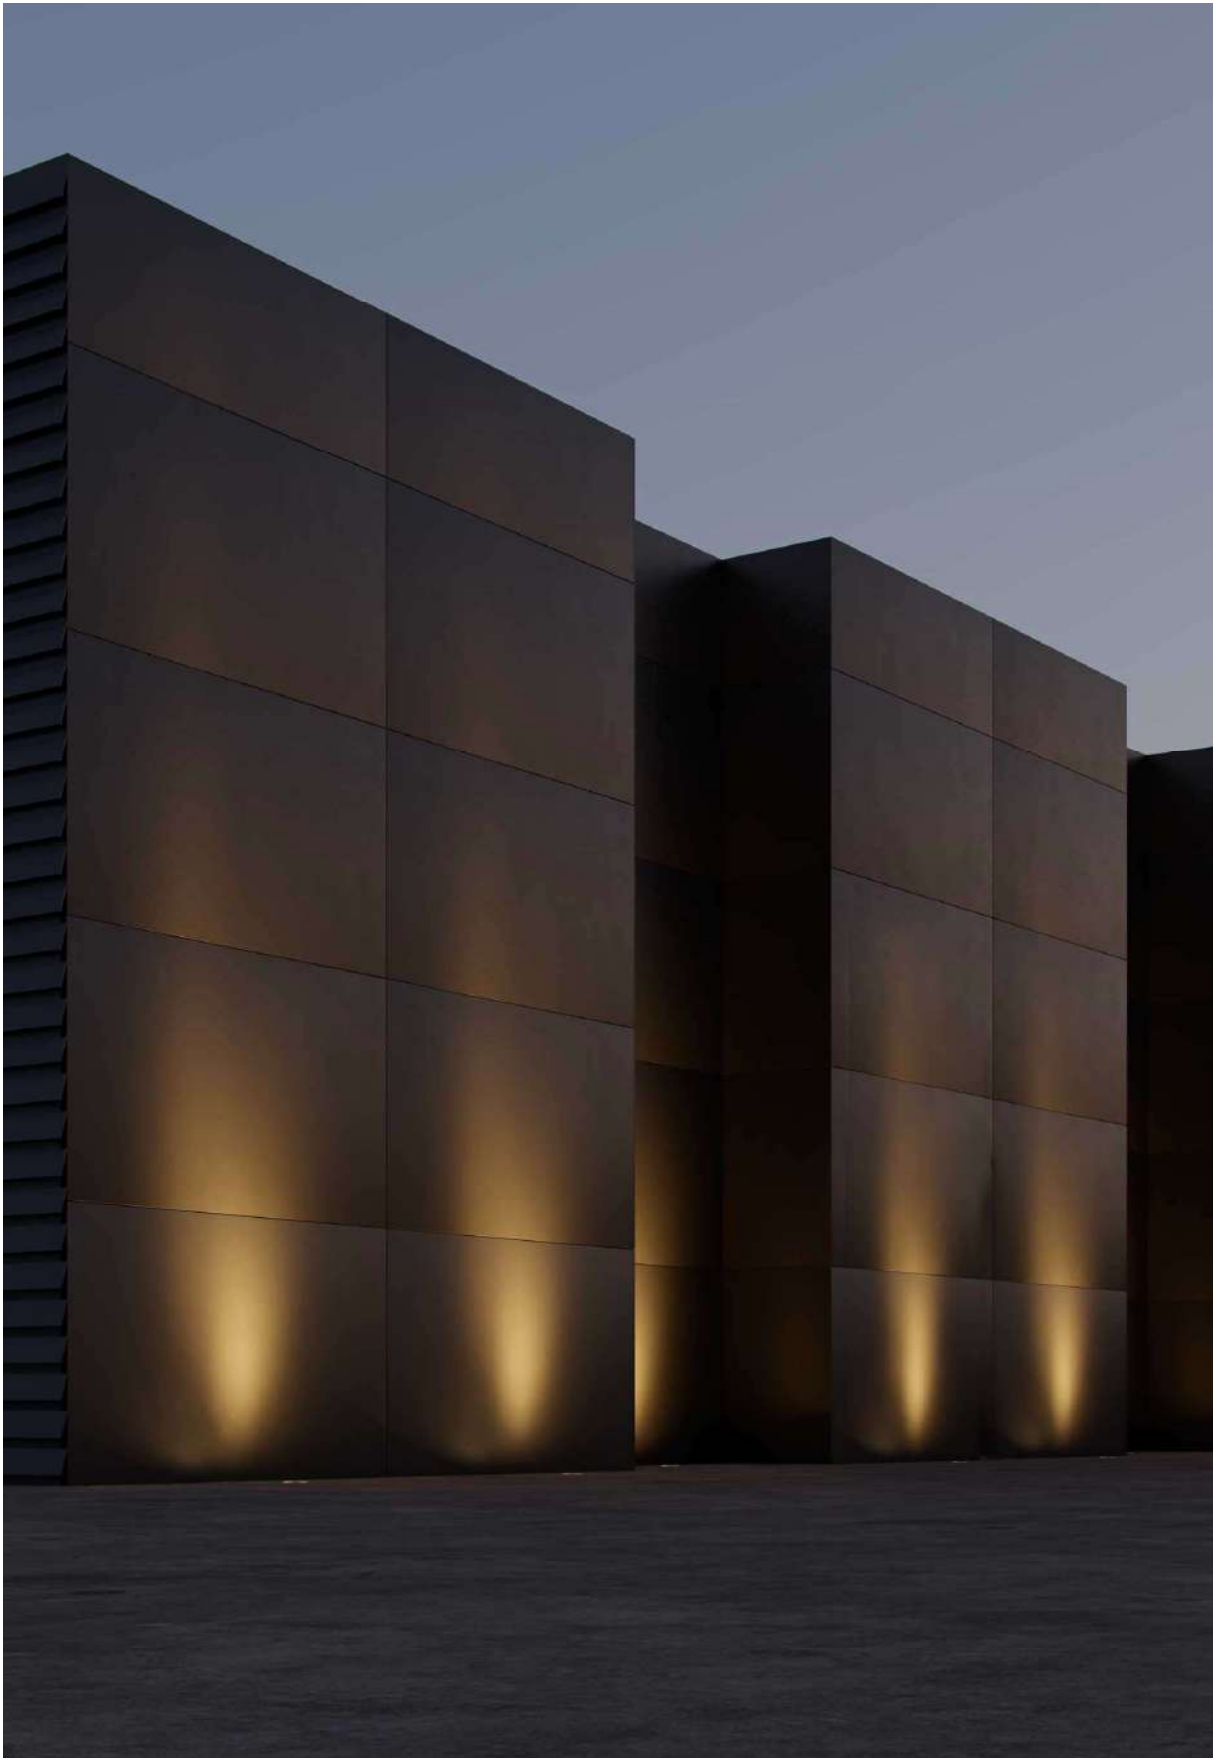

Sigma 3W



Sigma 17W



Technical Information

Power	3W	17W
Installation	Recessed	Recessed
Color Temperature	3,000K	3,000K
Lumens	210 lm	1,440 lm
Material	Aluminium	Aluminium
Finishes	Brushed	Brushed
Code	3,000K4251 PF >0,61/30	3,000K4135 PF >0,91/8



*Integrated driver, Drainage (min. 300mm).

3 YEARS WARRANTY

20,000 HOURS

IP 65

100/277 VAC

CRI ≥80


CABLE 24CM

30°


50/60 Hz

IK05

+40°C
-20°C

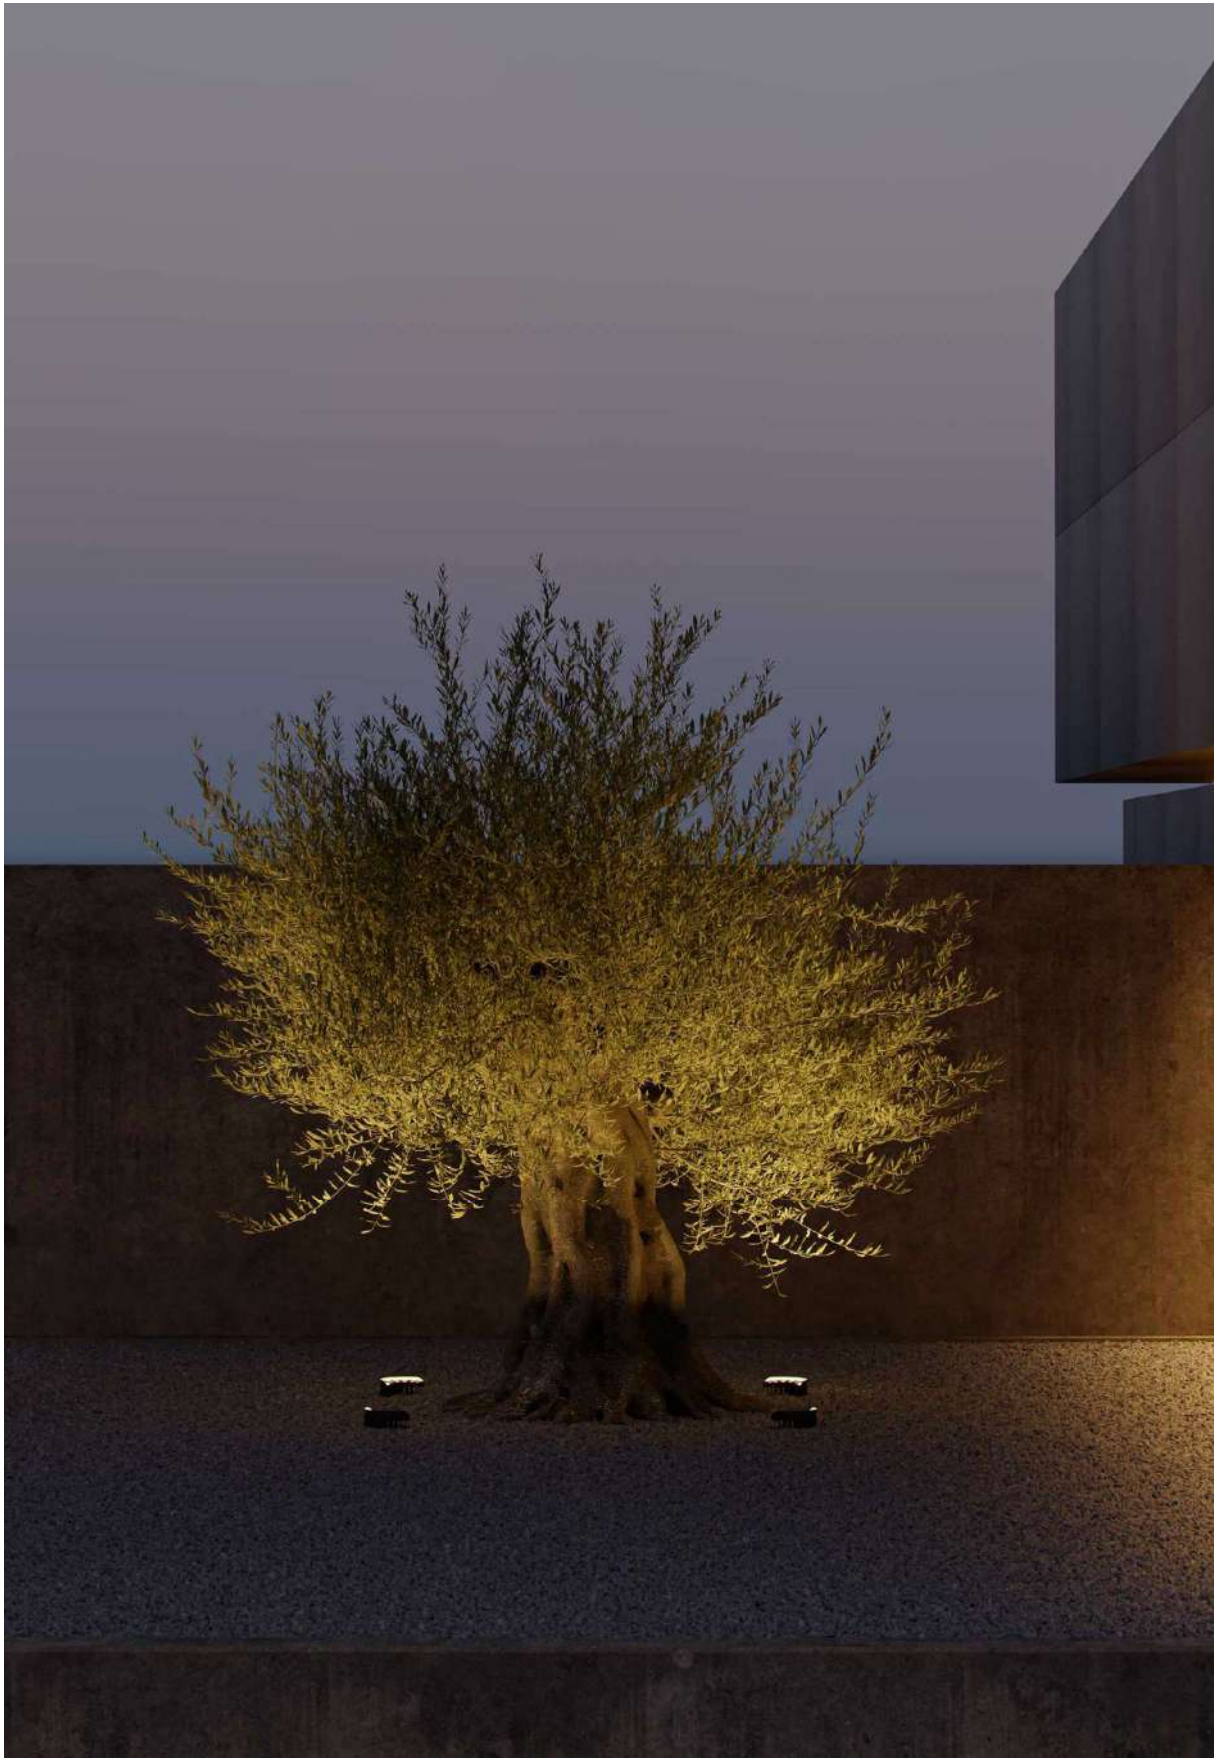

Signal



Technical Information

Power	9W
Installation	Floor / Tree trunk
Color Temperature	3,000K
Lumens	720 lm
Material	Aluminium
Finishes	Dark gray
Code	3,000K4290



*Integrated driver. IP65 connection box included.

3 YEARS WARRANTY

20,000 HOURS

IP 65

100/277 VAC

PF >0,6

CRI ≥80


CABLE 20CM

30°


50/60 Hz

IK05

+40°C
-20°C

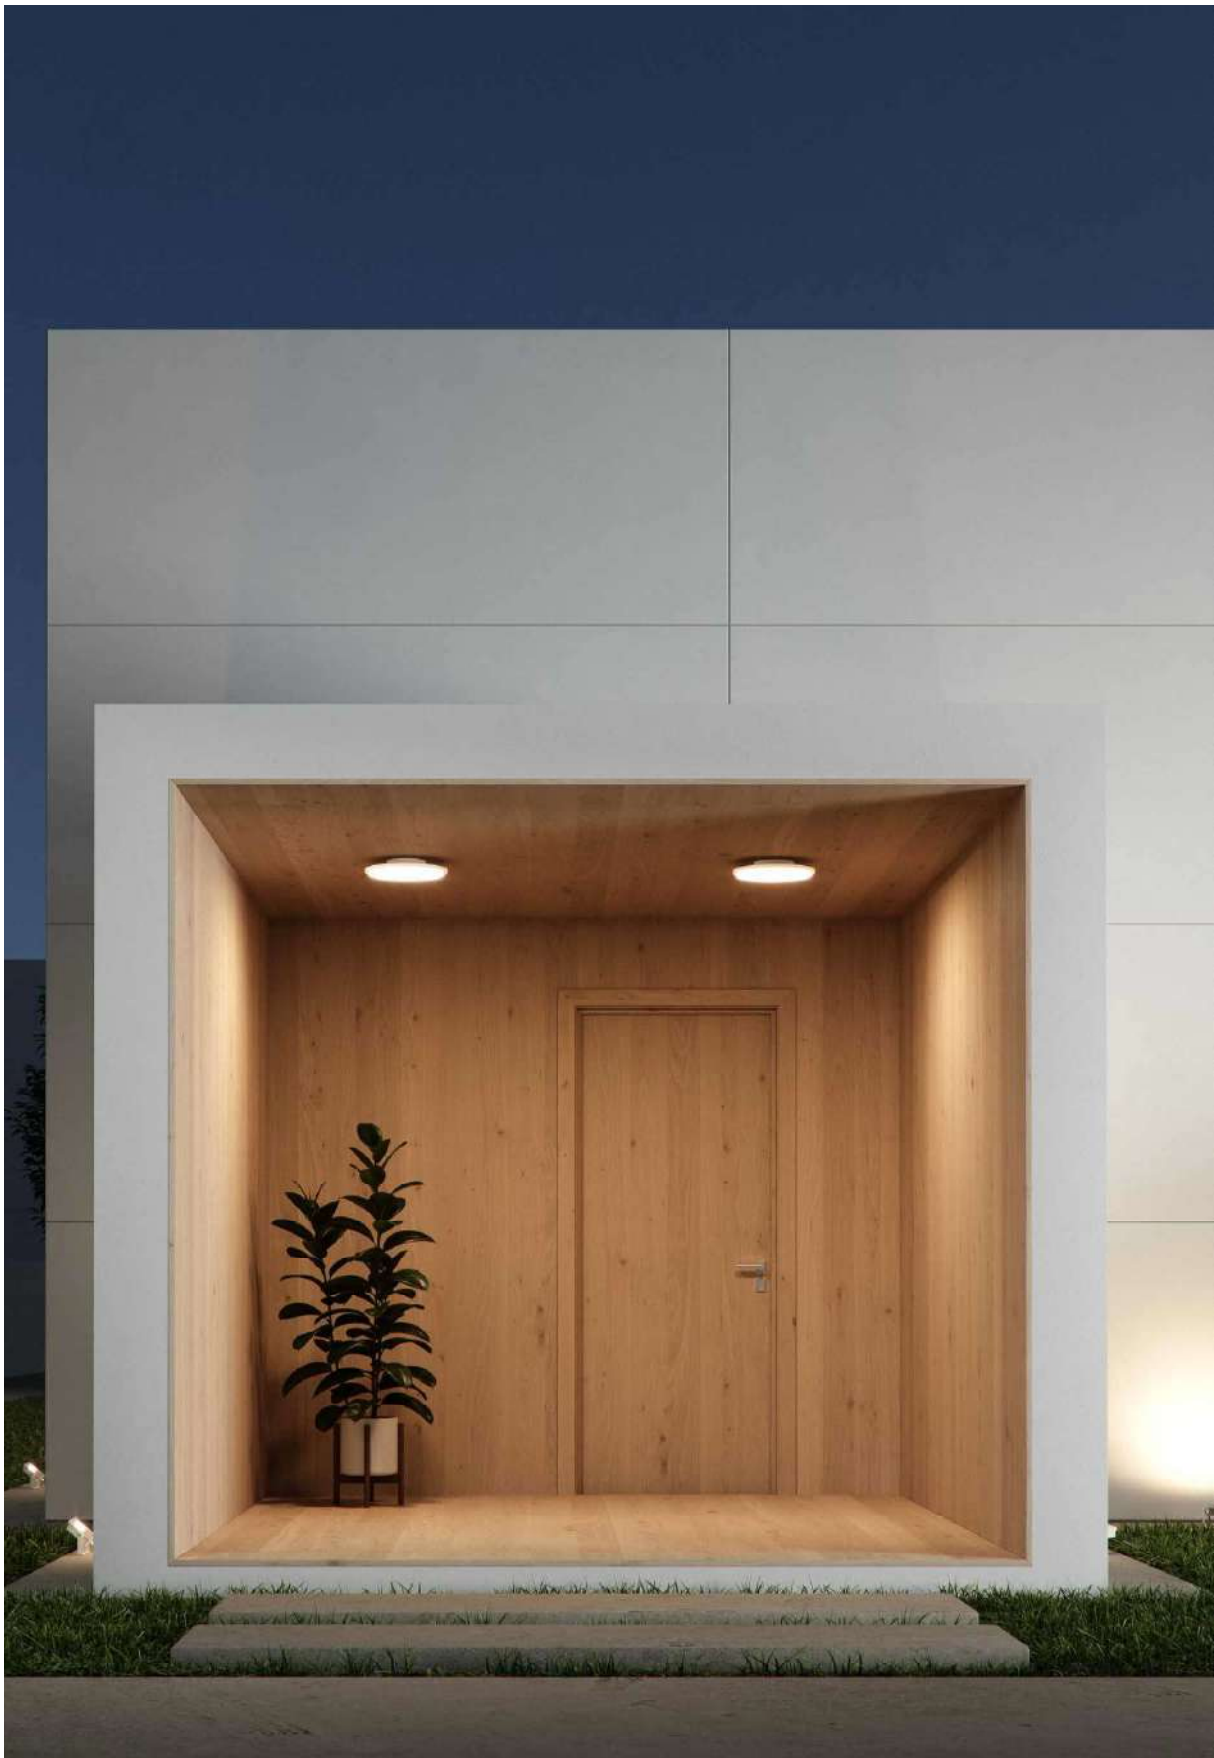

Gadir



Technical Information


Power	18W
Installation	Surface
Color Temperature	3,000K / 4,000K
Lumens	1,400 lm / 1,500 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3,000K 3758 ☐ 4,000K 3589 ☒ 3,000K 3757 ☒ 4,000K 3593 ⓘ  Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

25,000
HOURS



IP 65

100/240
VAC

PF >0,9

CRI ≥80



120°



50
Hz




IK08




+45°C
-25°C




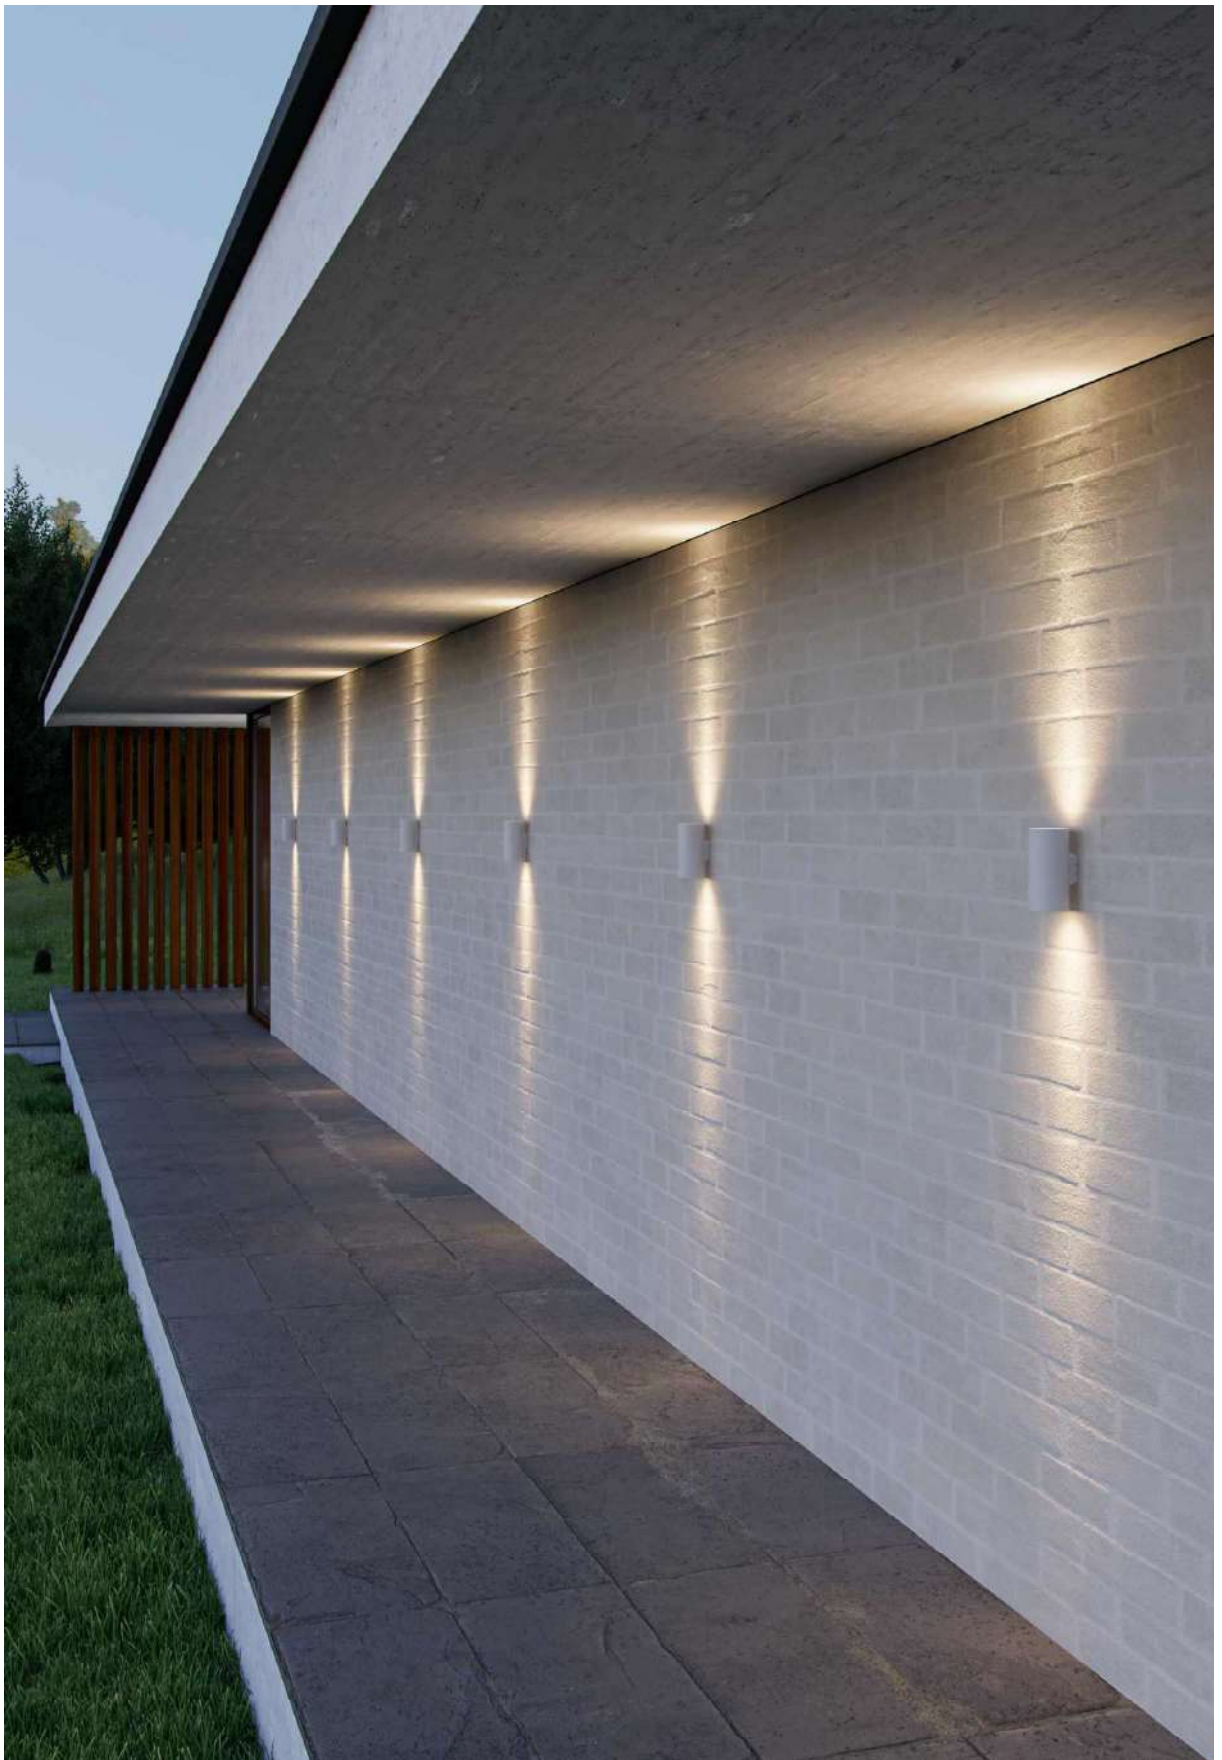

Sunset round




Sunset square




Technical Information

Power	16W	16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1,800 lm	1,800 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	☐ 4989 ☒ 4990 ☐ 4991 Custom RAL	☐ 4992 ☒ 4993 ☐ 4994 Custom RAL



① Consult delivery terms and conditions.







New

Sunset XL




Sunset XL dual




Technical Information

Power	16W	2X16W
Installation	Surface	Surface
Color Temperature	Switch 2.700K / 3.300K / 4.000K	Switch 2.700K / 3.300K / 4.000K
Lumens	1.450 lm	2.900 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	5419 5420 5421	5422 5423 5424






Lek round



Lek square



Technical Information

Power	6,8W	6,8W
Installation	Surface	Surface
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm / 530 lm / 542 lm	480 lm / 530 lm / 542 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	☐ 2.700K4906 ☐ 3.000K4907 ☐ 4.000K4908 ☒ 2.700K4909 ☒ 3.000K4910 ☒ 4.000K4911 ☒ 2.700K4912 ☒ 3.000K4913 ☒ 4.000K4914 Custom RAL	☐ 2.700K4303 ☐ 3.000K3983 ☐ 4.000K3984 ☒ 2.700K4304 ☒ 3.000K3985 ☒ 4.000K3986 ☒ 2.700K4312 ☒ 3.000K3987 ☒ 4.000K3988 Custom RAL

☐

2.700K4303

☐

3.000K3983

☐

4.000K3984

☒

2.700K4304

☒

3.000K3985

☒

4.000K3986

☒

2.700K4312

☒

3.000K3987

☒

4.000K3988Custom RAL

① Consult delivery terms and conditions.

3 YEARS WARRANTY

30,000 HOURS

IP 54

220/240 VAC

PF >0,9

CRI ≥80

0°-120°


50/60 Hz

IK04


+40°C / -10°C

AKZO NOBEL


1/12

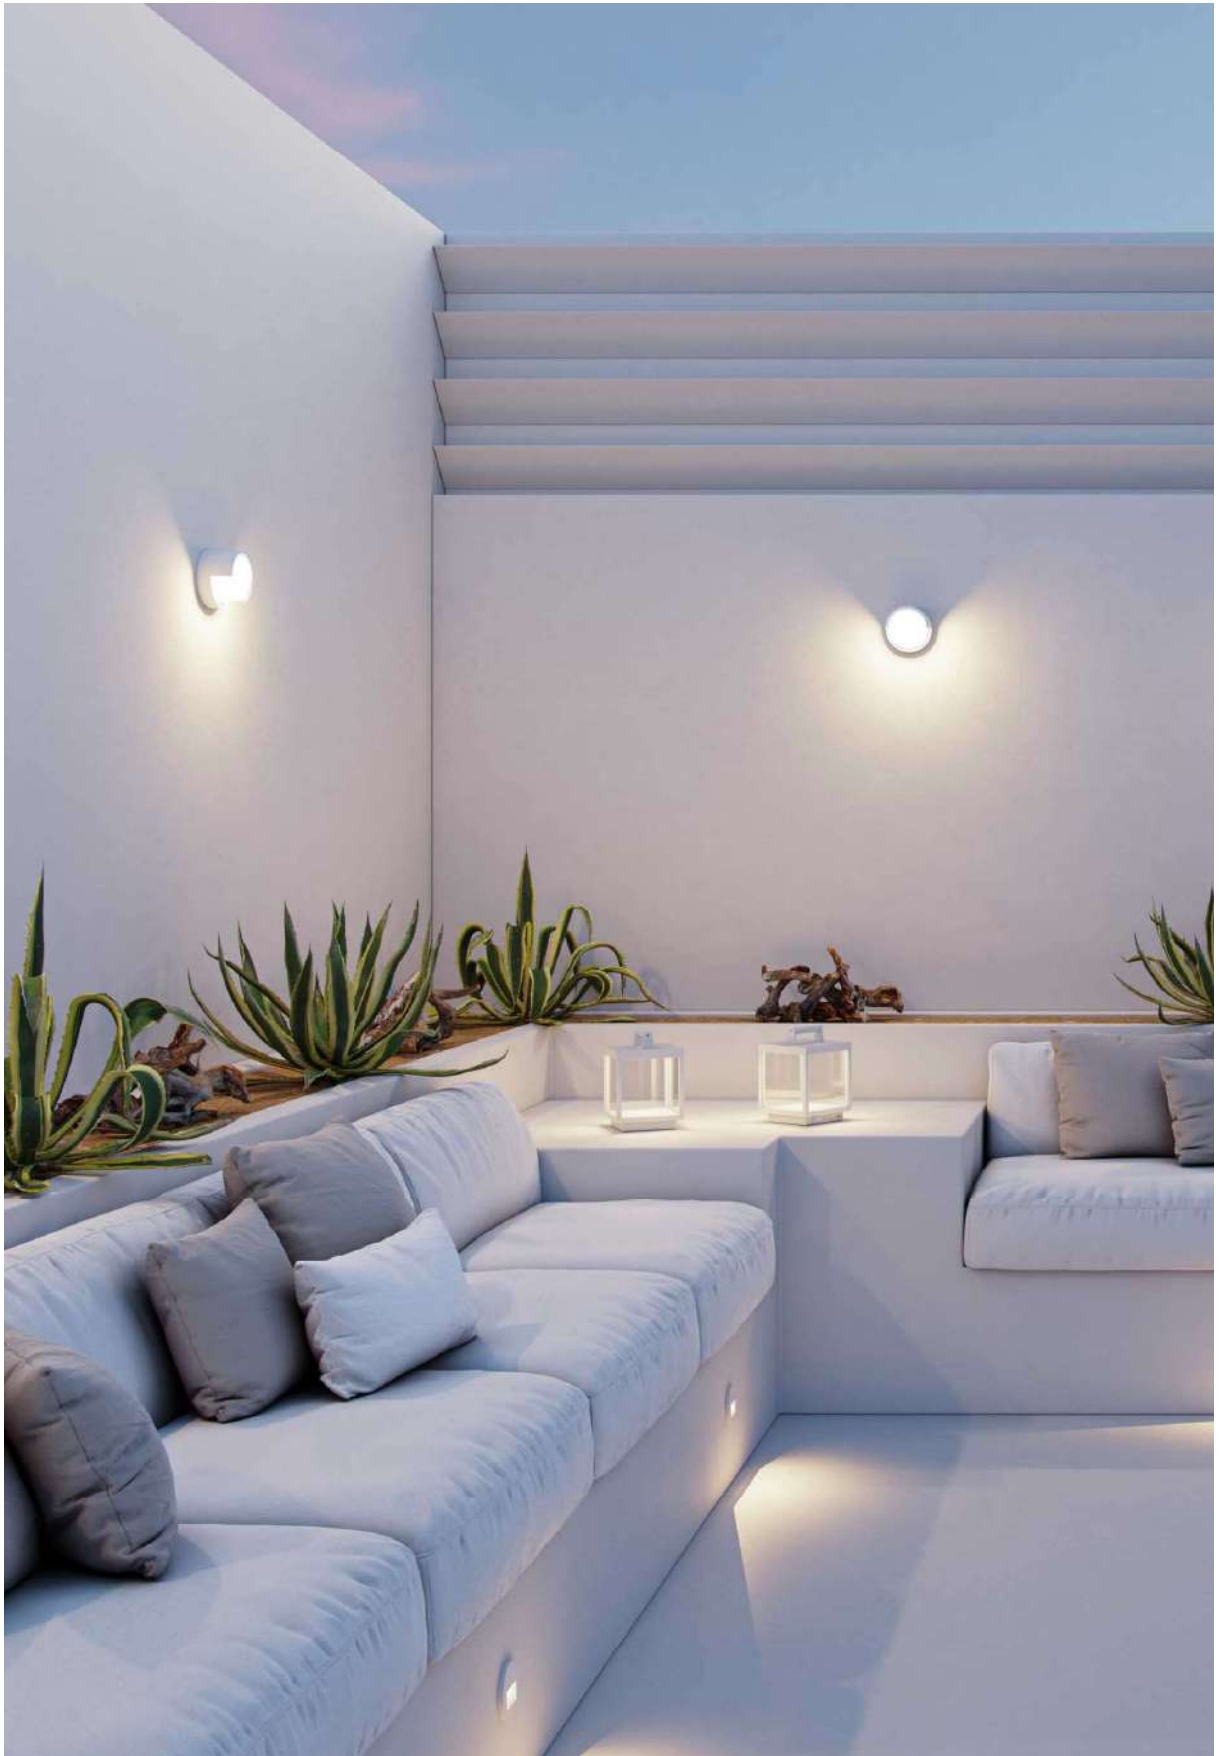


Blis round



Blis square



Blis rectangular



Technical Information

Power	15W	15W	24W
Installation	Surface	Surface	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	1.470 lm	1.370 lm	2.360 lm
Material	Polycarbonate	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten	White / Black / Corten
Code	4957 4958 4959	4960 4961 4962	4982 4983 4984

PF >0,6 | 250° 


PF >0,6 | 180° 

PF >0,9 | 180° 




*IP65 connection box included.



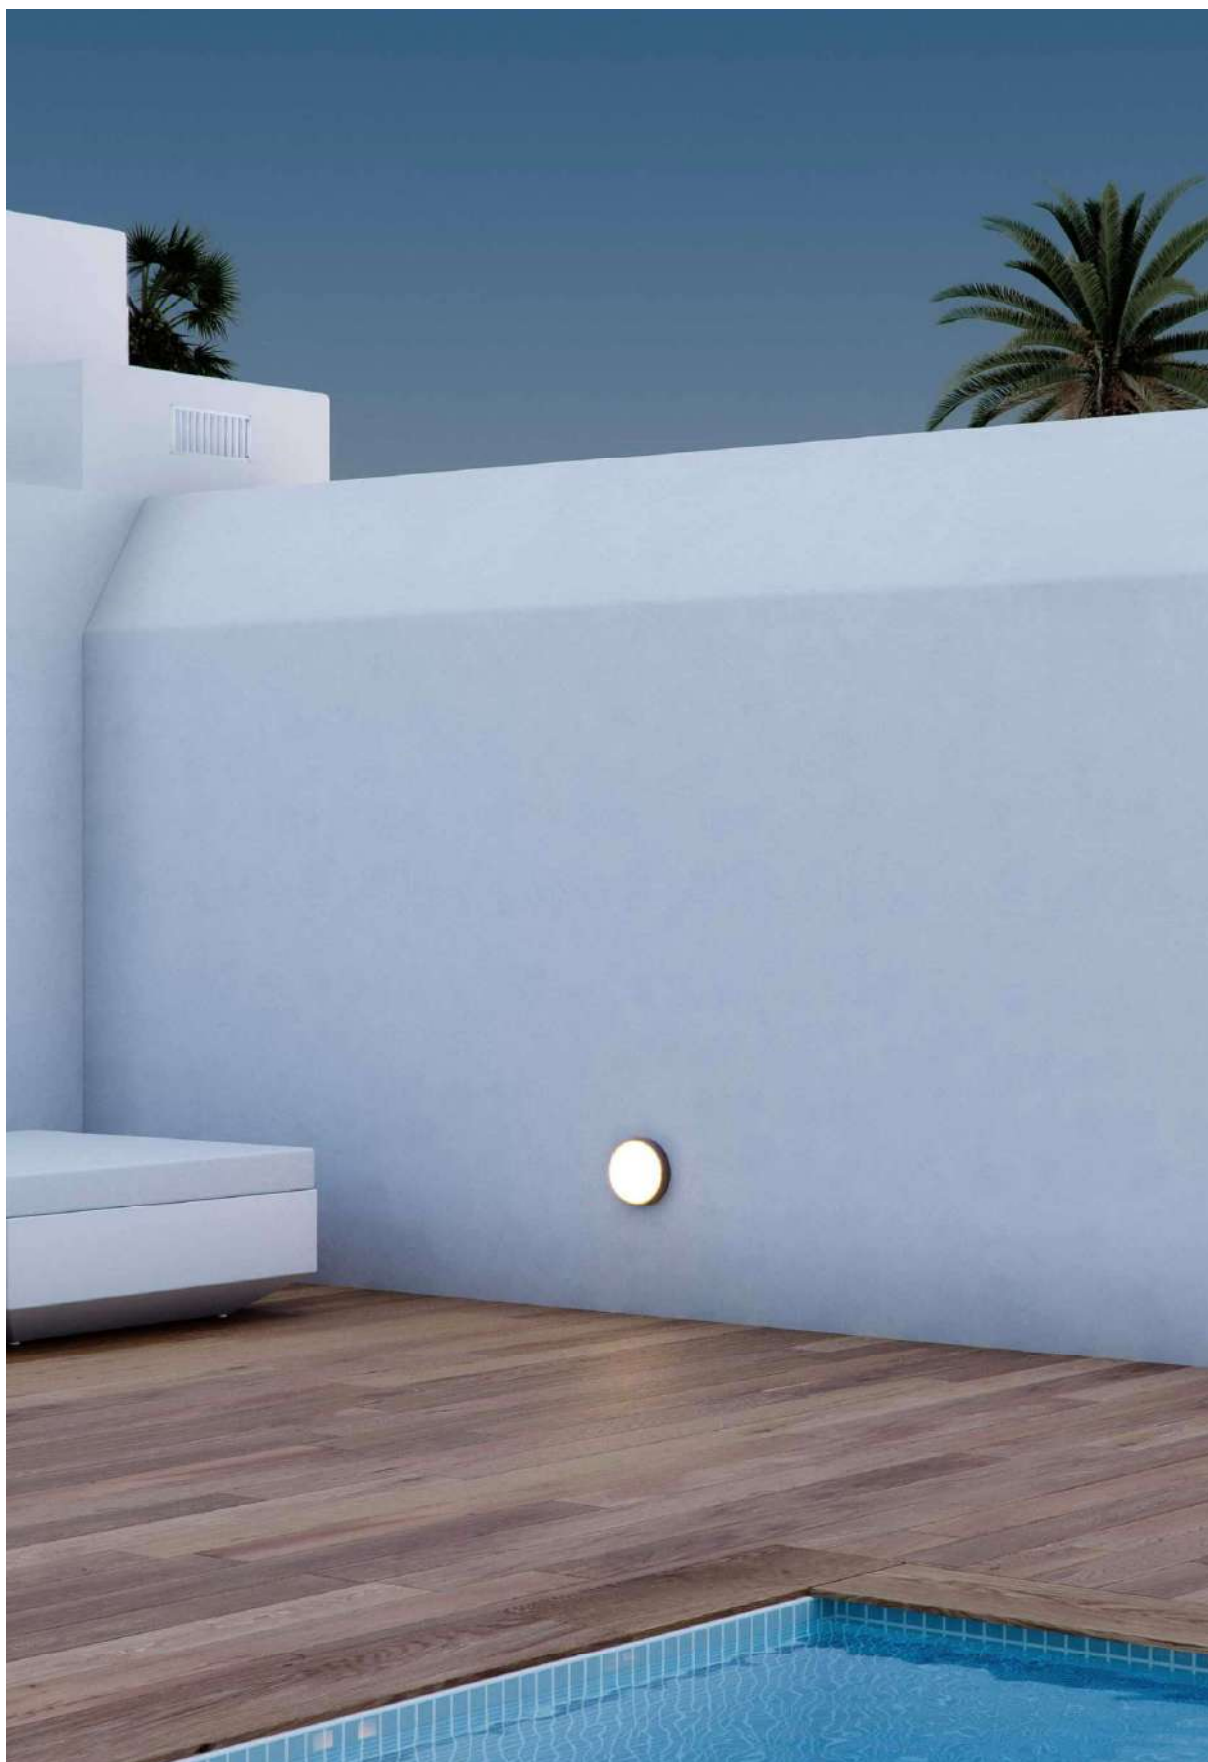

Selen



Technical Information

Power	12W
Installation	Surface
Color Temperature	3,000K / 4,000K
Lumens	1,200 lm / 1,250 lm
Material	Polycarbonate
Finishes	White / Black

Code	☐	3,000K	4668
	☐	4,000K	4667
	☒	3,000K	4828
	☒	4,000K	4827
		Custom RAL	



ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25,000 HOURS

 → 

IP 65

220/240 VAC

PF >0,9

CRI ≥80



120°





50/60 Hz



IK02




+40°C
-20°C



1/10



Zibor



Technical Information

Power	12W
Installation	Surface
Color Temperature	3,000K / 4,000K
Lumens	1,200 lm / 1,250 lm
Material	Polycarbonate
Finishes	White / Black
Code	☐ 3,000K 4670 ☐ 4,000K 4669 ☒ 3,000K 4830

☒

4,000K

4829

Custom RAL



ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

25,000
HOURS

IP 65

220/240
VAC

PF >0,9

CRI ≥80


120°

50/60
Hz

IK02

+40°C
-20°C


1/10

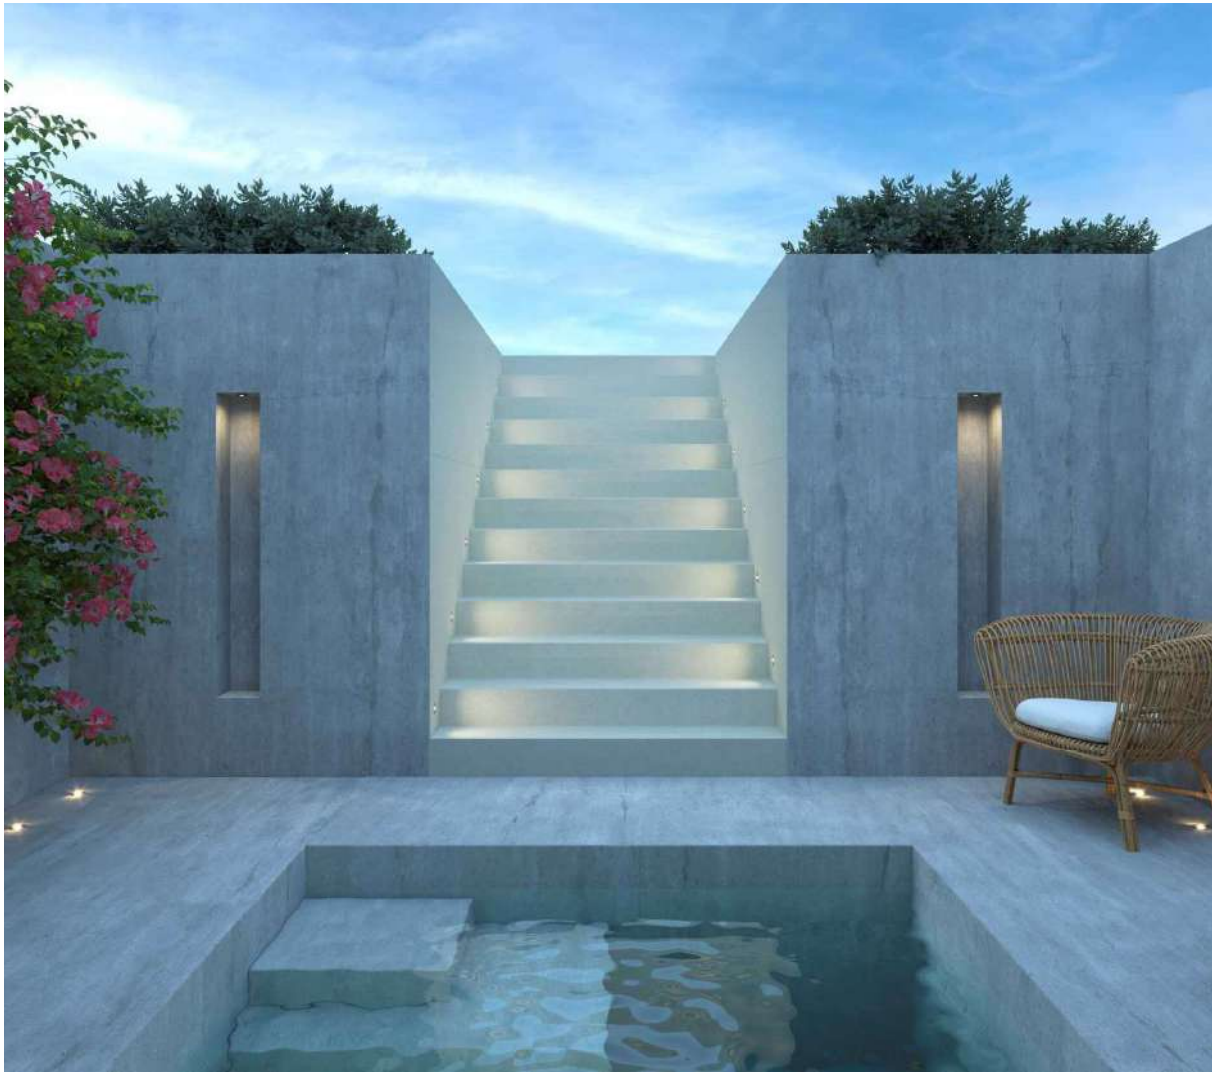

Optic



Nix




Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3,000K	3,000K
Lumens	55 lm	55 lm
Material	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox
Code	4331	4369



*Recessed box included. Integrated driver.





Technical Information

Power	2W	2W
Installation	Recessed	Recessed
Color Temperature	3,000K	3,000K
Lumens	55 lm	55 lm
Material	Inox 304	Inox 304
Finishes	Brushed Inox	Brushed Inox
Code	4367	4368



*Recessed box included. Integrated driver.

3 YEARS
WARRANTY

50,000
HOURS

IP
67

100/240
VAC

PF
>0,4

CRI
≥80

CABLE
50CM

50/60
Hz

IK09

+50°C
-20°C


1/50





Showroom Benetto Faure, La Roca del Valles (Spain).

Polo

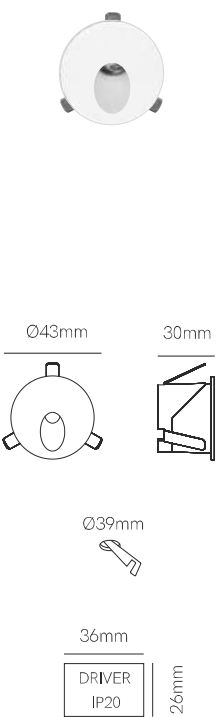

Technical Information

Power	2W
Installation	Recessed
Color Temperature	3,200K / 4,000K
Lumens	90 lm / 96 lm
Material	Aluminium
Finishes	White / Black

Code	☐	3,200K	3995
	☐	4,000K	3996
	☒	3,200K	3997
	☒	4,000K	3998
		Custom RAL	



 Consult delivery terms and conditions.

3 YEARS
WARRANTY

50,000
HOURS

IP
54

220/240
VAC

PF
>0,5

CRI
≥80




65°


50/60
Hz


 +50°C
-20°C

AKZO
NOBEL

 1/200

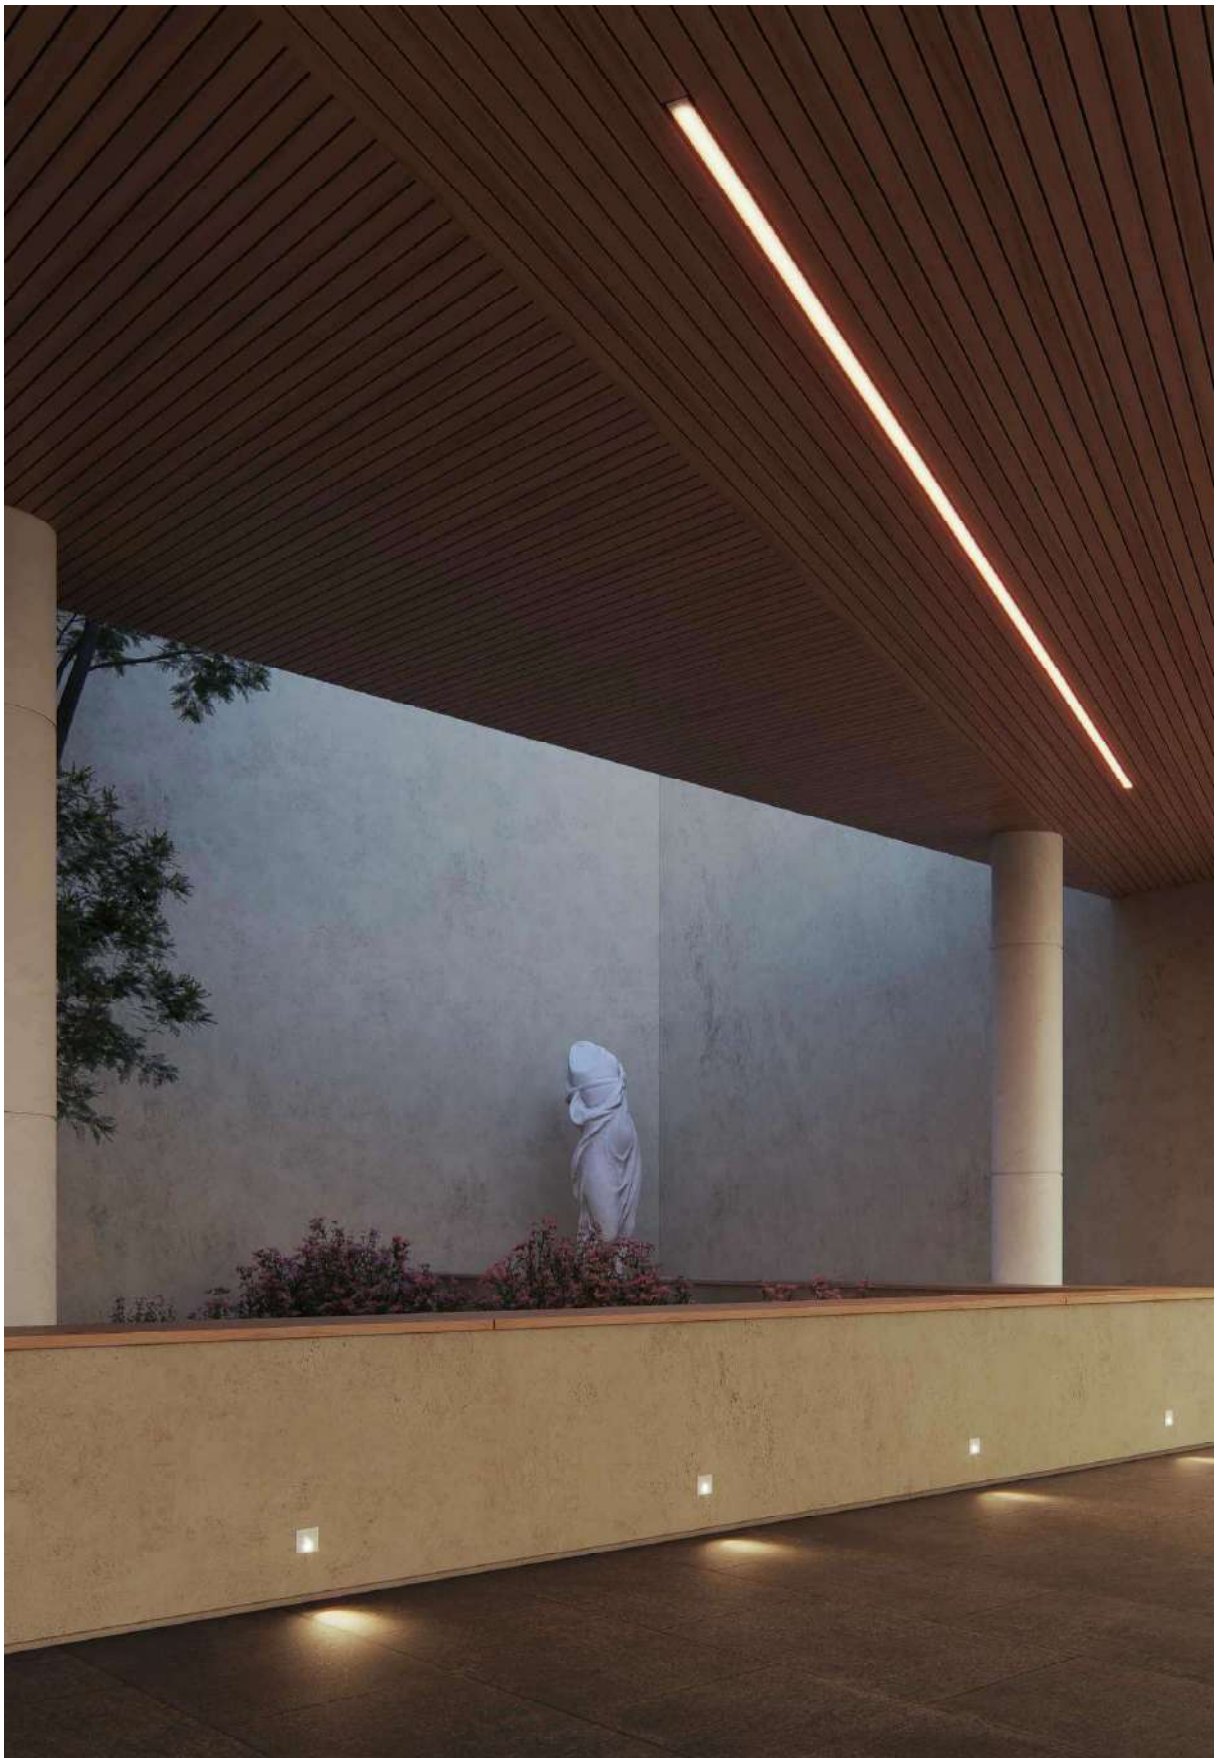

Luky

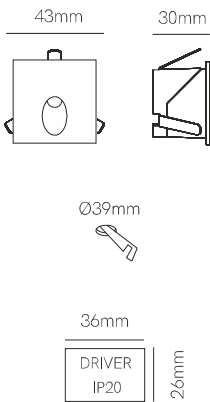

Technical Information

Power	2W
Installation	Recessed
Color Temperature	3,200K / 4,000K
Lumens	90 lm / 96 lm
Material	Aluminium
Finishes	White / Black

Code	☐	3,200K	3999
	☐	4,000K	4000
	☒	3,200K	4001
	☒	4,000K	4002
		Custom RAL	



ⓘ Consult delivery terms and conditions.

3 YEARS
WARRANTY

50,000
HOURS

IP
54

220/240
VAC

PF
>0,5

CRI
≥80


65°

50/60
Hz


+50°C
-20°C

AKZO
NOBEL

1/200

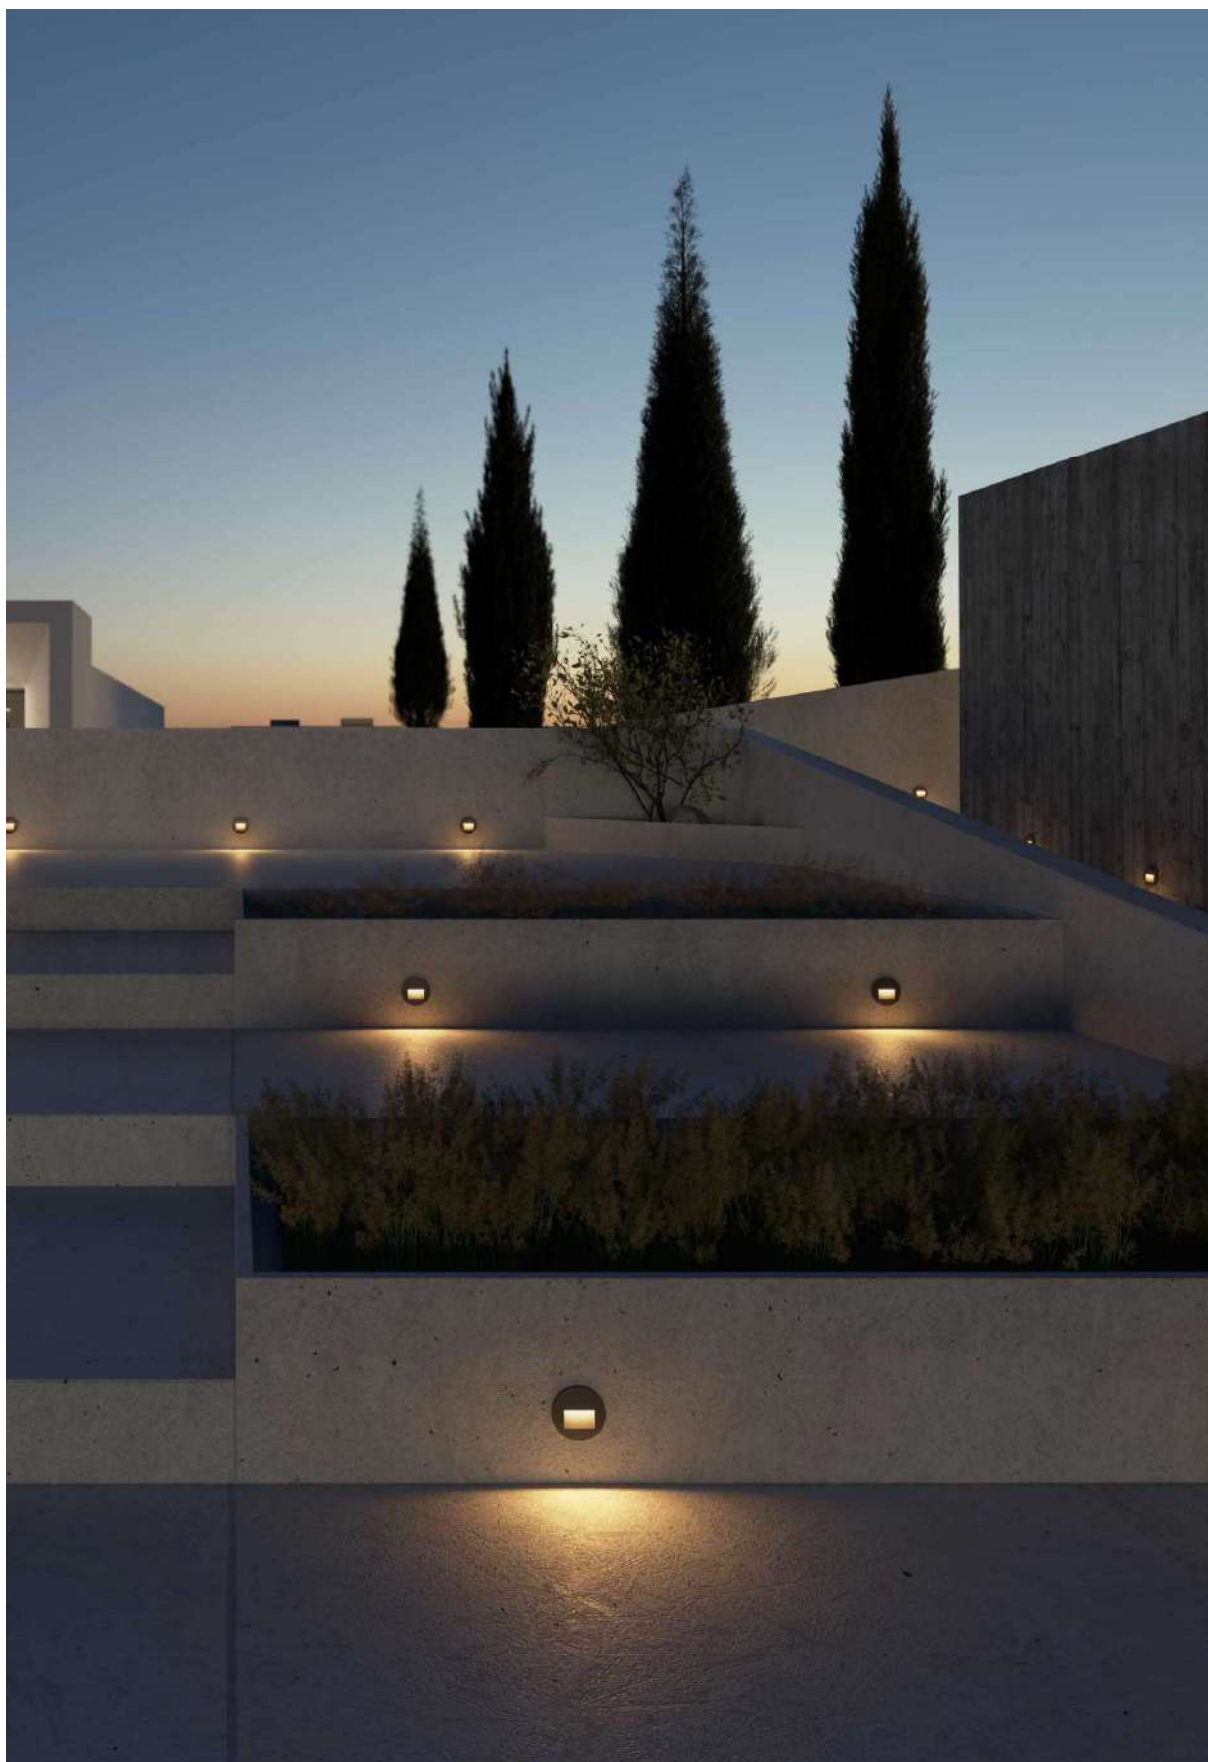

Mis round switch



Technical Information

Power	3W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	200 lm
Material	Polycarbonate
Finishes	White / Black / Corten
Code	☐ 5020 ☒ 5021

☐ Custom RAL

*Integrated driver,
① Consult delivery terms and conditions.

3 YEARS
WARRANTY

25,000
HOURS

IP 65

220/240
VAC

PF >0,5

CRI ≥80





50/60
Hz


 IK06

 +40°C
-20°C

 CCT
SWITCH

 1/10/50

Mis square switch



Technical Information

Power	3W
Installation	Surface
Color Temperature	Switch 2.700K / 3.200K / 4.000K
Lumens	140 lm
Material	Polycarbonate
Finishes	White / Black / Corten

Code	 5023
	 5024
	 5025
	 Custom RAL



*Integrated driver.

ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY

25.000 HOURS

IP 65

220/240 VAC

PF >0,5

CRI ≥80





50/60 Hz


 IK06

 +40°C
-20°C

CCT SWITCH

 1/10/50





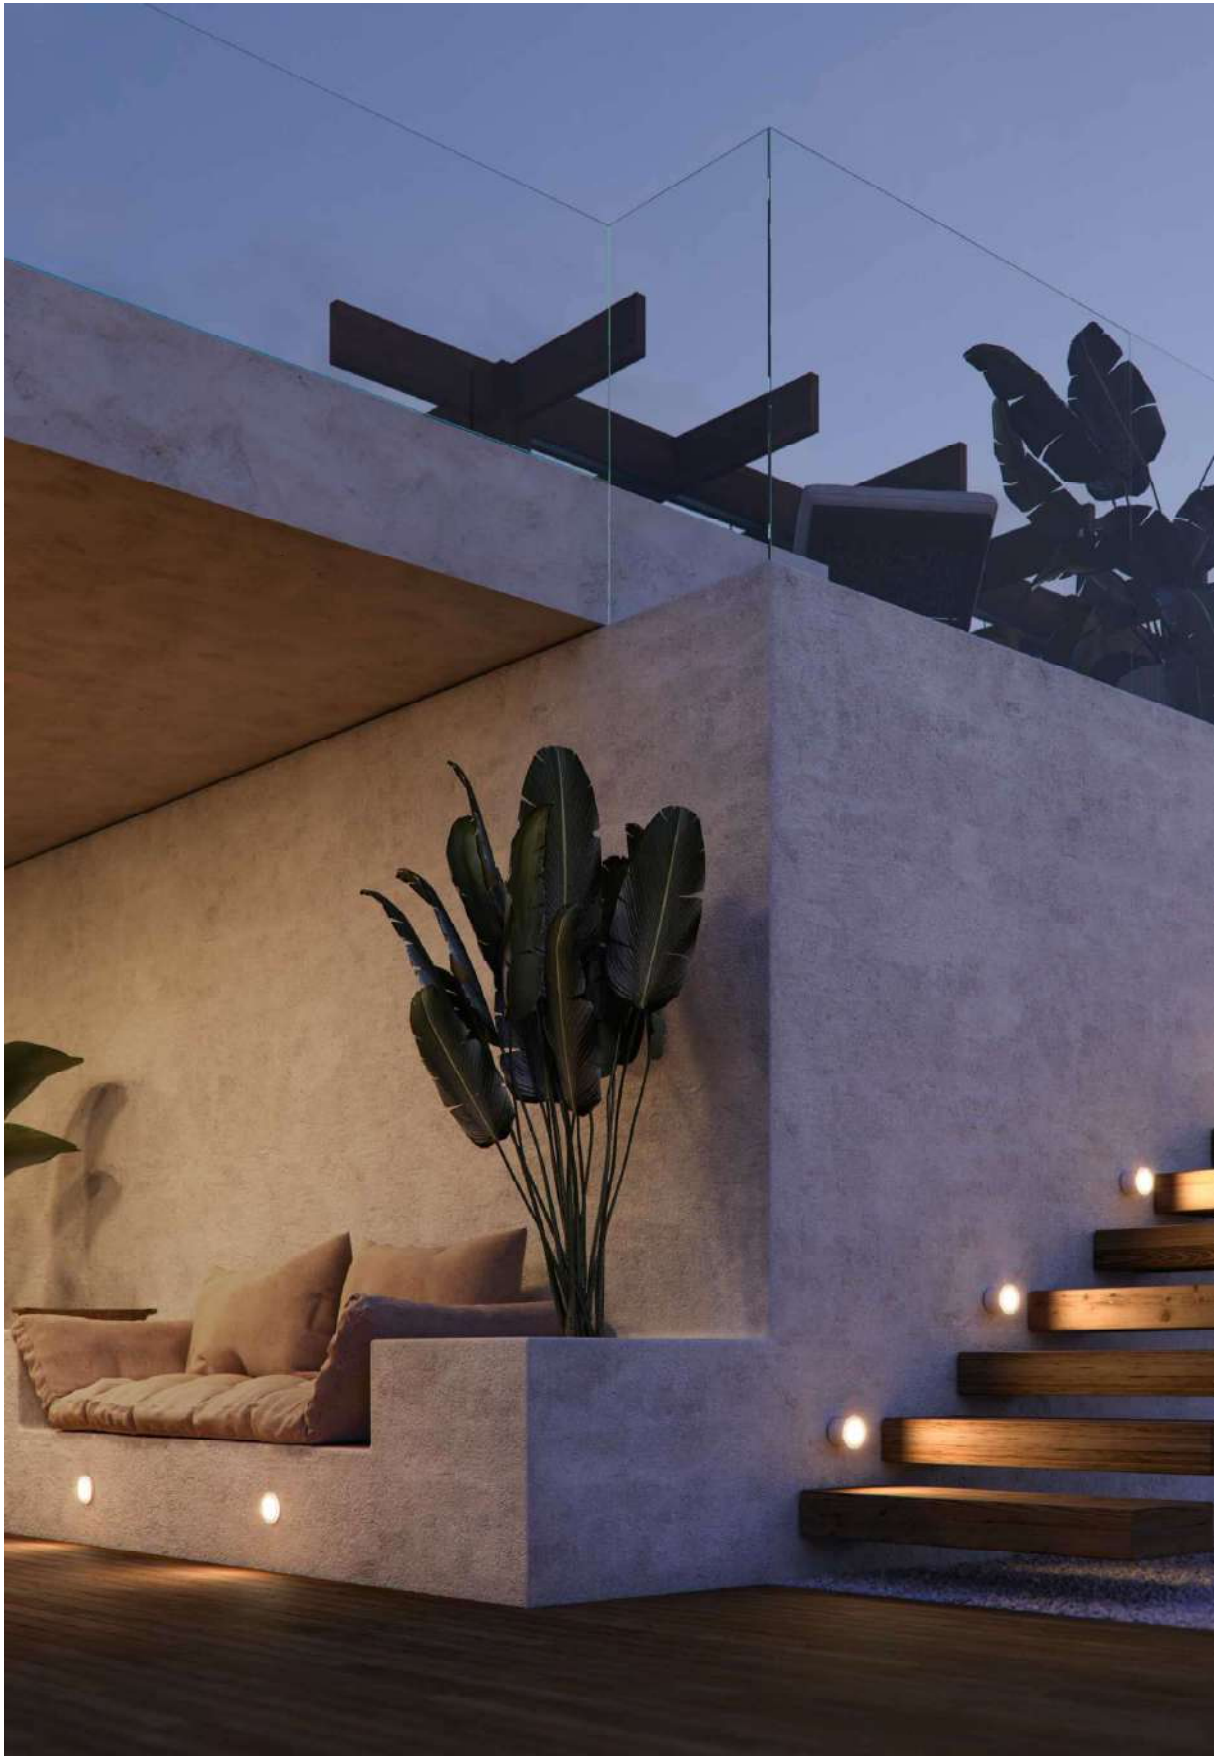

New

Artis square

Artis round



Recessed box included
107mm x 73mm x 53mm



Recessed box included
67mm x Ø74mm



Surface box included
103mm x 79mm x 57 mm



Surface box included
54mm x Ø80mm



Technical Information

Power	4,5W	4,5W
Installation	Surface / Recessed	Surface / Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	130 lm	130 lm
Material	Aluminium and glass	Aluminium and glass
Finishes	White	White
Code	☐ 5028	☐ 5205



*Recessed and surface box included.








New

Tween surface

Tween recessed

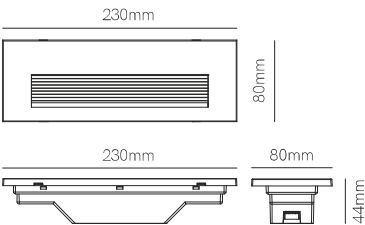

Recessed box included




Technical Information


Power	5W	5W
Installation	Surface	Recessed
Color Temperature	Switch 2.700K / 3.200K / 4.000K	Switch 2.700K / 3.200K / 4.000K
Lumens	360 lm	360 lm
Material	Polycarbonate	Polycarbonate
Finishes	White / Black / Corten	White / Black / Corten
Code	5196 5197 5198	5199 5200 5201



3 YEARS WARRANTY | 25,000 HOURS | IP 65 | 110/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | IK06 | +40°C -20°C | CCT SWITCH | 1/50

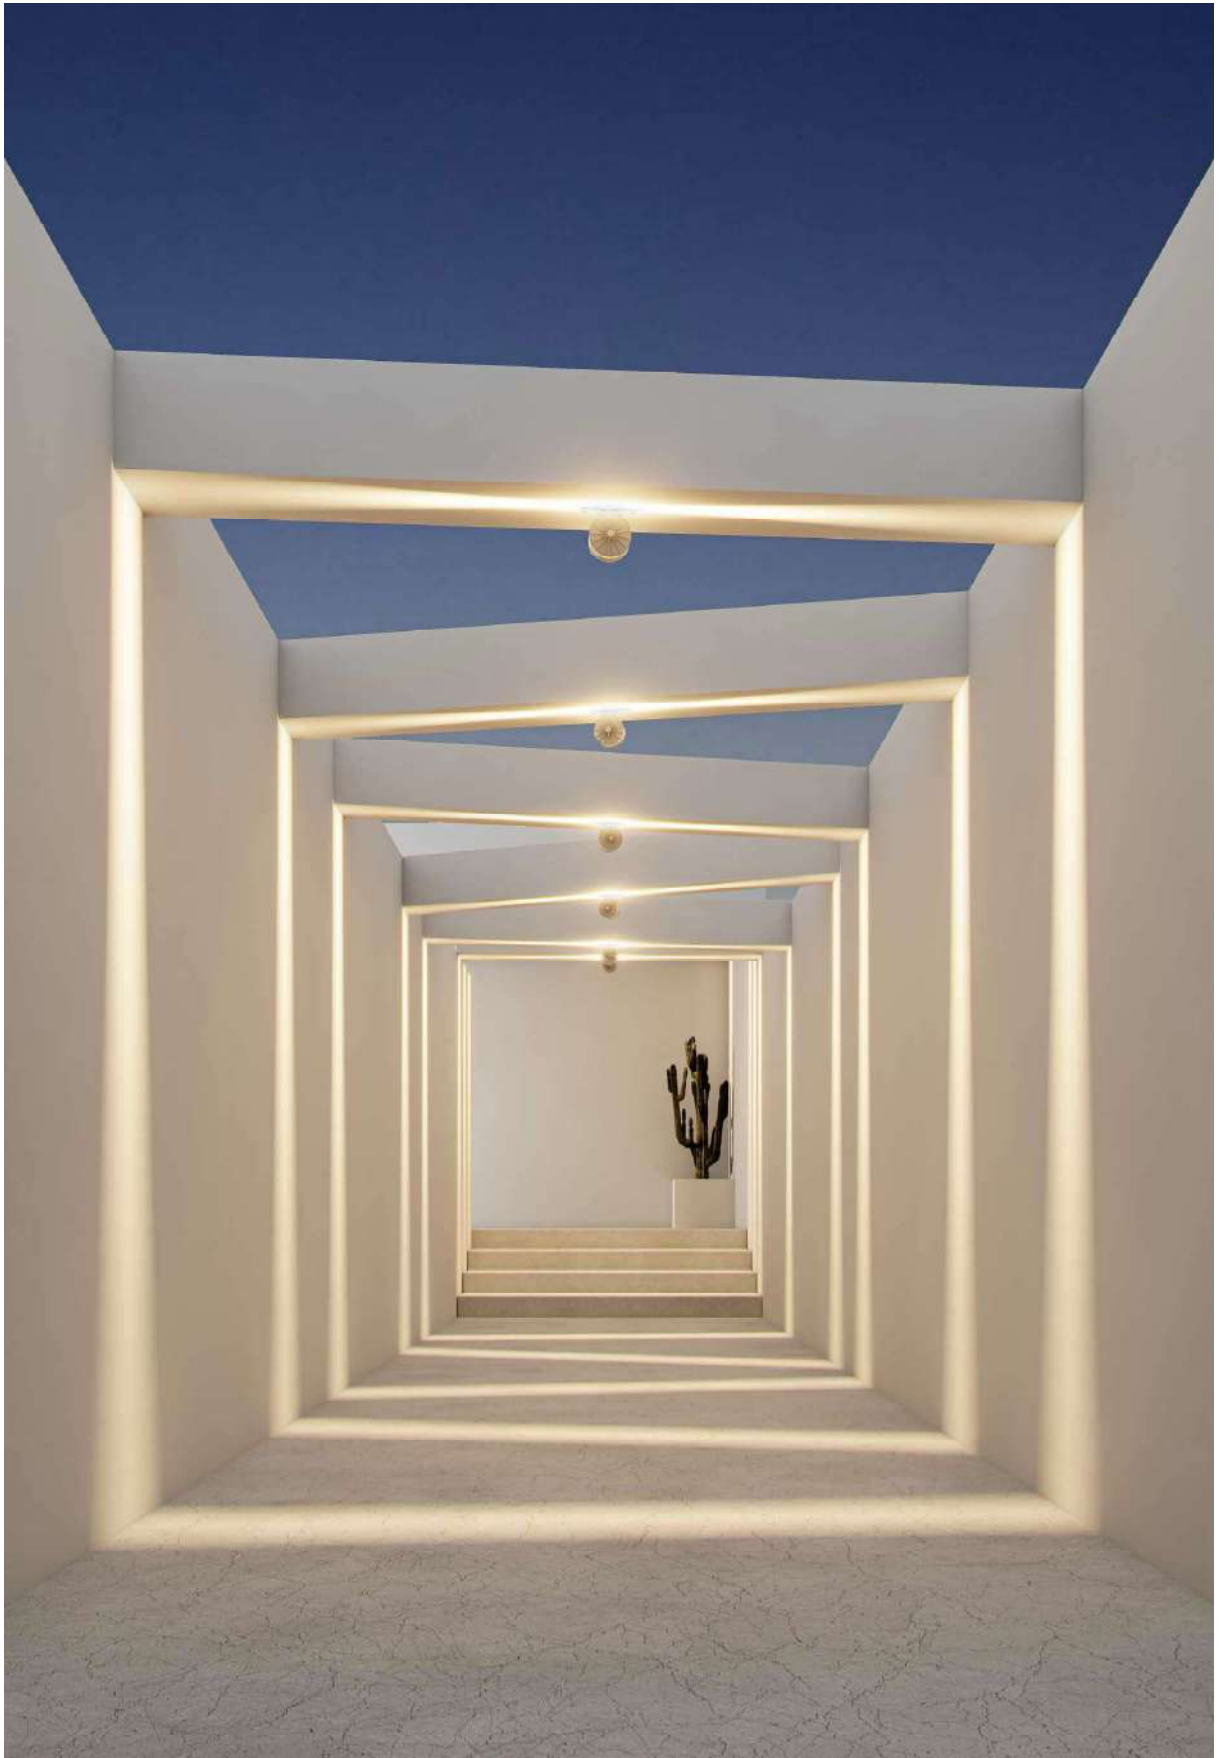

Nik



Technical Information

Power	5W
Installation	Surface
Color Temperature	3,000K / 4,000K
Lumens	340 lm / 350 lm
Material	Aluminium
Finishes	Gray
Code	3,000K4291 4,000K4292



*Integrated driver.

3 YEARS
WARRANTY

20,000
HOURS

IP
65

100/277
VAC

PF
>0,6

CRI
≥70


5°

50/60
Hz


IK05

+40°C
-20°C

1/40

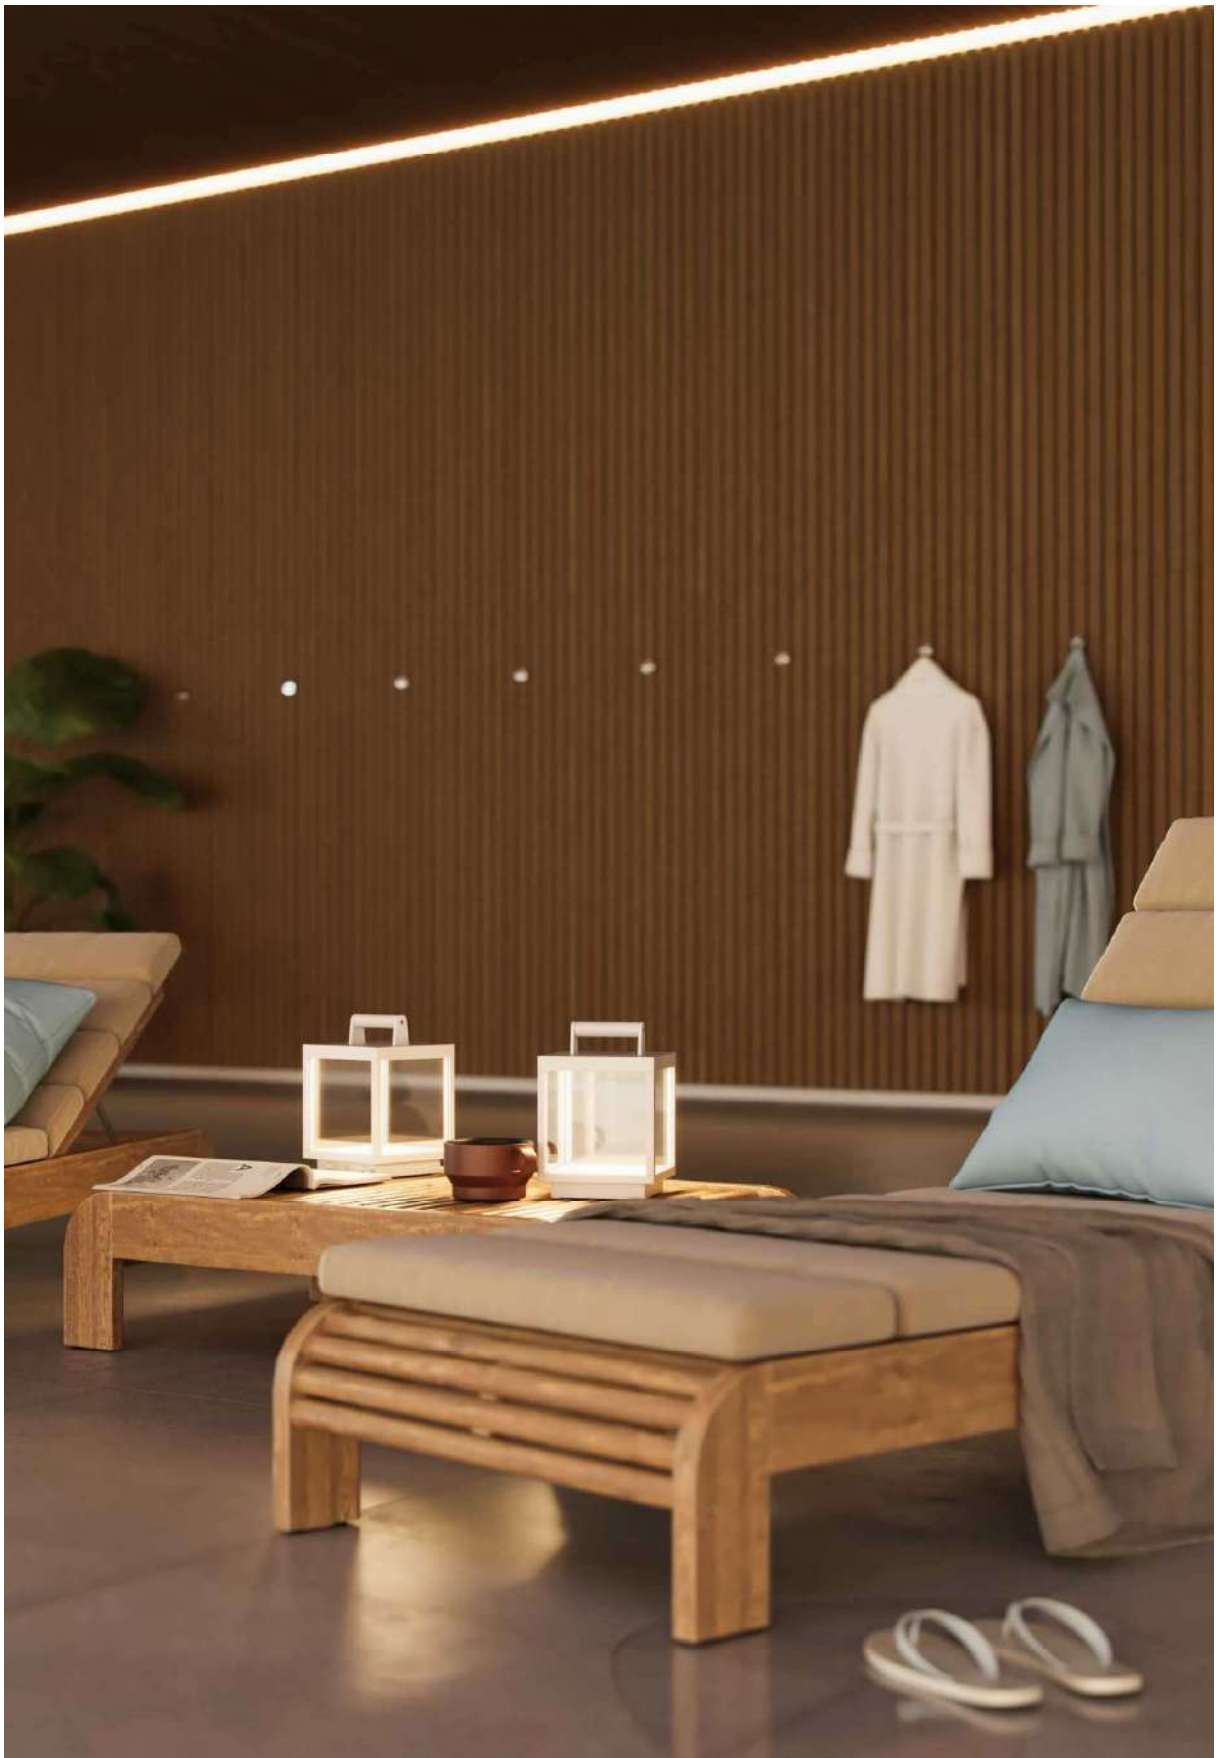

Visor



Technical Information

Power	5W
Installation	Portable
Color Temperature	3,000K
Lumens	460 lm / 230 lm / 46 lm
Material	Aluminium
Finishes	White / Corten
Code	☐ 3929
	☒ 3931



*Charger by USB. Charger included.

3 YEARS WARRANTY BATTERY 2 YEARS

30,000 HOURS

POWER BANK

6,5 HOURS

5/11/25 HOURS

3,7V USB

7,800 mAh

IP 65

CRI ≥80

120°


IK05

3 INTENSITIES


+45°C

-20°C

1/4

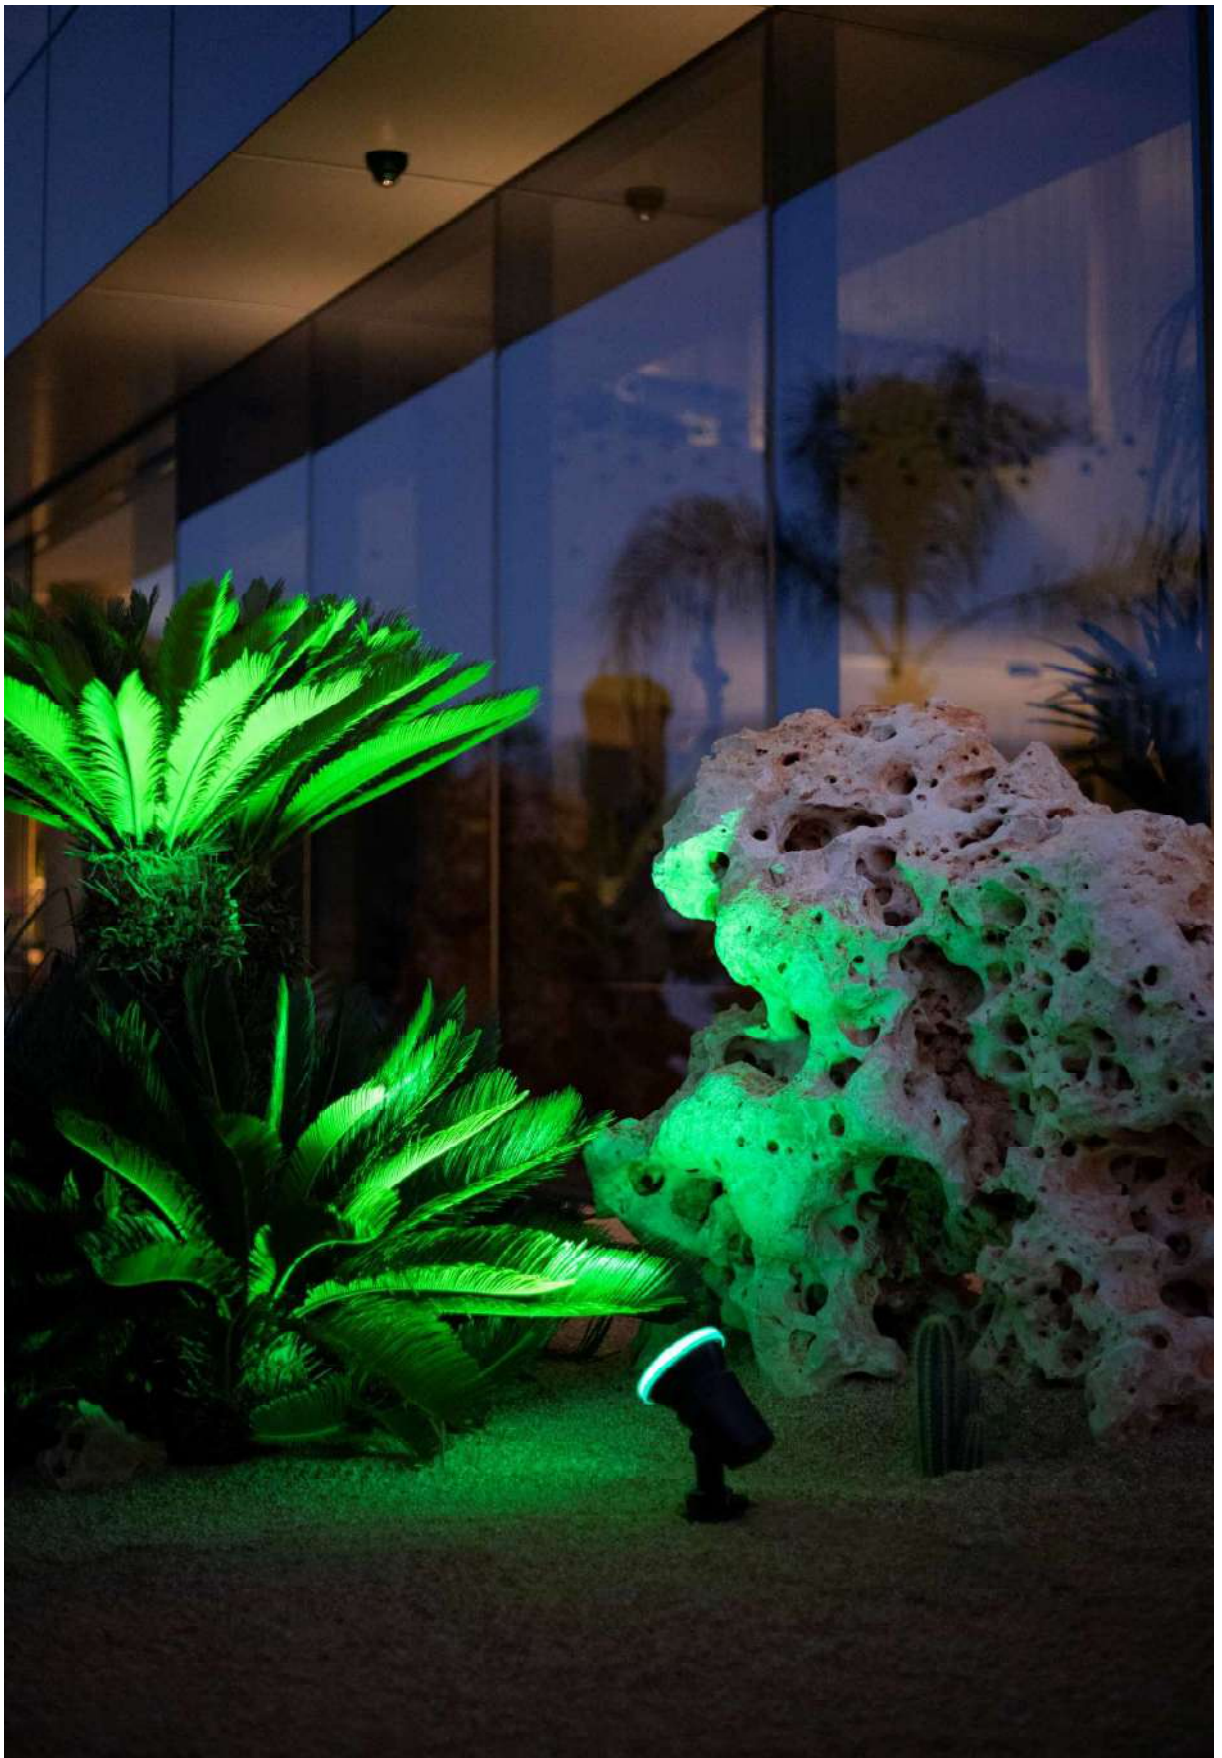


Fix



Technical Information

Installation	Surface / Floor
Material	Polypropylene
Finishes	Black
Lamp Holder	E27

Code	■ 4820
------	--------



*Spike included. Recomended lamp Par 38 (page 704).

3 YEARS
WARRANTY

| IP
65


| 50/60
Hz

| 1/6




Sair 10W

Sair 20W

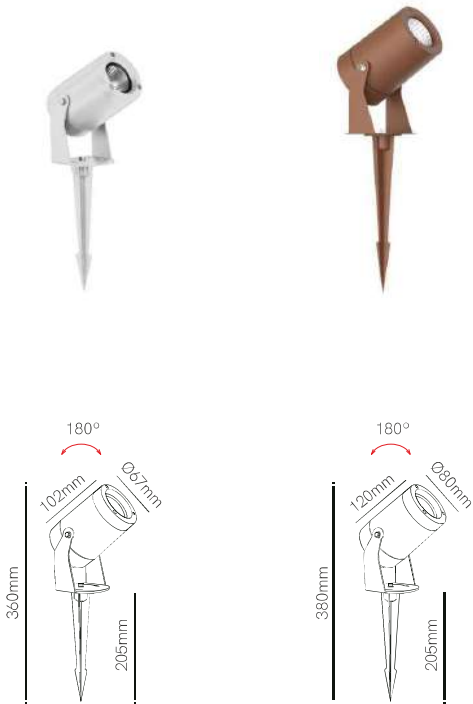

Technical Information

Power	10W	20W
Installation	Floor	Floor
Color Temperature	3,000K	3,000K
Lumens	900 lm	1,500 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Corten	White / Black / Corten
Code	4894 4895 4896 New	4897 4898 4899 New



*Spike included.

3 YEARS WARRANTY

20,000 HOURS

IP 65

100/265 VAC

PF >0,9

CRI ≥95

CABLE 24CM

18°

50/60 Hz


IK05

+40°C
-20°C

1/20



Caddie



Technical Information

Power	3W
Installation	Floor
Color Temperature	3,000K
Lumens	270 lm
Material	Aluminium
Finishes	Black / Corten
Code	■ 3581
	■ 4923



*Spike included.

3 YEARS WARRANTY

35,000 HOURS

IP 65

100/277 VAC

PF >0,6

CRI ≥72

CABLE 24CM

45°


50/60 Hz

+40°C
-20°C

1/50



Fade



Technical Information

Power	5W
Installation	Floor
Color Temperature	3,000K
Lumens	450 lm
Material	Aluminium
Finishes	Black / Corten
Code	■ 3580
	■ 4924



*Spike included.

3 YEARS WARRANTY

35,000 HOURS

IP 65

100/277 VAC

PF >0,6


CRI ≥80

CABLE 24CM


45°

50/60 Hz


1/50

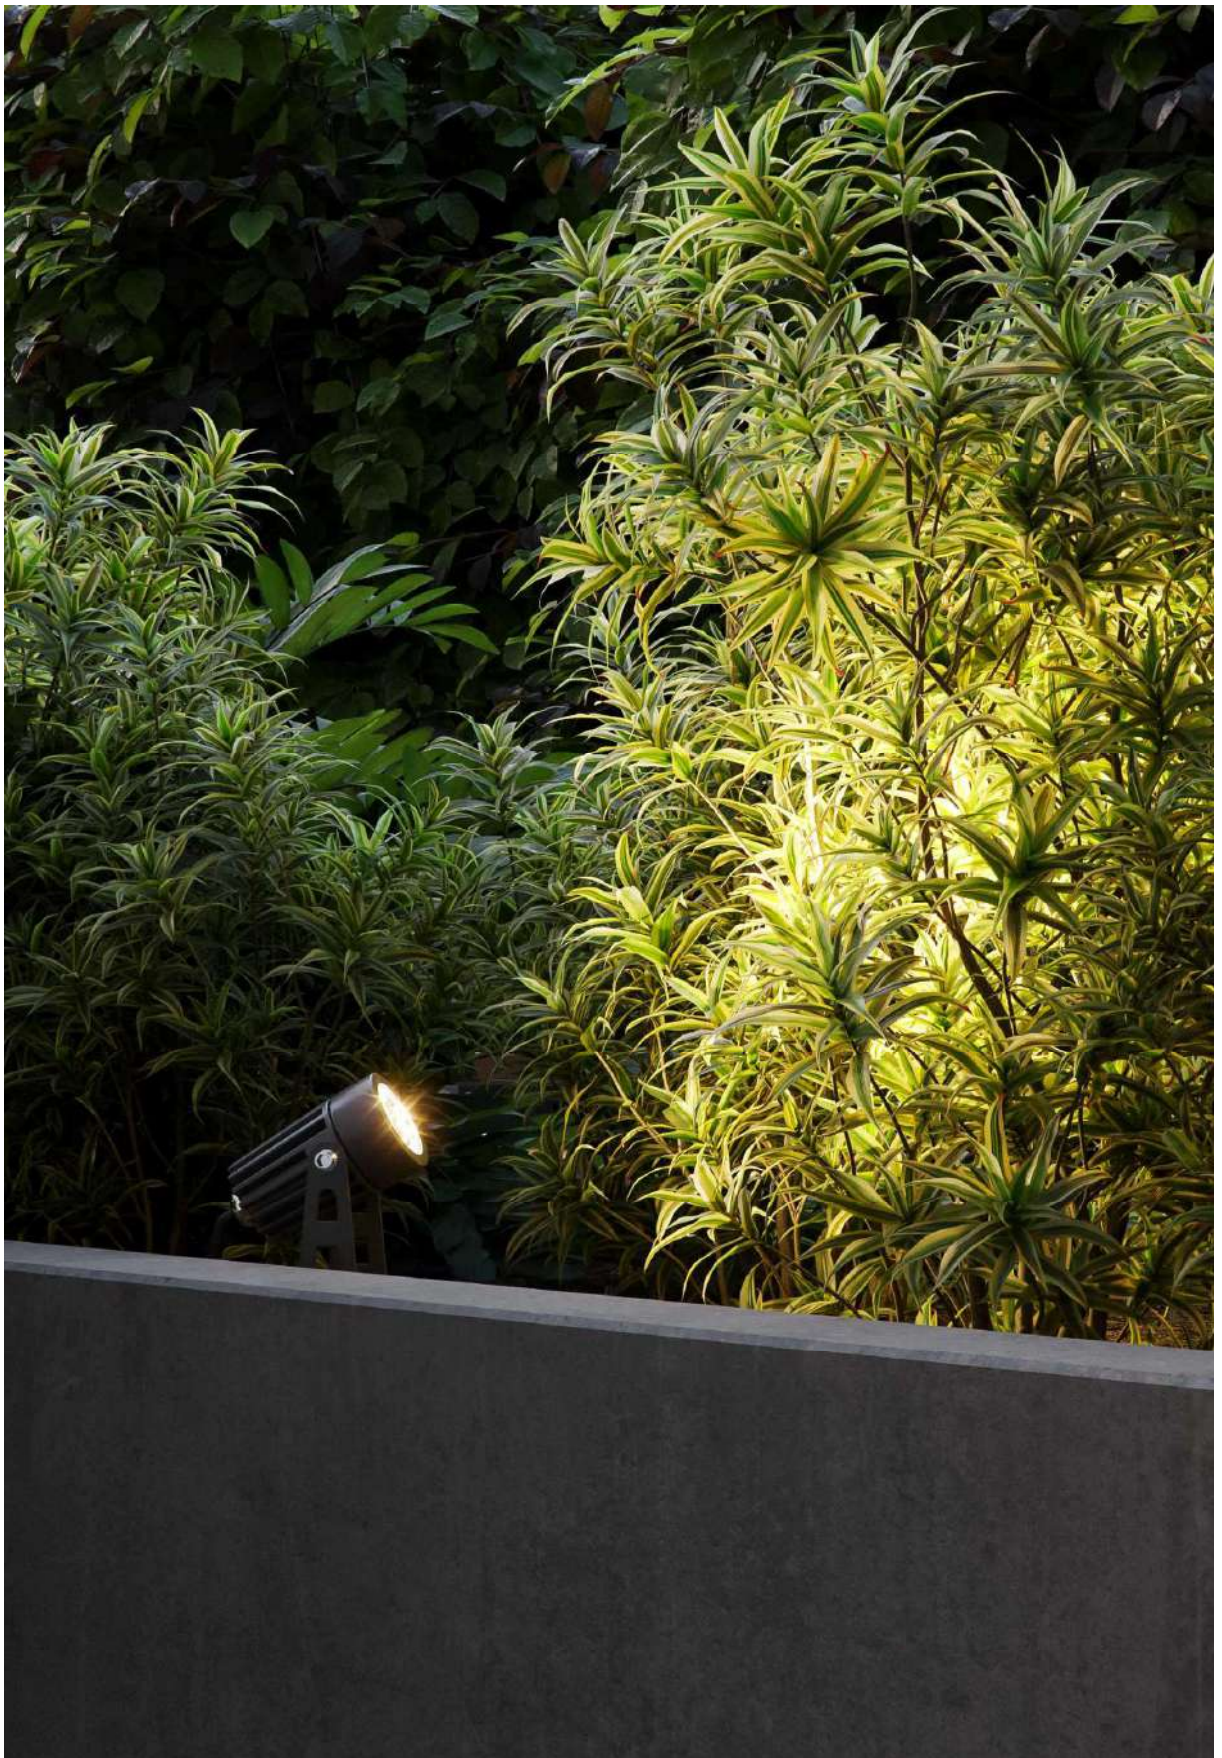

Zas round



Zas square



Technical Information

Power	3W	7W
Installation	Floor	Floor
Color Temperature	3,000K	3,000K
Lumens	240 lm	450 lm
Material	Aluminium	Aluminium
Finishes	Black / Corten	White / Black / Corten
Code	 4134	 4690
	 4922	 4692
		 4693

100/277 VAC | 20,000 HOURS | PF >0,6 | 30° | IK05 | 220/240 VAC | 30,000 HOURS | PF >0,9 | 40° | IK08




*Spike included.

3 YEARS WARRANTY | IP 65 |  →  | CRI ≥80 |  | CABLE 24CM | 50/60 Hz |  +40°C -20°C |  1/50



Sky with spike

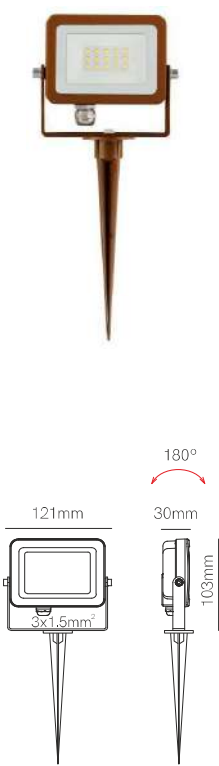

Technical Information

Power	10W
Installation	Floor
Color Temperature	3,000K / GREEN
Lumens	1,000 lm / 820 lm
Material	Aluminium
Finishes	Corten
Code	3,000K 4340 GREEN 4341



*Spike included.

5 YEARS WARRANTY

50,000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

115°

50/60 Hz

IK08

+45°C
-20°C



AKZO NOBEL

>1KV



Sky switch 10W

Sky switch 20W




Technical Information

Power	10W	20W
Installation	Surface	Surface
Color Temperature	Switch 3,000K / 4,000K / 5,000K	Switch 3,000K / 4,000K / 5,000K
Lumens	1,200 lm	2,400 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black / Gray
Code	4679 4680 4681	4682 4683 4684

1/32

1/24

Accessories



3 YEARS WARRANTY

25,000 HOURS

 → 

IP 65

180/260 VAC

PF >0,9

CRI ≥80



115°



50/60 Hz



IK08



+45°C
-20°C

AKZO NOBEL




CCT SWITCH

>1KV



Sky switch 30W

Sky switch 40W


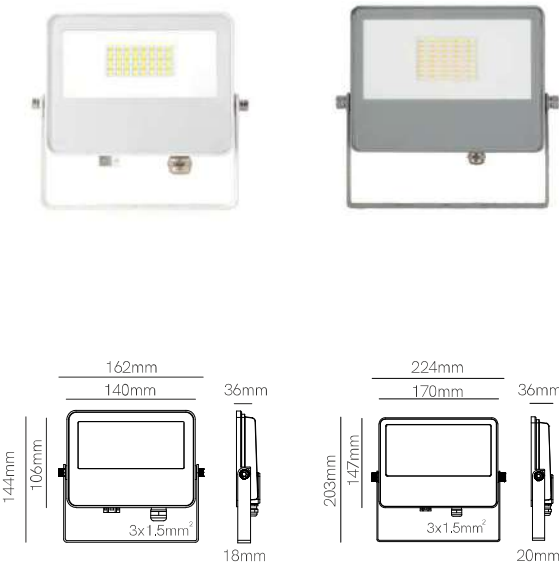



Technical Information




Power	30W	40W
Installation	Surface	Surface
Color Temperature	Switch 3,000K / 4,000K / 5,000K	Switch 3,000K / 4,000K / 5,000K
Lumens	3,600 lm	4,800 lm
Material	Aluminium	Aluminium
Finishes	White / Black / Gray	White / Black / Gray
Code	□ 4685 ■ 4686 ■ 4687	□ 4688 ■ 4689 ■ 4694



Accessories



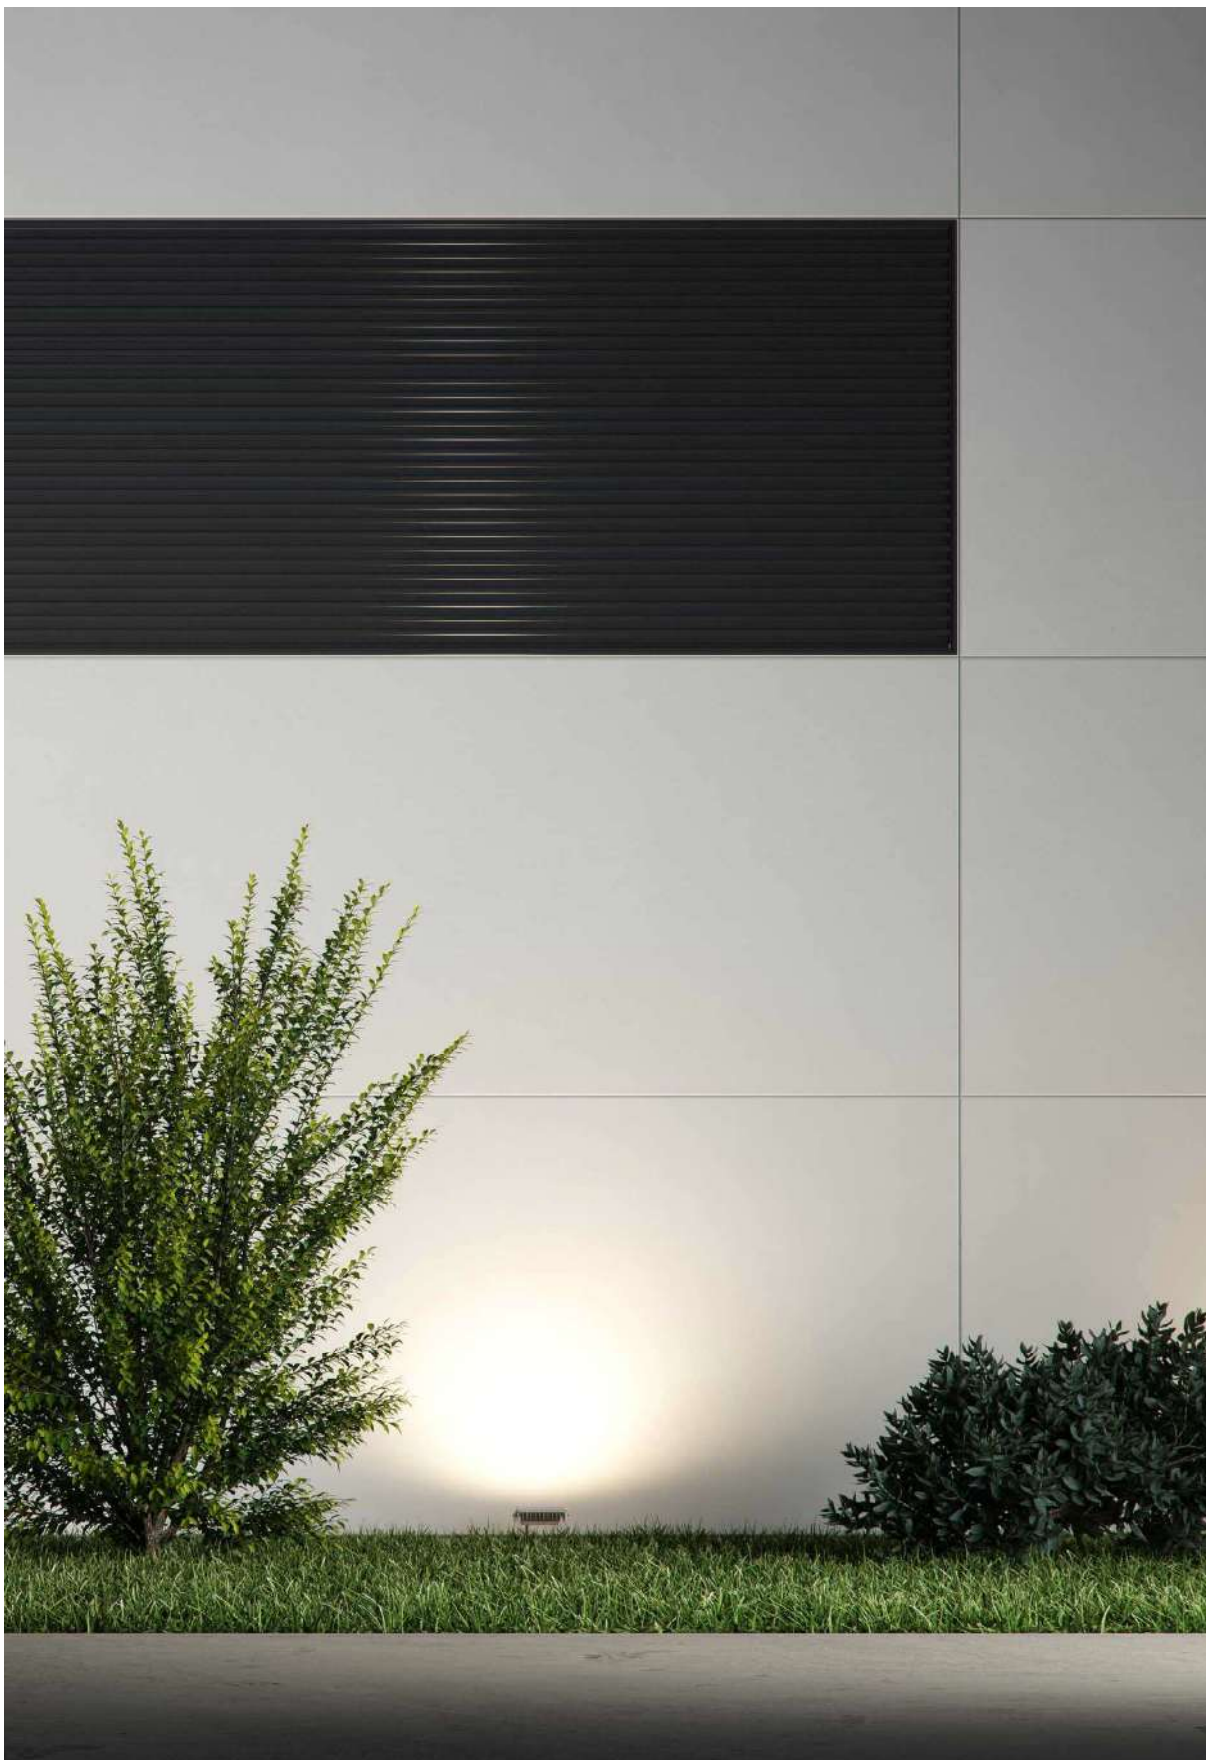



Sky microwave sensor
10WSky microwave sensor
30WSky microwave sensor
50W

Technical Information

Power	10W	30W	50W
Installation	Surface	Surface	Surface
Color Temperature	4,000K / 5,000K	4,000K / 5,000K	4,000K / 5,000K
Lumens	1,150 lm / 1,200 lm	3,550 lm / 3,600 lm	5,950 lm / 6,000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Code	☐ 4,000K 4349 ☐ 5,000K 4350 ☒ 4,000K 4308 ☒ 5,000K 4351	☐ 4,000K 4352 ☐ 5,000K 4353 ☒ 4,000K 4309 ☒ 5,000K 4310	☐ 4,000K 4354 ☐ 5,000K 4355 ☒ 4,000K 4311 ☒ 5,000K 4356



Accessories



5 YEARS WARRANTY | 50,000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | | 115° | | 50/60 Hz | | +45°C / -20°C | AKZO NOBEL | MICROWAVE SENSOR | 5 sec / 5 min | 1m / 7m | ON / OFF | >1KV






Sky 10W



Sky 20W



Sky 30W



Technical Information


Power	10W	20W	30W
Installation	Surface	Surface	Surface
Color Temperature	5,000K	2,700K / 4,000K / 5,000K	2,700K / 4,000K / 5,000K
Lumens	1,150 lm	2,250 lm / 2,400 lm / 2,450 lm	3,450 lm / 3,600 lm / 3,650 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	Black / Corten	Gray / Corten
Code	□ 5,000K4254 ■ 5,000K4257	■ 5,000K4266 ■ 2,700K4401 ■ 4,000K4402	■ 3,000K4276 ■ 2,700K4279 ■ 4,000K4280

1/36

1/32

1/24

Accessories



5 YEARS WARRANTY

50,000 HOURS

IP 65

220/240 VAC

PF >0,9

CRI ≥80

115°

50/60 Hz

IK08

+45°C
-20°C

AKZO NOBEL

>1KV




Sky 100W



Sky 150W



Sky 200W



Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	2.200K	2.200K	2.200K
Lumens	7.000 lm	11.000 lm	14.000 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black
Code	■ 3955	■ 3956	■ 3957
	1/4	1/2	1/2




5 YEARS WARRANTY | 50,000 HOURS |  →  | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 |  115° | 50/60 Hz |  IK08 |  +45°C -20°C | AKZO NOBEL | >2KV 




Club Tennis Olesa, Olesa de Montserrat, Design: Padel 10. (Spain).


Polaris 100W



Polaris 150W



Polaris 200W



Technical Information

Power	100W	150W	200W
Installation	Surface	Surface	Surface
Color Temperature	3.000K / 4.000K / 5.000K	3.000K / 4.000K / 5.000K	3.000K / 4.000K / 5.000K
Lumens	12,700 lm / 13,000 lm / 13,200 lm	19,200 lm / 19,500 lm / 19,700 lm	25,700 lm / 26,000 lm / 26,200 lm
Material	Aluminium	Aluminium	Aluminium
Finishes	Black	Black	Black

Code	■ 3.000K	4513	■ 3.000K	4516	■ 3.000K	4519
	■ 4.000K	4514	■ 4.000K	4517	■ 4.000K	4520
	■ 5.000K	4515	■ 5.000K	4518	■ 5.000K	4521





5 YEARS WARRANTY | 50,000 HOURS | → | IP 65 | 220/240 VAC | PF >0,9 | CRI ≥80 | 115° | 50/60 Hz | IK08 | +45°C / -20°C | AKZO NOBEL | >6KV



Krion 300W

Krion 400W



5m	10m	15m	20m
380 lx	100 lx	45 lx	25 lx

5m	10m	15m	20m
470 lx	120 lx	55 lx	30 lx



Technical Information

Power
Installation
Color Temperature
Lumens
Material
Finishes


300W
Surface
4,000K / 5,000K
39,000 lm / 39,300 lm
Aluminium
Black

400W
Surface
4,000K / 5,000K
52,000 lm / 52,300 lm
Aluminium
Black

Code

■	4,000K	4509
■	5,000K	4511

■	4,000K	4510
■	5,000K	4512



5 YEARS WARRANTY

50,000 HOURS

IP 65

100/277 VAC

PF >0,9

CRI ≥80

80°x140°

50/60 Hz

IK10

+45°C -25°C


AKZO NOBEL

>6KV

1



Wech

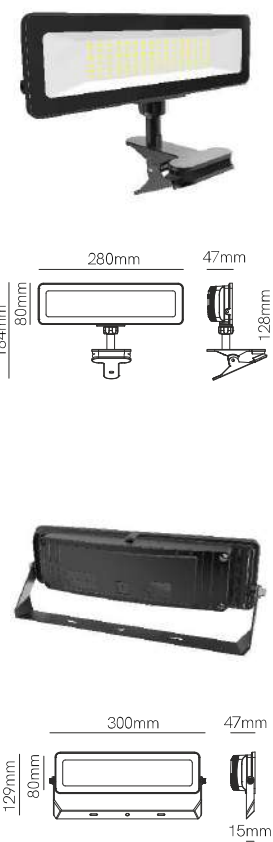

Technical Information

Power	10W
Installation	Portable
Color Temperature	Switch 3,000K / 4,000K / 5,000K
Lumens	600 lm
Material	Aluminium & Polycarbonate
Finishes	White / Black
Code	☐ 5004 ☒ 5005



Clamp, lyre and charger included.





New

Madi



55mm



130mm

130mm



Technical Information

Power	4W
Installation	Portable
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	600 lm
Material	Polycarbonate and ABS
Finishes	White

Code ☐ 5154



3 YEARS WARRANTY

2 YEARS WARRANTY

POWER BANK

SOS

3-4 HOURS

100% 6-7H
50% 12-15H
SOS 16-18H

USB-C 5V 2A

5,200 mAh

IP 54

CRI ≥80

200°


DIMMABLE

IK08

+40°C
-10°C

CCT SWITCH

1

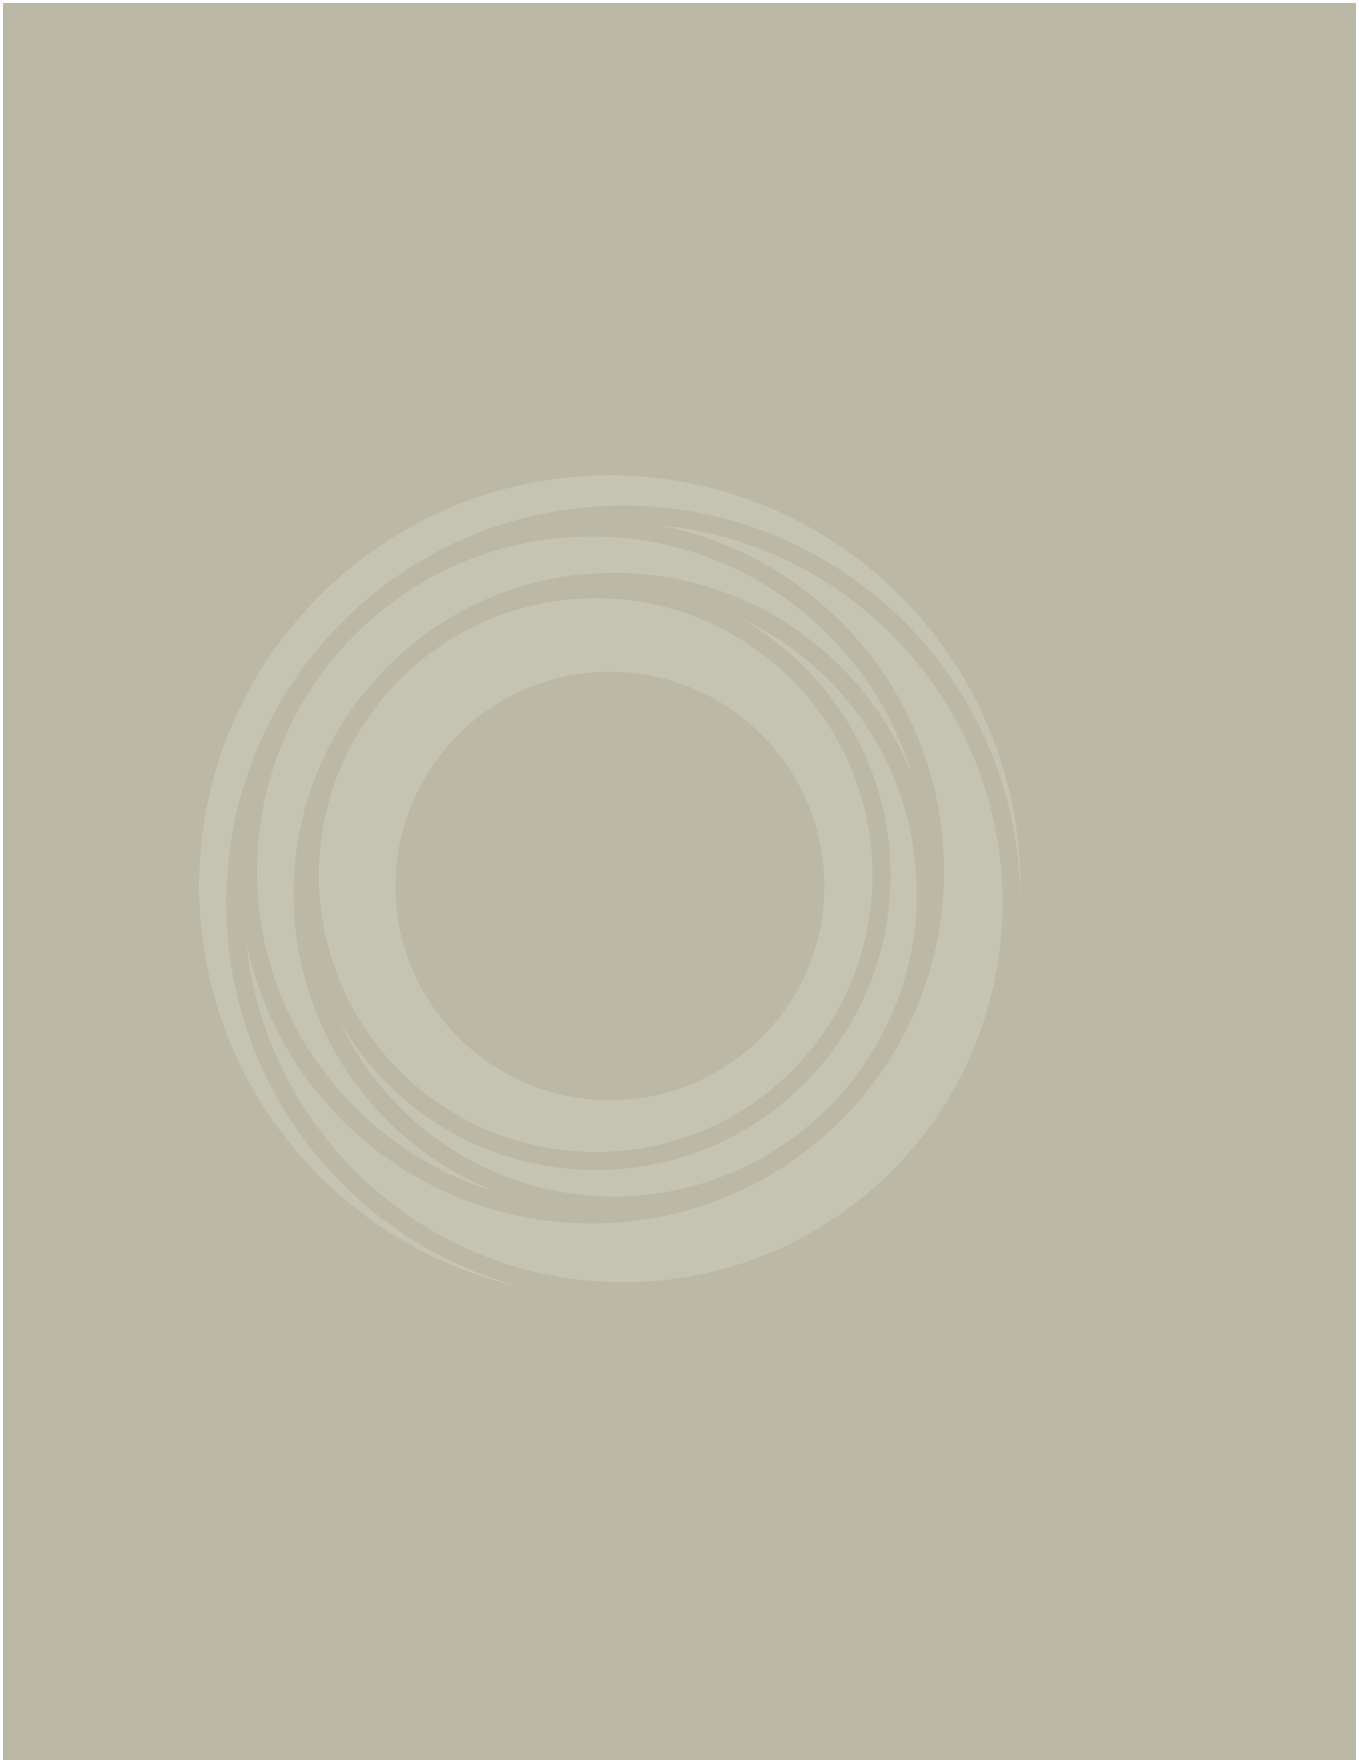


Solar lighting



New

Gam



Technical Information

Power	0,7W
Installation	Floor
Color Temperature	Switch 2,700K / 3,200K / 4,000K
Lumens	85 lm
Material	ABS + PMMA
Finishes	Black

Code	■ 5178
------	--------



3 YEARS WARRANTY
BATTERY 2 YEARS

20,000 HOURS

6-8 HOURS

6-8H.

1.800 mAh

IP 54

CRI ≥80

270°


IK02

+55°C
-10°C


ON OFF

CCT SWITCH


1/50

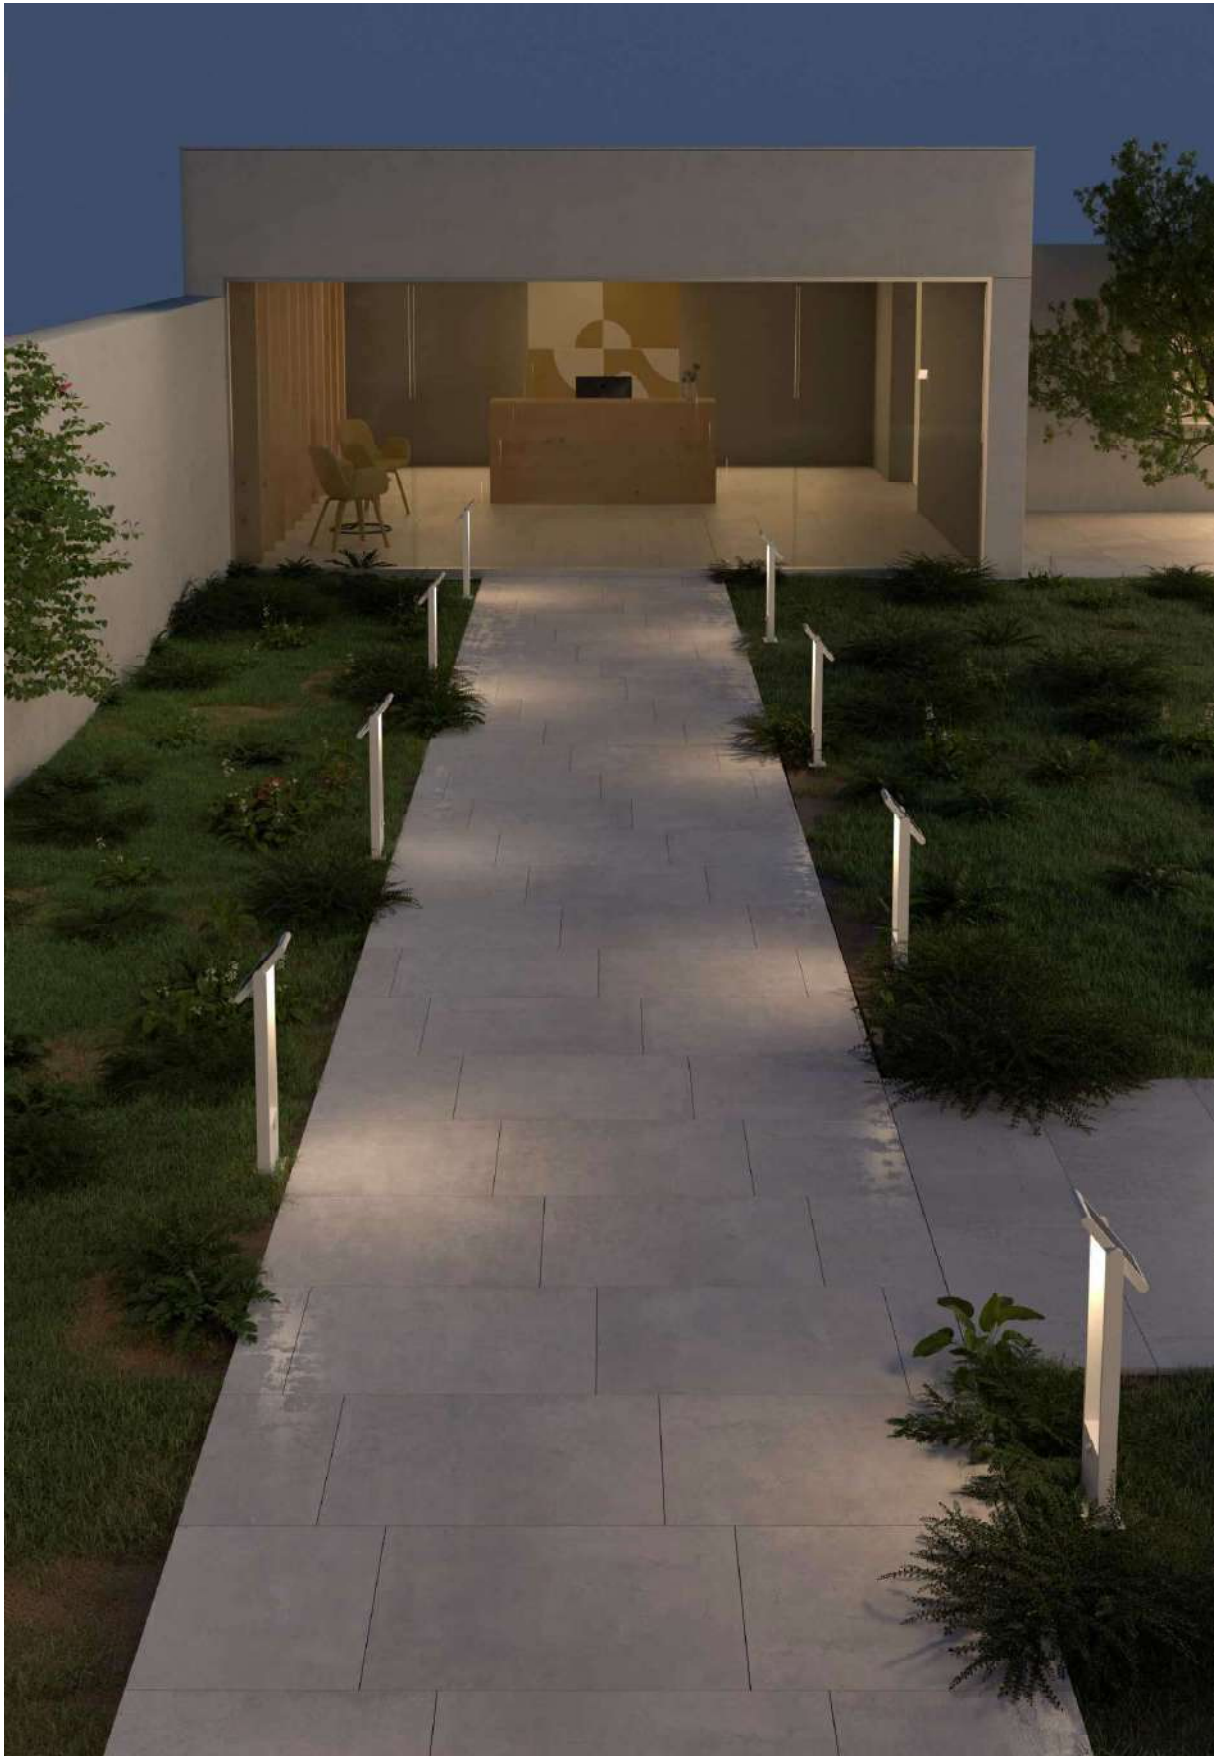

Popa 60



Popa 100

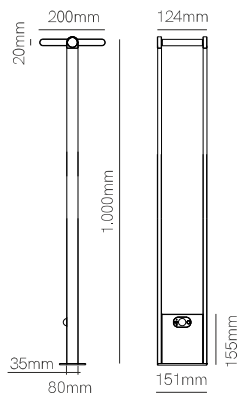

Technical Information

Power	1,6W	1,6W
Installation	Floor	Floor
Color Temperature	4.000K	4.000K
Lumens	150 lm	150 lm
Material	Aluminium	Aluminium
Finishes	White / Black	White / Black
Code	☐ 3882 ☒ 3883	☐ 3884 ☒ 3885



3 YEARS WARRANTY
BATTERY 2 YEARS

20.000 HOURS

5-6 HOURS

15% 10H. 100% 2-3H.

2.200 mAh

IP 54

CRI ≥80

120°

+45°C
-25°C


PIR SENSOR

ON OFF

8 sec 8 min

1/2

Proa



Technical Information

Power	1,6W
Installation	Surface
Color Temperature	4.000K
Lumens	150 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3531 ☒ 3532



3 YEARS WARRANTY
BATTERY 2 YEARS

20.000 HOURS

5-6 HOURS

15% 10H. 100% 2-3H.

2.200 mAh

IP 54

CRI ≥80

120°

IK08

+45°C -25°C

PIR SENSOR

ON OFF


8 sec 8 min

1/6





Egna



Technical Information

Power	3W
Installation	Surface
Color Temperature	4,000K
Lumens	250 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3587 ☒ 3592



3 YEARS
WARRANTY
BATTERY 5 YEARS

25,000
HOURS

5-6
HOURS

11%
20H. 100%
2-3H.

4,500
mAh

IP
54

CRI
≥80

120°

IK08

+45°C
-25°C


PIR
SENSOR

ON OFF

1/8



Iris



Technical Information

Power	2,5W
Installation	Surface
Color Temperature	4.000K
Lumens	174 lm
Material	Aluminium
Finishes	White / Black
Code	☐ 3496 ☒ 3497



3 YEARS WARRANTY
BATTERY 2 YEARS

20,000 HOURS

5-6 HOURS

15% 100%
10H. 2-3H.

2,200 mAh

IP 54

CRI ≥80

120°

IK08


+45°C
-25°C

PIR SENSOR


ON OFF

8 sec 8 min

1/6

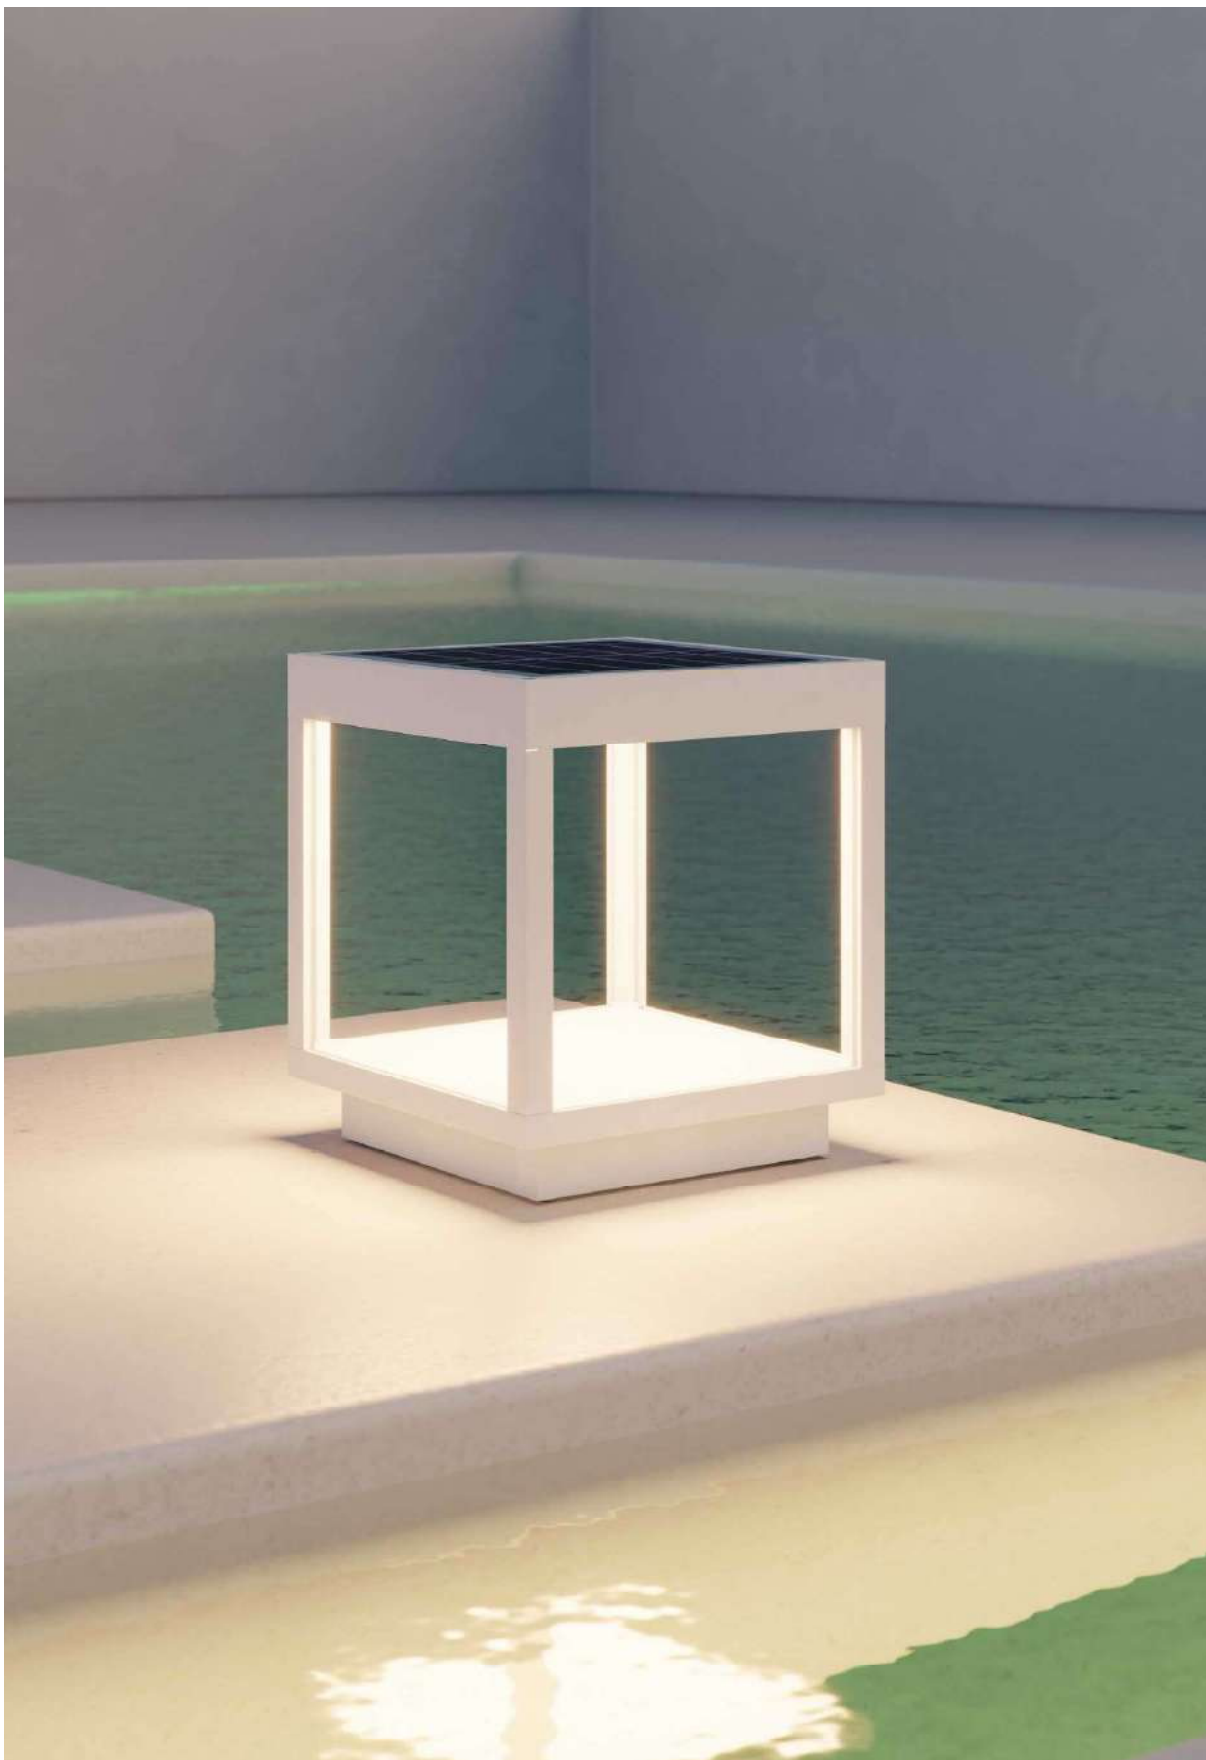

Visor solar



Technical Information

Power	3,5W
Installation	Portable
Color Temperature	3,000K
Lumens	460 lm
Material	Aluminium
Finishes	White / Black / Corten
Code	☐ 4209
	☒ 4193
	☐ 4194



3 YEARS WARRANTY
BATTERY 2 YEARS

30,000 HOURS

10 HOURS

8 HOURS

4.500 mAh

IP 65


CRI ≥80

120°

+45°C
-25°C

ON OFF


1/4

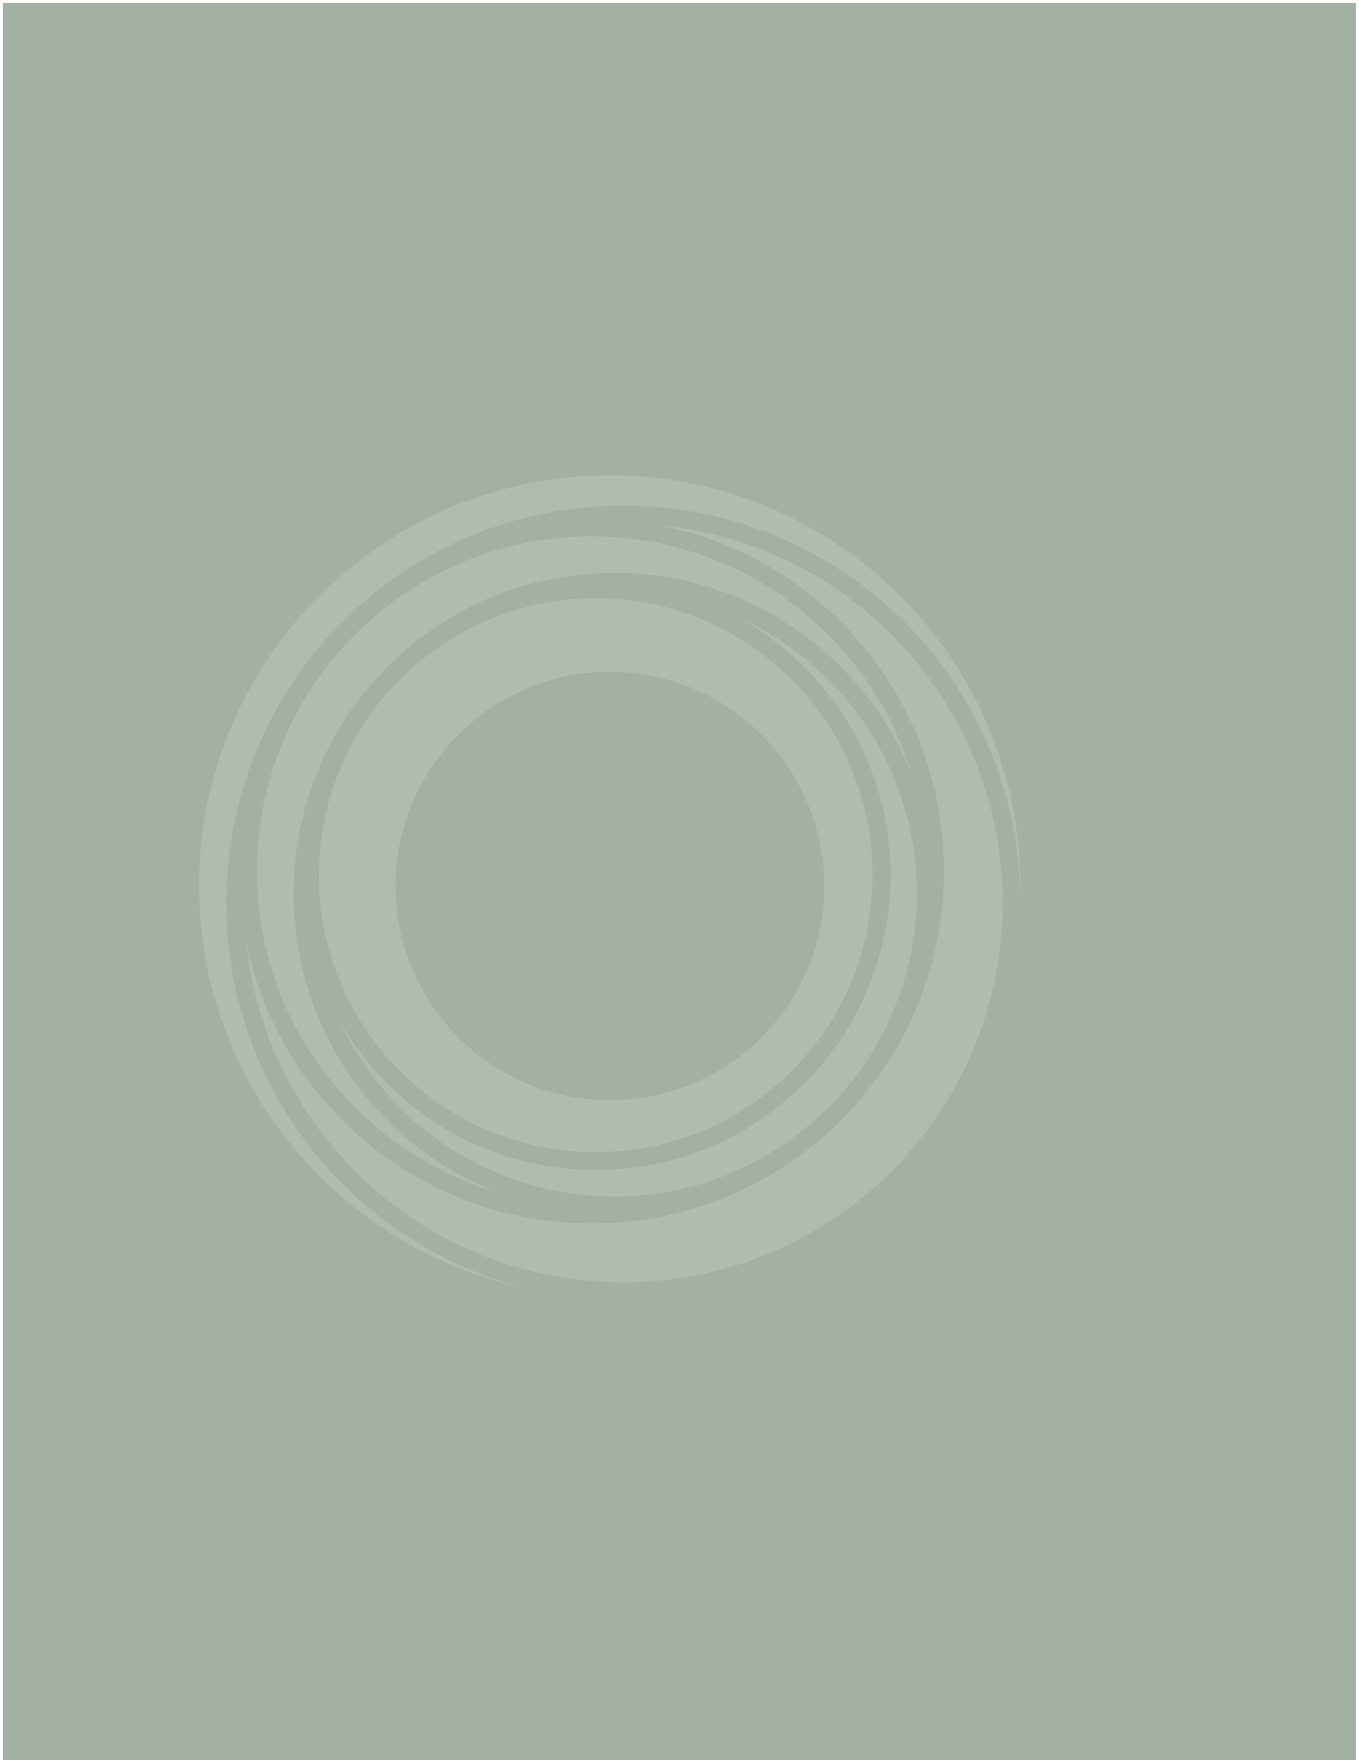


Rings




Avant round



Avant square



Avant surface round



*GU10 Bulbholder included.



Technical Information

Installation	Recessed	Recessed	Surface
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	111mm GU10	111mm GU10	111mm GU10
Code	☐ 4486 ☒ 4487  Custom RAL  Electrolytic Plating	☐ 4484 ☒ 4485  Custom RAL  Electrolytic Plating	☐ 4933 ☒ 4934  Custom RAL  Electrolytic Plating
	1/20	1/20	1/10


Custom RALElectrolytic Plating

ⓘ Consult delivery terms and conditions.


3 YEARS WARRANTY | IP 20



One recessed



One surface



*GU10 Bulbholder included, except 258226C.



Technical Information

Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Brushed alumin.	White / Black
Bulbholder	50mm GU10	50mm GU10
Code	☐ 4478 ☒ 4479 ☐ 258226C ☒  Custom RAL ☒  Electrolytic Plating	☐ 4480 ☒ 4481 ☒  Custom RAL ☒  Electrolytic Plating

1/50

1/20



ⓘ Consult delivery terms and conditions.



3 YEARS WARRANTY | IP 20



Zio recessed



Zio surface



*GU10 Bulbholder included, except 257226C.



Technical Information

Installation	Recessed	Surface
Material	Aluminium	Aluminium
Finishes	White / Black / Brushed alumin.	White / Black
Bulbholder	50mm GU10	50mm GU10
Code	☐ 4476 ☒ 4477 ☐ 257226C ☒ Custom RAL ☒ Electrolytic Plating	☐ 4482 ☒ 4483 ☒ Custom RAL ☒ Electrolytic Plating

1/50

1/20




ⓘ Consult delivery terms and conditions.

3 YEARS WARRANTY | IP 20



Rok



*G5,3 Bulbholder included.



Technical Information

Installation	Recessed
Material	Aluminium
Finishes	White / Black / Brushed chrome
Bulbholder	50mm G5,3
Code	☐ 4755 ☒ 4756 ☐ 4757 ☒  Custom RAL ☒  Electrolytic Plating



 Consult delivery terms and conditions.

3 YEARS
WARRANTY

| IP
65

|  1/50






Luk round IP20



Luk round IP65



Luk square IP65



*IP20 includes GU10 Bulbholder, IP65 includes G5.3 Bulbholder.



Technical Information

Installation	Recessed	Recessed	Recessed
Material	Aluminium	Aluminium	Aluminium
Finishes	White / Black	White / Black	White / Black
Bulbholder	50mm GU10	50mm G5.3	50mm G5.3
Code	☐ 4758 ☒ 4759  Custom RAL  Electrolytic Plating	☐ 5214 ☒ 5215  Custom RAL  Electrolytic Plating	☐ 5216 ☒ 5217  Custom RAL  Electrolytic Plating
	IP 20	IP 65	IP 65


Custom RALElectrolytic Plating

Consult delivery terms and conditions.





Bathroom



*G5.3 Bulbholder included.



Technical Information


Installation	Recessed
Material	Aluminium
Finishes	White / Brushed aluminium
Bulbholder	50mm G5.3
Code	☐ 223232
	☒ 223233



3 YEARS WARRANTY | IP 44 | 1/50



Eclipse



*G5.3 Bulbholder included.



Technical Information

Installation	Recessed
Material	Aluminium
Finishes	White / Gray / Brushed chrome
Bulbholder	50mm G5.3

Code	☐	222232
	☐	222230
	☐	222238
	☒	Custom RAL

ⓘ Consult delivery terms and conditions.

Accessories




Bulbholder GU10
301182 ☐



3 YEARS WARRANTY | IP 20 | 1/50



Basculante



*G5.3 Bulbholder included.

Technical Information

Installation	Recessed
Material	Aluminium
Finishes	White / Gray / Brushed chrome
Bulbholder	50mm G5.3

Code	☐ 205280
	☐ 205284
	☐ 205285
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.


Accessories




Bulbholder GU10
301182 ☐



3 YEARS WARRANTY | IP 20 | 1/50

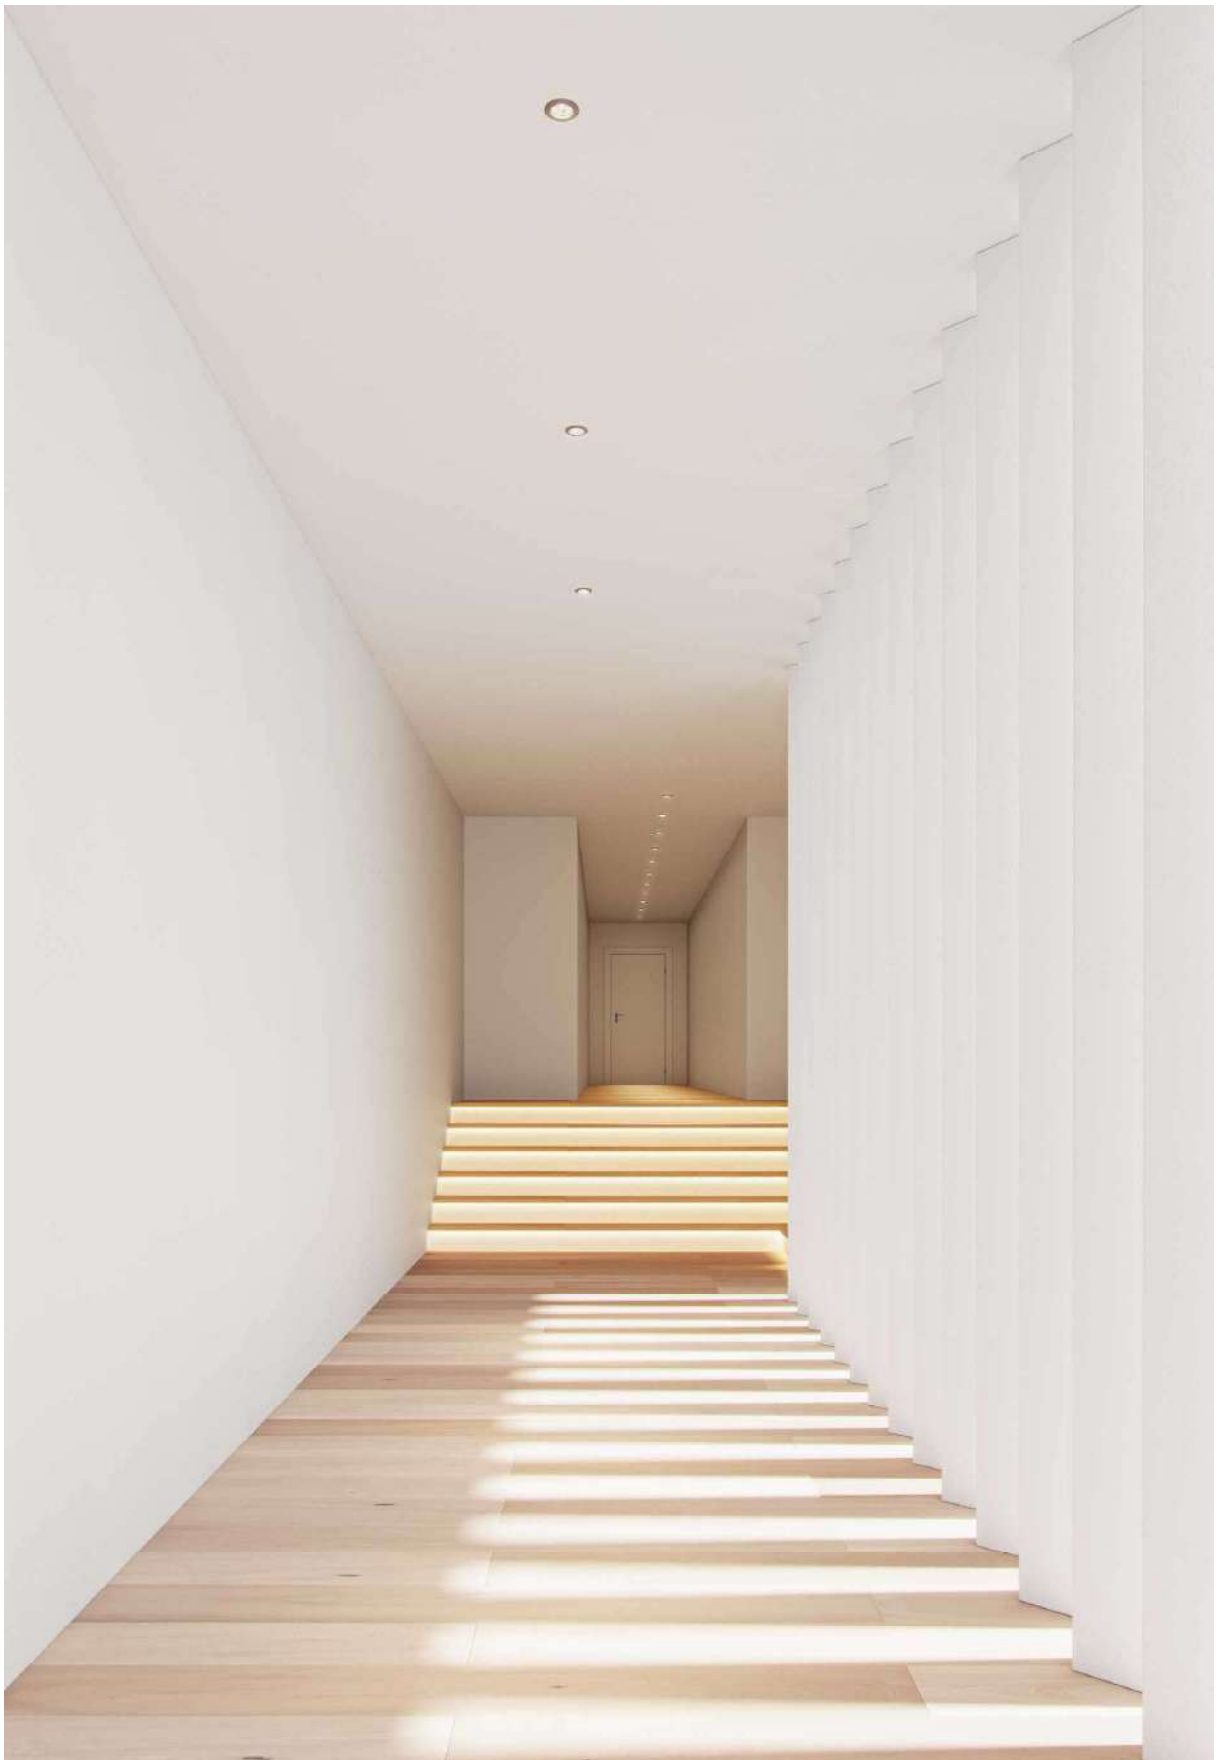

Fijo



*G5.3 Bulbholder included.

Technical Information

Installation	Recessed
Material	Aluminium
Finishes	White / Gray / Brushed chrome
Bulbholder	50mm G5.3

Code	☐ 206280
	☐ 206284
	☐ 206285
	☒ Custom RAL

ⓘ Consult delivery terms and conditions.


Accessories



Bulbholder GU10
301182 ☐



3 YEARS WARRANTY | IP 20 | 1/50

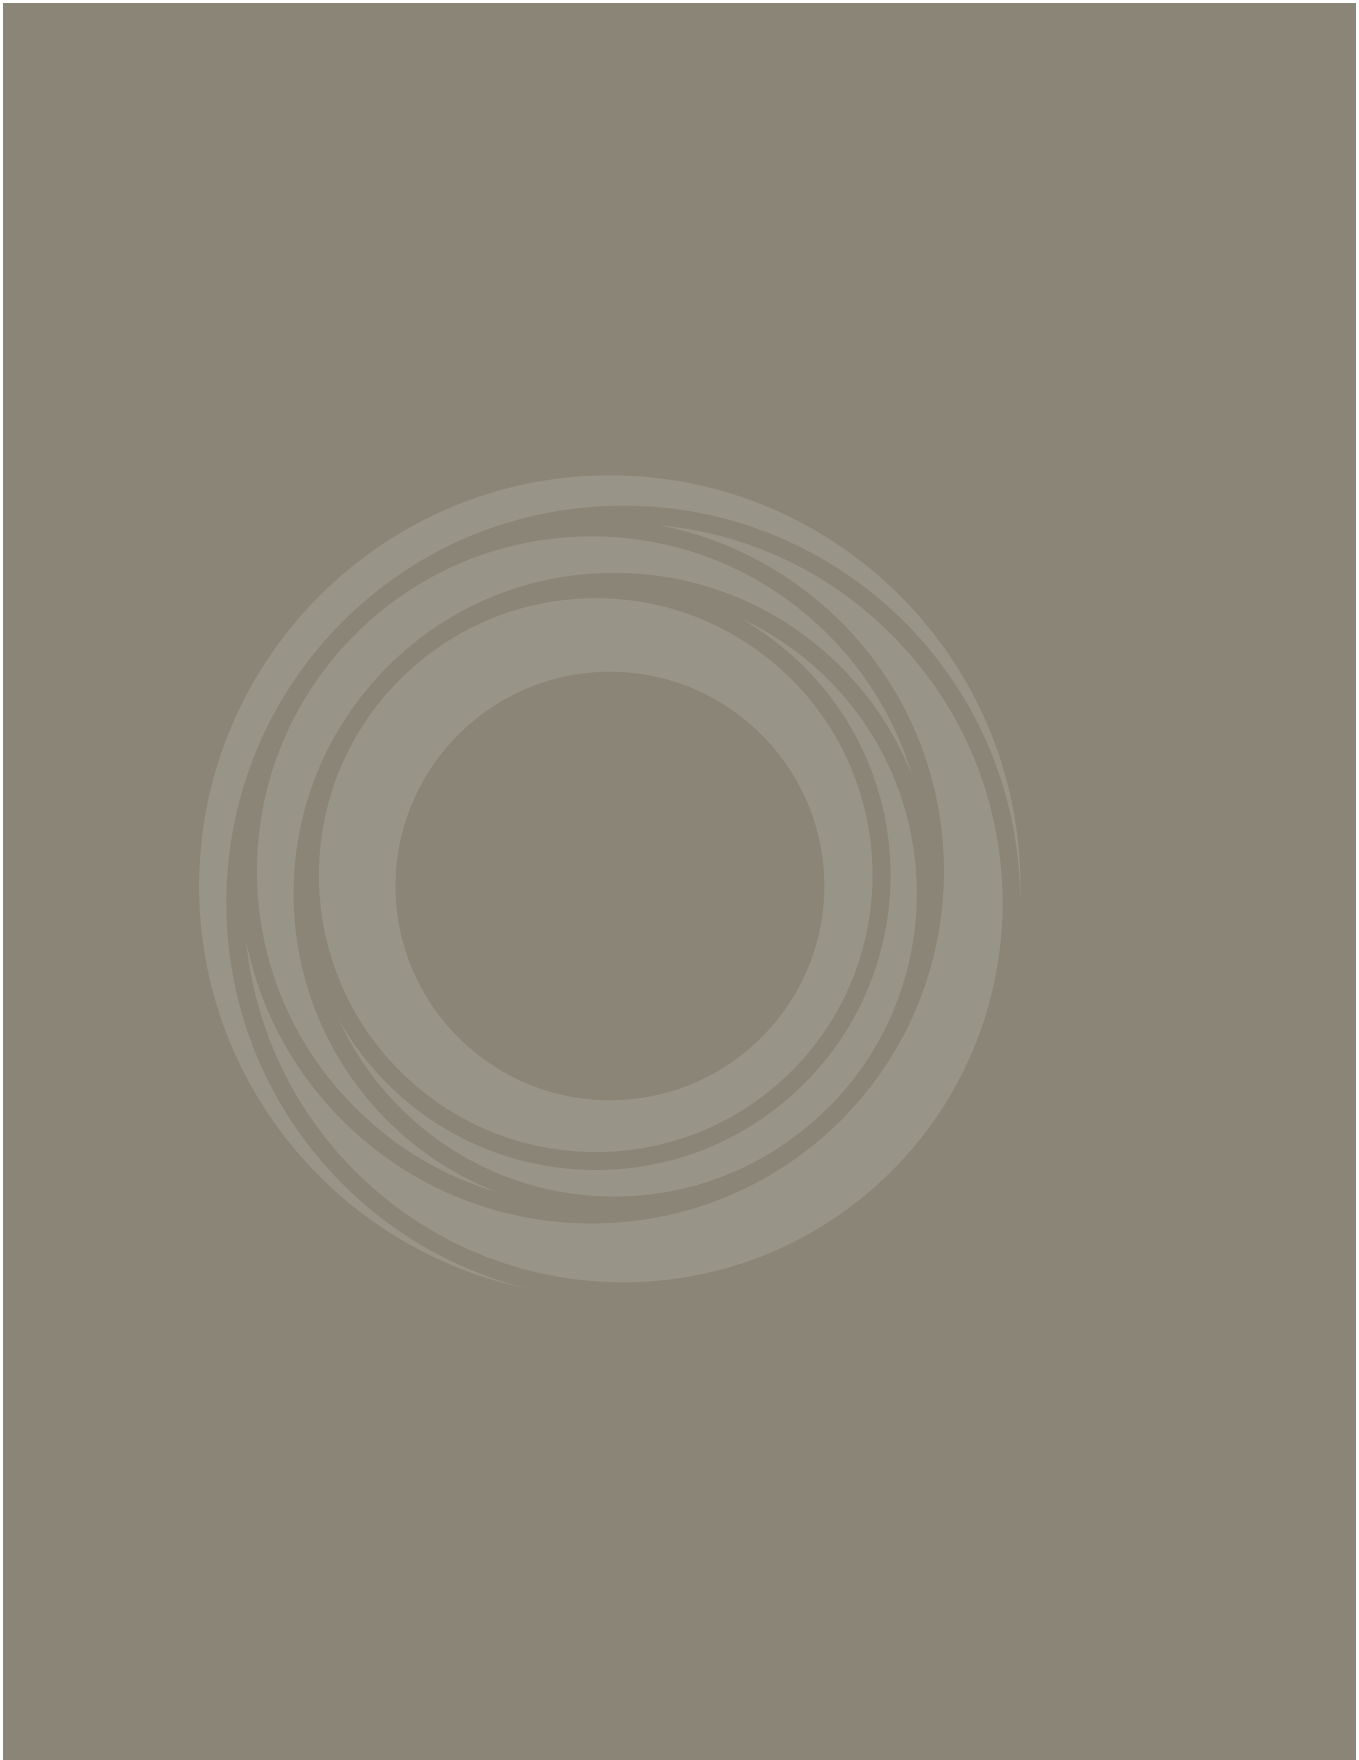

Retrofit



New


AR111 15° G53

AR111 15° GU10



Technical Information

Power	15W		15W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	1.350 lm / 1.400 lm / 1.500 lm		1.350 lm / 1.400 lm / 1.500 lm	
Code	2.700K	5187	2.700K	5190
	3.000K	5188	3.000K	5191
	4.000K	5189	4.000K	5192
PF >0,5		12V AC/DC	PF >0,9	
			220/240 VAC	



3 YEARS WARRANTY | 15.000 HOURS | IP 20 | CRI ≥80 | 15° | 50/60 Hz | +40°C / -20°C | 10/30

Nitro GU10

Dole GU10



Technical Information

Power	15W	15W
Color Temperature	2.700K	2.700K / 3.000K / 4.000K
Lumens	1.000 lm	1.050 lm / 1.100 lm / 1.120 lm
Code	3470	2.700K 3467
		3.000K 3468
		4.000K 3469



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C / -20°C | 10/30

Lynk G53


Lynk GU10

Lynk GU10 dimmable




Technical Information

Power	13W		13W		13W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	880 lm / 900 lm / 950 lm		880 lm / 900 lm / 950 lm		880 lm / 900 lm / 950 lm	
Code	2.700K	3452	2.700K	3455	2.700K	3464
	3.000K	3453	3.000K	3456	3.000K	3465
	4.000K	3454	4.000K	3457	4.000K	3466
		12V AC/DC			220/240 VAC	220/240 VAC TRIAC DIMM



3 YEARS WARRANTY | 25,000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 45° | 50/60 Hz | +40°C / -20°C | 10/30

Max BA15d



Technical Information

Power	7W
Color Temperature	2.700K
Lumens	500 lm
Code	3569




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 24° | 50/60 Hz | +40°C -20°C | 6/30

Power MR16


Power GU10

Power GU10 dimmable

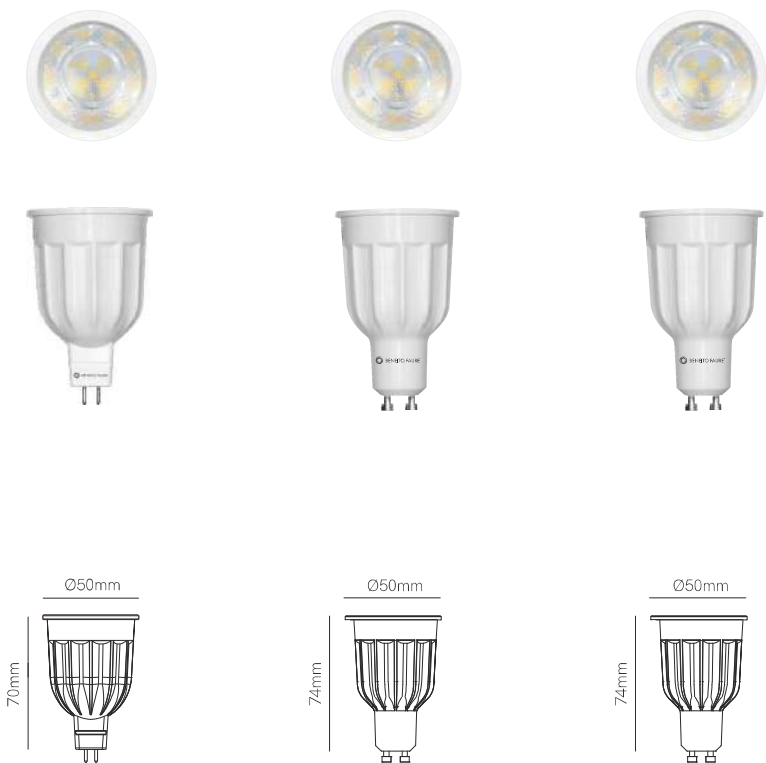

Technical Information

Power	12W	10W / 12W	12W
Color Temperature	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K	2.700K / 3.000K / 4.000K
Lumens	900 lm / 950 lm / 1.000 lm	950 lm / 1.000 lm / 1.050 lm	950 lm / 1.000 lm / 1.050 lm
Code	2.700K 3441 3.000K 3442 4.000K 3443	12W 2.700K 3438 10W 3.000K 4295 10W 4.000K 4296	2.700K 3489 3.000K 3490 4.000K 3491
	12V AC/DC	220/240 VAC	220/240 VAC TRIAC DIMM




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C / -20°C | 10/50

System MR16


System GU10

System GU10 dimmable

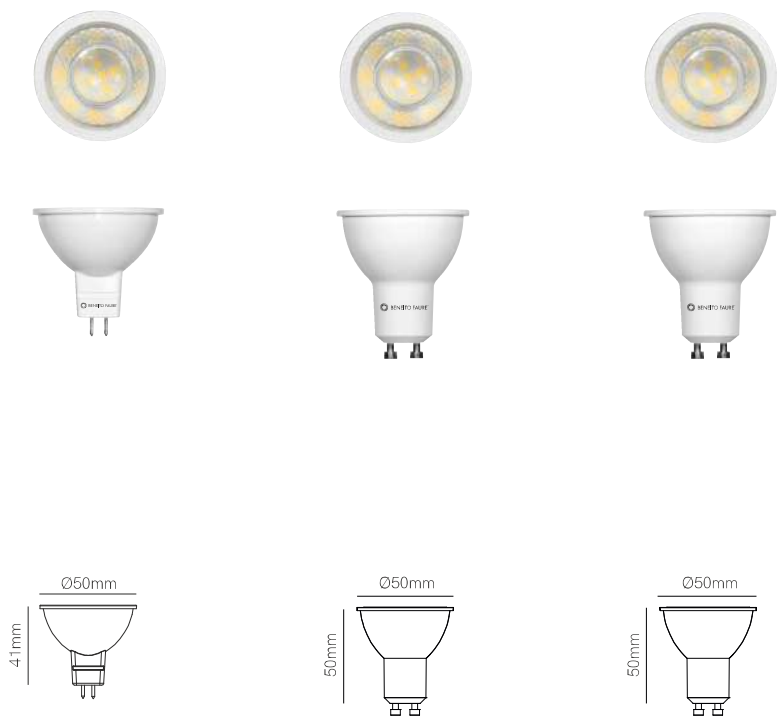

Technical Information



Power	8W		8W		8W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	725 lm / 780 lm / 825 lm		725 lm / 780 lm / 825 lm		660 lm / 700 lm / 750 lm	
Code	2.700K	3435-N	2.700K	3432-N	2.700K	3492-N
	3.000K	3436-N	3.000K	3433-N	3.000K	3493-N
	4.000K	3437-N	4.000K	3434-N	4.000K	3494-N
		12V AC/DC			220/240 VAC	220/240 VAC TRIAC DIMM



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C / -20°C | 10/50


Hook GU10

Hook GU10 dimmable



Technical Information

Power	6W		6W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	570 lm / 594 lm / 616 lm		570 lm / 594 lm / 616 lm	
Code	2.700K	4023	2.700K	3654-N
	3.000K	4024	3.000K	3655-N
	4.000K	4025	4.000K	3656-N



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C / -20°C | 10/50

Uniform-line MR16



Uniform-line GU10



Uniform-line GU10
dimmable



Technical Information

Power	6W		6W	6W
Color Temperature	2.700K/3.000K/4.000K/5.000K		2.700K/3.000K/4.000K/5.000K	2.700K / 3.000K / 4.000K
Lumens	480 lm/510 lm/545 lm/560 lm		480 lm/510 lm/545 lm/560 lm	490 lm / 500 lm / 530 lm
Code	2.700K	4019-V2	2.700K	4015-V2
	3.000K	4020-V2	3.000K	4016-V2
	4.000K	4021-V2	4.000K	4017-V2
	5.000K	4022-V2	5.000K	4018-V2
		12V AC/DC	220/240 VAC	220/240 VAC
				TRIAC DIMM




5 YEARS WARRANTY | 50.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 120° | 50/60 Hz | +40°C / -20°C | 10/50

Narrow GU10 dimmable



Technical Information



Power	7W	
Color Temperature	2,700K / 3,000K	
Lumens	400 lm / 420 lm	
Code	2,700K	4672
	3,000K	4671



3 YEARS WARRANTY | 25,000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 15° | 50/60 Hz | TRIAC DIMM | +40°C / -20°C | 10/50


Tutto MR11

Tutto GU10




Technical Information

Power	4W		4W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	240 lm / 250 lm / 260 lm		285 lm / 300 lm / 315 lm	
Code	2.700K	3447	2.700K	3444
	3.000K	3448	3.000K	3445
	4.000K	3449	4.000K	3446
12V AC/DC		220/240 VAC		



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | PF >0,9 | CRI ≥80 | 60° | 50/60 Hz | +40°C / -20°C | 10/50

Adn G4



Technical Information

Power	2,5W
Color Temperature	3,000K
Lumens	198 lm
Code	130L006



3 YEARS WARRANTY

25.000 HOURS

IP 40

12V AC/DC

PF >0,6

CRI ≥80

360°

50/60 Hz


+40°C
-20°C

10/50

Uniform-line G4



Uniform-line long G4




Technical Information

Power	1,3W	1,6W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	150 lm / 158 lm	203 lm / 223 lm
Code	3.000K 130L006-2	3.000K 130L195-C
	5.000K 130L006-2F	5.000K 130L195-D




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 12V AC/DC | PF >0,5 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C | 

Uniform-line G9



Uniform-line long G9



Technical Information



Power	2,5W	2,8W
Color Temperature	3.000K / 5.000K	3.000K / 5.000K
Lumens	242 lm / 250 lm	308 lm / 314 lm
Code	3.000K 130L184-5	3.000K 130L195-A
	5.000K 130L184-5F	5.000K 130L195-B



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C |  10/50


Shop E14

Prisma E14



Technical Information

Power	2W	4W
Color Temperature	3,000K	3,000K
Lumens	180 lm	340 lm
Code	3450	3474-M




3 YEARS WARRANTY | 25,000 HOURS | IP 44 | 220/240 VAC | PF >0,3 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C -20°C |  10/50

PI T40 E27



Technical Information

Power	10W
Color Temperature	3.000K / 4.000K
Lumens	825 lm / 880 lm
Code	3.000K 582L016T40E-C3
	4.000K 582L016T40E-F



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80

360° 



50/60 Hz

 +40°C
-20°C



Cala 9W G24

Cala 10W G24




Technical Information

Power	9W		10W	
Color Temperature	3.000K / 4.000K		3.000K / 4.000K	
Lumens	880 lm / 935 lm		1.100 lm / 1.155 lm	
Code	3.000K	582L015-C3	3.000K	582L015-C3B
	4.000K	582L015-F4	4.000K	582L015-F4B




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 135° | 50/60 Hz | +40°C / -20°C | 10/50


HQI tubular RX7S



HQI tubular G12




HQI tubular E27




Technical Information

Power	13W	10W	10W
Color Temperature	3.000K / 4.000K	3.000K / 4.000K	3.000K / 4.000K
Lumens	1.320 lm / 1.375 lm	1.000 lm / 1.030 lm	1.000 lm / 1.030 lm
Code	3.000K 592063-TC 4.000K 592063-TF	3.000K 592063-G12/3 4.000K 592063-G12/4	3.000K 3570 4.000K 3571
	6/30	10/50	10/50




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C / -20°C


Lineal tubular 5W R7S



Lineal tubular 9W R7S




Lineal tubular 9W R7S
dimmable




Technical Information

Power	5W		9W		9W	
Color Temperature	3.000K / 4.000K		3.000K / 4.000K		3.000K / 4.000K	
Lumens	561 lm / 574 lm		935 lm / 1.000 lm		935 lm / 1.000 lm	
Code	3.000K	140026-C3T	3.000K	141123-TC3	3.000K	141123-TC3D
	4.000K	140026-F4T	4.000K	141123-TF4	4.000K	141123-TF4D
		3 YEARS WARRANTY			3 YEARS WARRANTY	4 YEARS WARRANTY
						TRIAC DIMM




25.000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360°  50/60 Hz |  +40°C -20°C | 


Lineal tubular 11W R7S
dimmable



Lineal 13W R7S




Lineal 9W R7S





Technical Information

Power	11W	13W	9W
Color Temperature	3.000K / 4.000K	3.000K / 4.000K / 5.000K	3.000K / 4.000K
Lumens	1.210 lm / 1.280 lm	1.700 lm / 1.780 lm / 1.800	858 lm / 880 lm
Code	3.000K 3477 4.000K 3478	3.000K 3904 4.000K 3905 5.000K 3906	3.000K 140L026L 4.000K 140L0261L




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 50/60 Hz | +40°C / -20°C | 6/30

Esférica 5W E14/E27

Esférica 5,5W E14/E27
dimmable

Esférica 7W E14/E27



Technical Information


Power	5W	5,5W	7W
Color Temperature	2.700K/3.000K/4.000K/5.000K	2.700K / 3.000K / 4.000K	2.700K/3.000K/4.000K/5.000K
Lumens	440 lm/462 lm/484 lm/495 lm	396 lm / 418 lm / 440 lm	700 lm/750 lm/800 lm/820 lm

Code	2.700K E14	592563-4C2(N)	2.700K E14	592563R-C2	2.700K E14	4243
	2.700K E27	5925631-4C2(N)	2.700K E27	592563R1-C2	2.700K E27	4244
	3.000K E14	592563(N)-4C(N2)	3.000K E14	592563R-C3	3.000K E14	4245
	3.000K E27	5925631(N)-4C(N2)	3.000K E27	592563R1-C3	3.000K E27	4246
	4.000K E14	592563(N)-4F(N2)	4.000K E14	592563R-F4	4.000K E14	4247
	4.000K E27	5925631(N)-4F(N2)	4.000K E27	592563R1-F4	4.000K E27	4248
	5.000K E14	3538(N)			5.000K E14	4249
	5.000K E27	3537(N)			5.000K E27	4250

5 YEARS WARRANTY | 50.000 HOURS | IP 40


3 YEARS WARRANTY | 25.000 HOURS | IP 40 | TRIAC DIMM

3 YEARS WARRANTY | 25.000 HOURS | IP 20




220/240 VAC | PF >0,9 | CRI ≥80 | 360° | 50/60 Hz | +40°C / -20°C | 10/50

Standard 6W E27




Standard 9W E27




Technical Information

Power	6W		9W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K	
Lumens	534 lm / 550 lm / 660 lm		880 lm/891 lm/935 lm/945 lm	
Code	2.700K	592125S-6(N)	2.700K	592125SC-2(N)
	3.000K	592125S-6C(N)	3.000K	592125SC-3(N)
	4.000K	592125S-6F(N)	4.000K	592125SC-4(N)
			5.000K	3539(N)




3 YEARS WARRANTY | 25,000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C / -20°C | 

Standard 12W E27




Standard 15W E27




Technical Information

Power	12W		15W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	1.100 lm / 1.122 lm / 1.144 lm		1.550 lm / 1.600 lm / 1.650 lm	
Code	2.700K	3479(N)	2.700K	3482(N)
	3.000K	3480(N)	3.000K	3483(N)
	4.000K	3481(N)	4.000K	3484(N)




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C / -20°C | 


Standard 10W E27
dimmable



Standard 12W E27
dimmable




Standard 17W E27
dimmable




Technical Information

Power	10W		12W		17W	
Color Temperature	2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K		2.700K/3.000K/4.000K/5.000K	
Lumens	880 lm / 891 lm / 935 lm		1.100 lm / 1.122 lm / 1.144 lm		1.550 lm / 1.600 lm / 1.650 lm / 1.700 lm	
Code	2.700K	592125R-C	2.700K	592125R2-C	2.700K	3527
	3.000K	592125R-C3	3.000K	592125R2-C3	3.000K	3528
	4.000K	592125R-F	4.000K	592125R2-F	4.000K	3529
					5.000K	3530




3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360°  50/60 Hz |  TRIAC DIMM |  +40°C / -20°C |  10/50


Micro globo 6W E27



Globo 10W E27




Globo 10W E27
dimmable



Technical Information

Power	6W	10W	10W
Color Temperature	2.700K / 3.000K	2.700K / 3.000K / 4.000K	3.000K
Lumens	480 lm / 500 lm	1.100 lm / 1.130 lm / 1.180 lm	800 lm
Code	2.700K 505143E-C	2.700K 3524	3.000K 505119DIM-C
	3.000K 3881	3.000K 3525	
		4.000K 3526	
5 YEARS WARRANTY 50.000 HOURS		3 YEARS WARRANTY 25.000 HOURS	3 YEARS WARRANTY 25.000 HOURS TRIAC DIMM



IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 360° | 50/60 Hz | +40°C / -20°C | 10/40




Globo 15W E27



Globo 16W E27




Globo 22W E27



Technical Information



Power	15W		16W		22W	
Color Temperature	2.700K / 4.000K		2.700K / 3.000K / 4.000K		2.700K / 3.000K / 4.000K	
Lumens	1.400 lm / 1.500 lm		1.600 lm / 1.700 lm / 1.750 lm		2.400 lm / 2.500 lm / 2.600 lm	
Code	2.700K	4677	2.700K	3521	2.700K	3518
	4.000K	4678	3.000K	3522	3.000K	3519
			4.000K	3523	4.000K	3520



3 YEARS WARRANTY | 25.000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥80 | 360°  | 50/60 Hz |  +40°C / -20°C | 


Flama E14/E27

Flama dimmable E14



Technical Information

Power	5,5W			5,5W	
Color Temperature	2.700K / 3.000K / 5.000K			3.000K	
Lumens	450 lm / 500 lm / 550 lm			418 lm	
Code	2.700K	E14	592122-FL2	3.000K	592122R-C3
	2.700K	E27	592122-FL2E		
	3.000K	E14	592122-FL3		
	3.000K	E27	592122-FLE3		
	5.000K	E14	3534		



3 YEARS WARRANTY

25.000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80

360°

50/60 Hz

+40°C
-20°C


10/50

R-63 s-line GU10




Technical Information

Power	8W
Color Temperature	2,700K
Lumens	720 lm
Code	4003




5 YEARS WARRANTY | 50,000 HOURS | IP 20 | 220/240 VAC | PF >0,8 | CRI ≥80 | 60° | 50/60 Hz | +40°C / -20°C | 10/50


R-39 E14



R-50 E14



R-63 E27



Technical Information

Power	3W	5W	8W
Color Temperature	3.000K	3.000K	3.000K
Lumens	308 lm	385 lm	660 lm
Code	592122R39-2	5920731-(N2)	592072-1
	IP 40	IP 40	IP 20



3 YEARS WARRANTY

25,000 HOURS

220/240 VAC

PF >0,8

CRI ≥80


120°

50/60 Hz


+40°C
-20°C

10/50


R-80 E27



R-90 2.200K E27




R-90 3.000K E27




Technical Information

Power	10W	12W	12W
Color Temperature	3,000K	2,200K	3,000K
Lumens	891 lm	850 lm	1,100 lm
Code	592076-C3(N)	4137	592074-C(N)




3 YEARS WARRANTY | 25,000 HOURS | IP 40 | 220/240 VAC | PF >0,8 | CRI ≥80 | 120° | 50/60 Hz | +40°C -20°C | 10/40


Par 30 E27



Par 38 3.000K E27



Par 38 Green E27




Technical Information

Power	10W	15W	15W
Color Temperature	3.000K	3.000K	Green
Lumens	660 lm	1.100 lm	190 lm
Code	171160P30-C	171160P38(N)-C	3579
	45°	30°	30°




3 YEARS WARRANTY | 25.000 HOURS | IP 65 | 220/240 VAC | PF >0,8 | CRI ≥80 | 50/60 Hz | +40°C -20°C | 10/40

Sil E27



Technical Information


Power	20W
Color Temperature	2.700K / 4.000K
Lumens	2,035 lm / 2.550 lm
Code	2.700K 592165SIL-C
	4.000K 592165SIL-F



3 YEARS WARRANTY | 25,000 HOURS | IP 40 | 220/240 VAC | PF >0,9 | CRI ≥85 | 360°  | 50/60 Hz |  +40°C -20°C | 

Aria 30W E27/E40

Aria 50W E27/E40

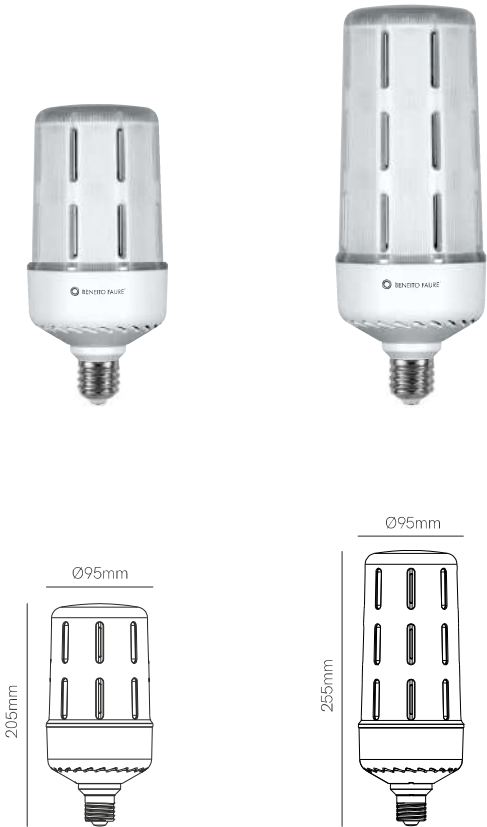

Technical Information

Power	30W	50W
Color Temperature	2.700K / 5.000K	2.700K / 5.000K
Lumens	3.100 lm / 3.550 lm	5.400 lm / 6.200 lm
Code	2.700K E27 3854	2.700K E27 3858
	2.700K E40 3856	2.700K E40 3860
	5.000K E27 3855	5.000K E27 3859
	5.000K E40 3857	5.000K E40 3861



3 YEARS WARRANTY

25.000 HOURS

IP 20

220/240 VAC

PF >0,9

CRI ≥80

360°

50/60 Hz


+40°C
-20°C

> 1KV

ENCLOSED NO


6/24

Cup 45W E27/E40



Technical Information

Power	45W
Color Temperature	3,000K
Lumens	3,960 lm
Code	3,000K E27 592141-C3E2
	3,000K E40 592141-E4C3



3 YEARS WARRANTY

25,000 HOURS

IP 40

220/240 VAC

PF >0,8

CRI ≥80

100°

50/60 Hz



+40°C
-20°C

ENCLOSED NO

6

Obo 19W E27

Obo 27W E27



Technical Information

Power	19W	27W
Color Temperature	2.200K / 5.000K	2.200K / 5.000K
Lumens	1.425 lm / 1.900 lm	2.025 lm / 3.000 lm
Code	2.200K 3909	2.200K 3910
	5.000K 3917	5.000K 3918



5 YEARS WARRANTY

50.000 HOURS

IP 64

100/240 VAC

PF >0,9

CRI ≥70 2.200K

CRI ≥80 5.000K

170°

50/60 Hz

+60°C
-40°C



> 4KV

ENCLOSED OK

16


Obo 36W E27/E40

Obo 45W E27/E40



Technical Information

Power	36W			45W		
Color Temperature	2.200K / 5.000K			2.200K / 5.000K		
Lumens	2.700 lm / 3.900 lm			3.375 lm / 4.500 lm		
Code	2.200K	E27	3911	2.200K	E27	3912
	2.200K	E40	3920	2.200K	E40	3923
	5.000K	E27	3919	5.000K	E27	3922
	5.000K	E40	3921	5.000K	E40	3924



5 YEARS WARRANTY

50.000 HOURS

IP 64

100/240 VAC

PF >0,9

CRI ≥70 2.200K

CRI ≥80 5.000K

170°


50/60 Hz


+60°C
-40°C

> 4KV


ENCLOSED OK

16

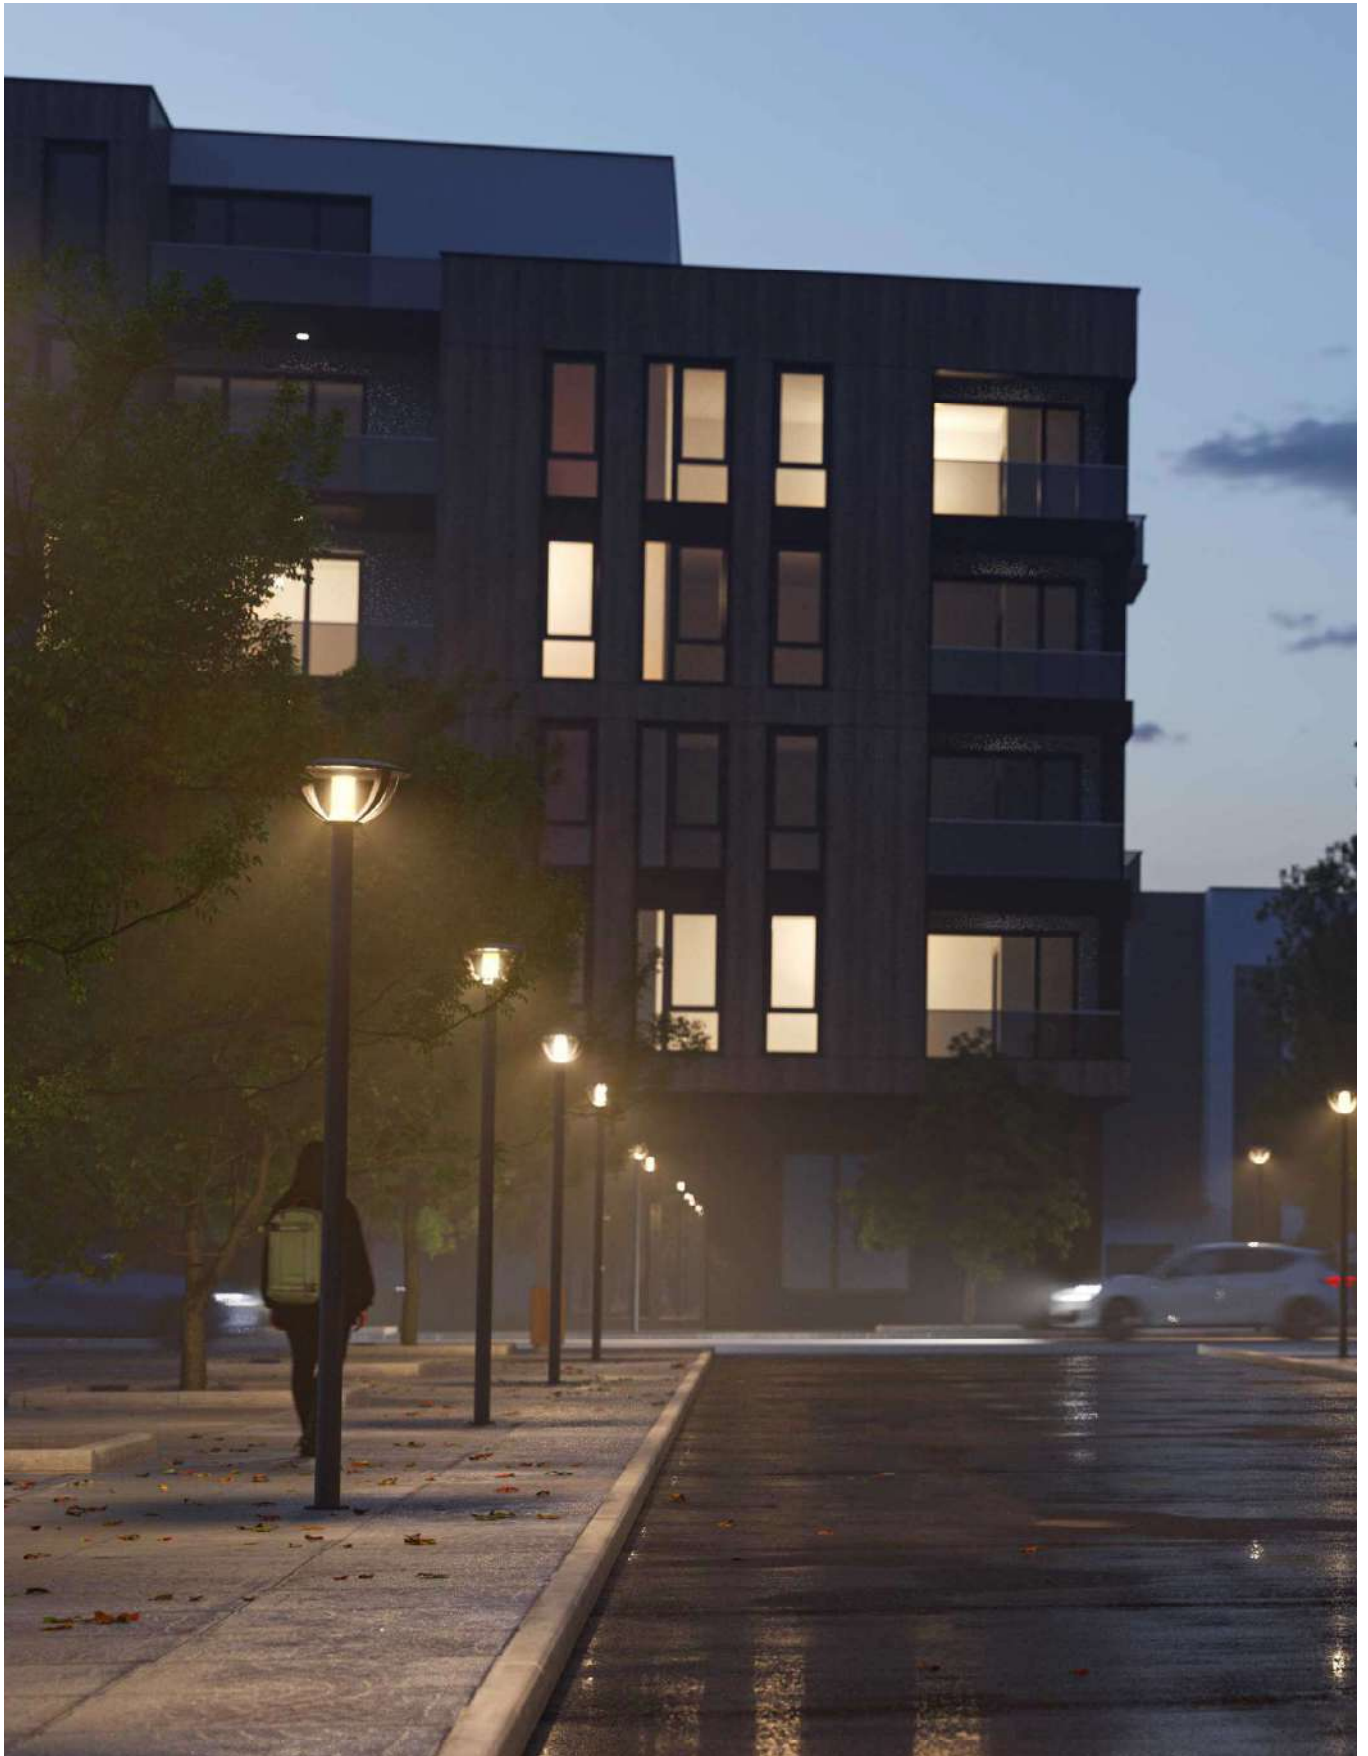


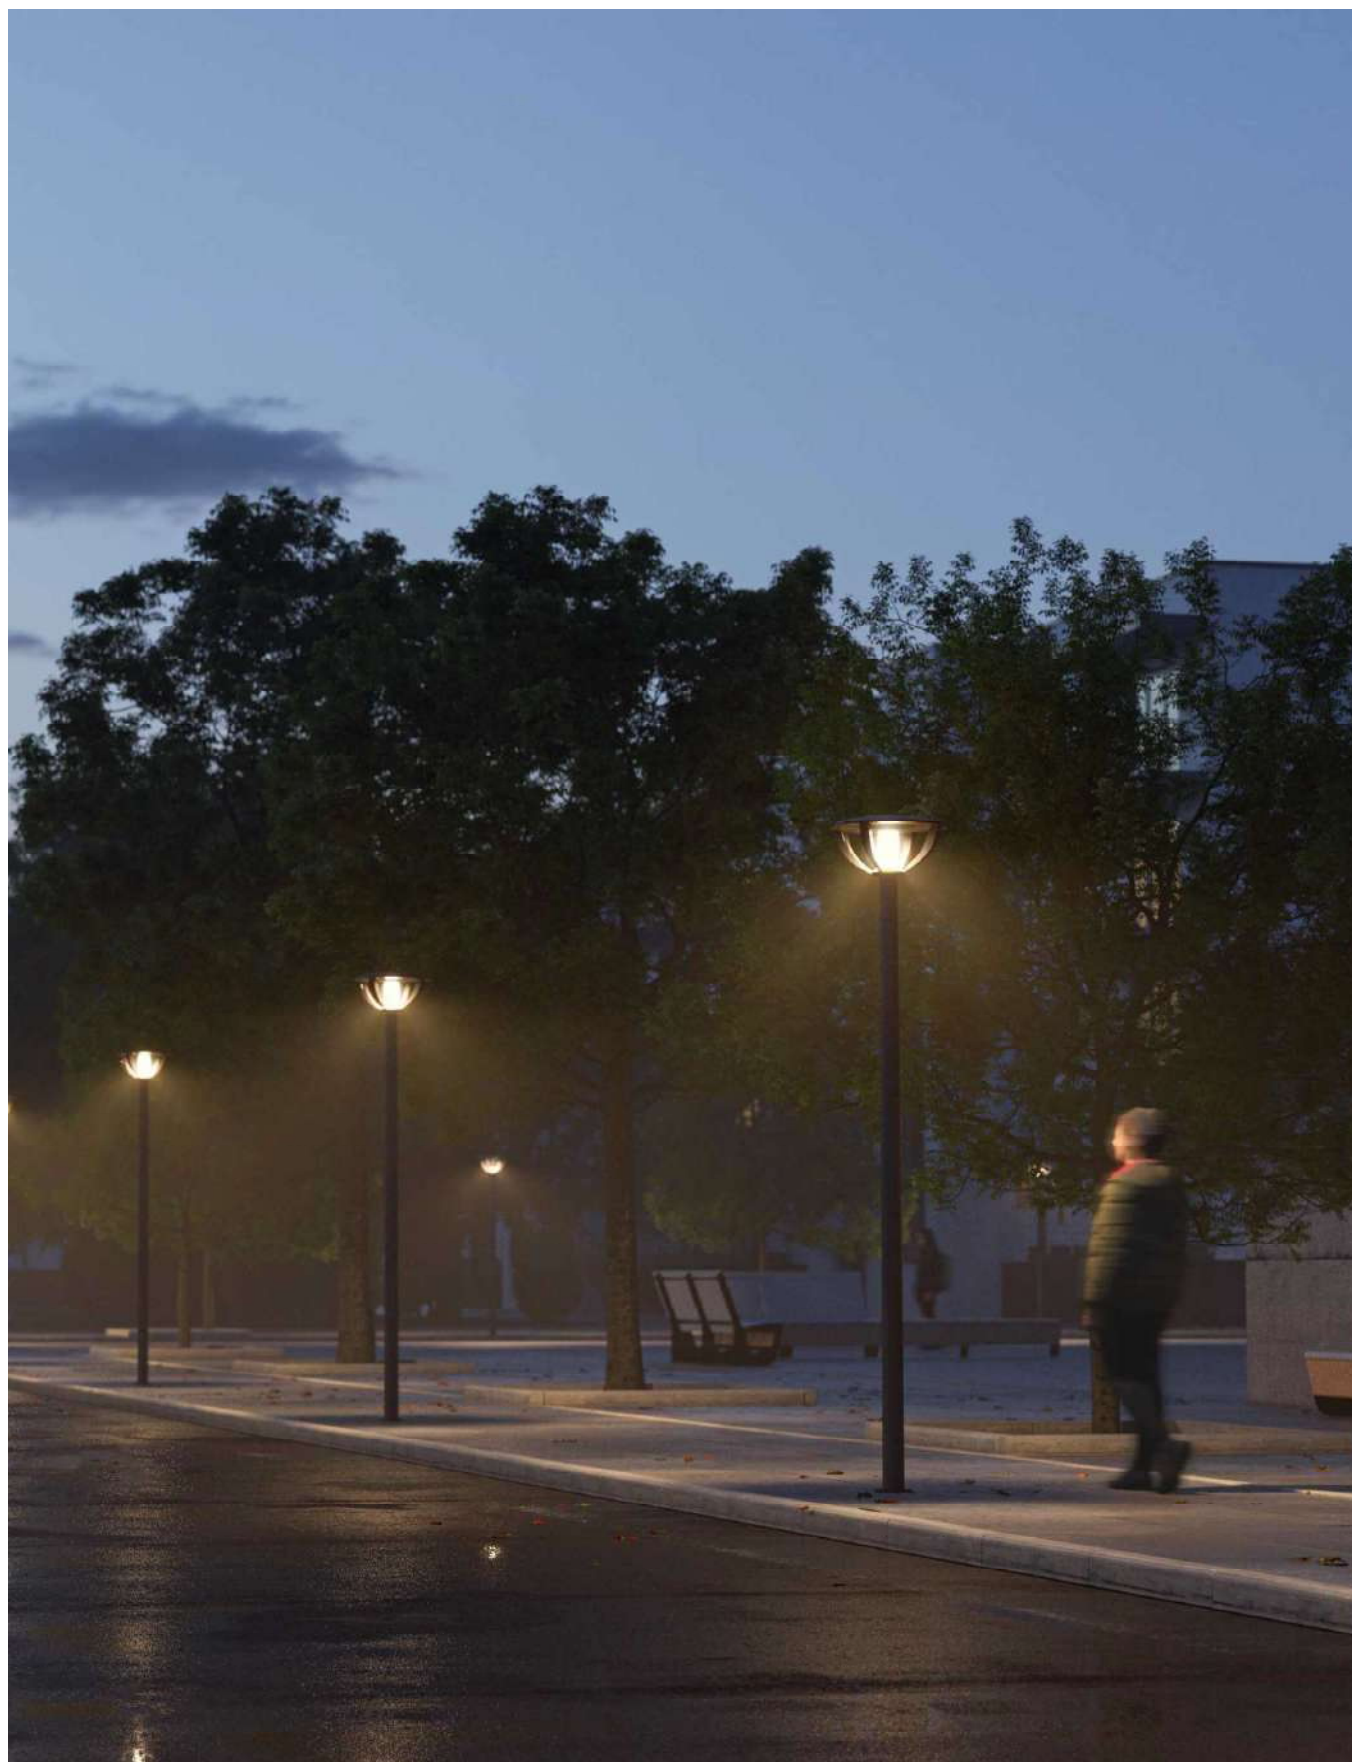


Smile 20W E27



Smile 40W E27



Smile 60W E40



Technical Information



Power	20W	40W	60W
Color Temperature	2,200K / 5,000K	2,200K / 5,000K	2,200K / 5,000K
Lumens	2,000 lm / 3,000 lm	4,000 lm / 6,000 lm	6,000 lm / 9,000 lm
Code	2,200K 3913	2,200K 3914	2,200K 3915
	5,000K 3925	5,000K 3926	5,000K 3927
	24	12	12



5 YEARS WARRANTY | 50,000 HOURS | IP 64 | 100/240 VAC | PF >0,9 | CRI ≥70 2.200K | CRI ≥80 5.000K | 120° | 50/60 Hz | +60°C -40°C | > 4KV | ENCLOSURED OK


Noa 80W E27/E40

Noa 85W E27/E40



Technical Information

Power	80W	85W
Color Temperature	2.200K	2.700K / 5.000K
Lumens	5.900 lm	9.700 lm / 10.200 lm
Code	2.200K E27/ E40 3965	2.700K E27 3902
		2.700K E40 3900
		5.000K E27 3903
		5.000K E40 3901



3 YEARS WARRANTY

25.000 HOURS

IP 65

100/260 VAC

PF >0,9

CRI ≥80

360°

50/60 Hz

+40°C
-20°C

ENCLOSED NO

8

Conditions



PRICES UPDATE - INTERNET UPDATE - PDF

Our interest in new solutions and for the development of lighting technology and lighting industry, we are constantly innovating. This is why BENEITO FAURE offers to its customers a frequently online updated PDF to inform about all our news.

You can find all the information on our website:

www.beneito-faure.com

IMPORTANT:

All information on the website can be cancelled and replaced by another one, and will be the last update the only right one.

For this reason is very important to visit our web.



TARIFA BENEITO FAURE - ACTUALIZACIÓN DIGITAL - PDF

Nuestra implicación desde BENEITO FAURE por una continua elaboración de soluciones avanzadas, junto al progresivo cambio tecnológico de la industria de la iluminación en los últimos años, nos hace estar en constante innovación.

Por ello, ponemos al servicio de todos nuestros clientes una actualización frecuente on-line (formato PDF) con la intención de tenerlos informados en todo momento de las últimas novedades de BENEITO FAURE.

La mencionada actualización se encuentra disponible en nuestra página WEB:

www.beneito-faure.com

IMPORTANTE:

Cualquier información publicada quedará anulada y sustituida por la que aparece en cada momento en nuestra WEB, siendo esta la única con validez y vigencia de gama y precios de venta recomendados.

Por ello, desde Beneito Faure recomendamos a todos nuestros clientes visiten nuestra página web.



GENERAL CONDITIONS OF SALE

BENEITO FAURE S.L reserves the right to make the variations it deems appropriate to its products, not being responsible for the possible erroneous information that appears in the catalog.

RATE

For any type of order the rate and conditions in force at the time of receipt of the order will apply. The rate will be sent via email to all customers in the BENEITO FAURE database and will be updated whenever necessary. Prices do not include VAT if recycling rate.

ORDERS

Orders must be sent via email. No order will be placed by phone or any other means. The quote of the material to be made to measure will be sent to the customer for acceptance and will not be processed prior receiving the copy signed for acceptance.

RETURNS

To make any return, the authorization must be requested from BENEITO FAURE. The return of the material must be communicated by e-mail indicating the customer's name, the reason of the return, the date of purchase, the number of units and the reference of the product to be returned. It is mandatory to attach a copy of the purchase invoice. The acceptance of the return does not imply the definitive acceptance of it. The return will be definitive only after the subsequent verification and analysis of the product by our technical department. Returns of merchandise will only be accepted if in perfect condition for sale and in the original packaging in good condition. The packaging label must also be intact. Returns will not be compensated by an economic amount and must be sent by means of the client's transport. The return of material may be compensated by prior order and with the authorization of BENEITO FAURE. The return of the products made to measure or previously processed by the technical department due to the customer's request, will not be accepted.

TRANSPORT

Unless other transport terms are agreed, the merchandise will travel on behalf of those purchased with the EXWORKS conditions. Likewise, BENEITO FAURE will offer a delivery time for each territory, this being always approximate. The company will not be responsible for possible alterations or delays on this time caused by causes outside the company.

PROPERTY RESERVATION

BENEITO FAURE reserves the right to own all the materials that it supplies until the buyer has paid the total amount thereof.

The requested goods are supplied under reservation of ownership in favor of BENEITO FAURE

The client is obliged to cooperate and take all steps necessary or desirable, and to propose or need to BENEITO safeguard their ownership of the goods. The serve of domain remains even in the event that the client had accepted and recognized credits against BENEITO or had established a system of accounts between them. The transformation or improvement of goods on which BENEITO has reserve domain, does not give property to client or manipulative. In case of union, transformation and/or accession of goods under domain's reserve to thirds, subsist the domain's reserve in proportion to the value that the goods subject had to domain's reserve before to accession. The client may sell the goods subject to domain's reserve in the ordinary course of business, provided those no breach his payment obligations to BENEITO. Upon a resale of goods subject to domain's reserve, occurs automatically the transfer to BENEITO of credits arising of that sale to the seller, and any other credit arising in the case of compensation for loss of thing, tort-contract, etc. in such cases, the client is obliged to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to BENEITO to provide all information and documentation necessary for the claim of the subrogated credits. In case of default by the client, in particular, in the case of late payment, or if a declaration of bankruptcy of the client, BENEITO claim by notifying the client, in possession of the goods, being obligated to give them. If before performed the pay of total price, the goods sold were affected by some lien or lock, the client shall be obliged to safe explicitly in the diligence of the embargo, that the goods are owned by BENEITO and if, despite this, were seized, must facilitate to BENEITO the exercise by the relevant third domain action, whose expenses will be paid by the client.

DELIVERY TERM

The availability terms offered by BENEITO FAURE are always approximate and may be subject to variations. These possible variations in the terms will not imply the acceptance of the responsibility or penalties for the delay by BENEITO FAURE.

CLAIMS

On the delivery note of the carrier, any visible anomaly must be recorded and, after having reviewed the material, communicate in writing to our offices the incident within 24 hours of receiving the merchandise. Once this time has elapsed, the company will not be able to take charge of the claim because it is not in time for the transport agency. For other types of claims, you must contact our offices by written email. The product that does not work correctly will be replaced by the same article or another with the same characteristics. In no case will we be responsible for the costs of labor that may be caused by the malfunction of a product in our catalog.

WARRANTY

BENEITO FAURE guarantees that the products sold are in perfect condition. The warranty will cover the repair or replacement of the product (under the decision of BENEITO FAURE) and it will be necessary to send the incident by email. The product warranty is in its packaging. The technical department of BENEITO FAURE will be the only one authorized to determine if it is a manufacturing defect, after receiving the incident and the sales invoice in writing for prior verification. BENEITO FAURE quantifies the warranty time considering the date of the customer's purchase invoice and not on the hours of operation of the product.

The WARRANTY will not be covered:

1. If the product has been previously handled.
2. It is not installed according to the instructions.
3. If the ventilation of which is not adequate.
4. Problems with partial or total payment by the client.

JURISDICTION

In any discrepancy or dispute, both parties will submit to the jurisdiction of the Judges and courts of Barcelona.



ALLGEMEINE GESCHÄFTSBEDINGUNGEN

BENEITO FAURE S.L behält sich das Recht, etwaige, für erforderlich gehaltene Änderungen an den Produkten vorzunehmen, und ist nicht für mögliche Fehlinformationen im entsprechenden Katalog haftbar.

PREISLISTE

Alle Bestellungen unterliegen der zum Zeitpunkt der Bestellung geltenden Preisliste und den entsprechenden Geschäftsbedingungen. Die Preisliste wird per E-Mail an alle Kunden, die sich in der Datenbank von BENEITO FAURE befinden, geschickt und wird, wenn erforderlich, entsprechend aktualisiert werden. Die Preise enthalten weder die Mehrwertsteuer noch die Recyclinggebühr.

BESTELLUNGEN

Bestellungen müssen per E-Mail geschickt werden. Es werden keine Bestellungen telefonisch oder auf sonstigem Wege entgegengenommen. Der Kostenvoranschlag bzw. das Angebot für das nach Kundenvorgaben anzufertigende Produkt, wird dem Kunden zur Prüfung und zur Freigabe zugesandt und wird erst nach Erhalt der geprüften Auftragsfreigabe bearbeitet.

RÜCKGABEN

Alle Rückgaben müssen vorab bei BENEITO FAURE beantragt und von der Firma genehmigt werden. Die Rücksendung-Anfrage des Materials muss per E-Mail unter Angabe des Kundennamens, des Grundes der Rücksendung, des Kaufdatums, der Anzahl der Einheiten und der Referenz des zurückzusendenden Produkts erfolgen. Es ist zwingend erforderlich, eine Kopie der Kaufrechnung beizufügen. Die Annahme der Rücksendung bedeutet nicht die endgültige Annahme. Die Rücksendung ist erst nach der anschließenden Überprüfung und Analyse des Produkts durch unsere technische Abteilung endgültig. Warenrücksendungen werden nur akzeptiert, wenn sie sich in einwandfreiem Zustand zum Verkauf und in der Originalverpackung in gutem Zustand befinden. Das Verpackungsetikett muss ebenfalls intakt sein. Rückgaben werden nicht durch einen Geldbetrag ausgeglichen und müssen vom Kunden mit eigenen Transportmitteln geschickt werden. Die Materialrückgabe kann, nach Genehmigung von BENEITO FAURE, durch eine Vorbestellung ausgeglichen werden. Die Rücksendung der nach Maß gefertigten oder zuvor von der technischen Abteilung auf Kundenwunsch gefertigten Produkte wird nicht akzeptiert.

TRANSPORT

Außer im Falle von gesondert vereinbarten Transportbedingungen, wird die Ware unter ex-works Bedingungen zu Lasten des Käufers versendet werden. BENEITO FAURE wird die Lieferzeiten stets dem Empfangsort entsprechend angeben, wobei es sich immer um annähernde Zeiten handeln wird. Das Unternehmen ist nicht für etwaige Änderungen oder Verspätungen haftbar, die sich aus Gründen, die nicht vom Unternehmen zu verantworten sind, ergeben.

EIGENTUMSVORBEHALT

BENEITO FAURE behält sich das Eigentumsrecht auf alle gelieferten Materialien, bis der Käufer den gesamten Kaufbetrag beglichen hat.

Die bestellten Waren werden unter Eigentumsvorbehalt zu Gunsten von BENEITO geliefert, bis der Kunde allen Zahlungsverpflichtungen nachgekommen ist. Der Kunde verpflichtet sich, zu kooperieren und alle notwendigen oder angemessenen Maßnahmen und solche Maßnahmen, die BENEITO vorschlägt oder benötigt, zu ergreifen, um sein Eigentum über die Ware zu schützen. Der Eigentumsvorbehalt besteht selbst dann weiter, wenn der Kunde akzeptierte und anerkannte Forderungen gegenüber BENEITO hätte, oder wenn ein System laufender Konten zwischen beiden Parteien bestünde. Die Transformation oder Verbesserung der Ware für die BENEITO einen Eigentumsvorbehalt hat, überträgt sein Eigentum nicht an den Kunden oder den Anwender. Im Falle von Zusammenführung, Transformation und/oder Beistellung von Produkten unter Eigentumsvorbehalt mit Produkten von Dritten besteht der Eigentumsvorbehalt in Proportion entsprechend dem Wert, den die Produkte mit Eigentumsvorbehalt vor der Beistellung hatten, fort. Der Kunde kann die Waren unter Eigentumsvorbehalt im Rahmen seiner gewöhnlichen Geschäfte verkaufen, solange er seinen Zahlungsverpflichtungen gegenüber BENEITO nachkommt. In jedem Fall erfolgt bei einem Wiederverkauf der Waren unter Eigentumsvorbehalt automatisch eine Abtretung der aus diesem Wiederverkauf entstehenden Forderungen zugunsten des Verkäufers an BENEITO, sowie eine Abtretung aller anderen Forderungen, die ggf. als Entschädigungen durch Warenverlust, außervertragliche Haftung usw. entstehen. Der Kunde ist in diesen Fällen dazu verpflichtet, BENEITO alle für die Reklamation der übertragenen Forderungen notwendigen Informationen und Unterlagen zur Verfügung zu stellen. Im Falle einer Nichteinhaltung seitens des Kunden, und insbesondere im Fall von verspäteten Zahlungen oder Konkurserklärung seitens des Kunden, reklamiert BENEITO als Eigentümer der Ware, nach vorheriger Mitteilung an den Kunden, die Zurückgabe der Ware seitens des Kunden. Sollte die verkaufte Ware vor der vollständigen Bezahlung des Preises Gegenstand von Pfändung oder Handelshemmnis werden, ist der Kunde verpflichtet, bei der Pfändungsmaßnahme ausdrücklich darauf hinzuweisen, dass die Waren Eigentum von BENEITO sind und, sollten sie trotz dieser Erklärung gepfändet werden, die Durchführung des entsprechenden Drittwiderspruchs, dessen Kosten zu Lasten des Kunden gehen, seitens BENEITO zu ermöglichen.

DLIEFERZEIT

Die von BENEITO FAURE genannten Lieferzeiten und Verfügbarkeiten verstehen sich immer als ca. Angaben und können Änderungen unterliegen. Diese möglichen Änderungen der Lieferzeiten bedeuten nicht die Anerkennung der Verantwortung oder die Auferlegung einer Strafe als Folge des Verzugs durch BENEITO FAURE.

REKLAMATIONEN

Jegliche sichtbaren Mängel müssen auf dem Lieferschein des Transportunternehmens eingetragen werden. Nach Prüfung der Ware, müssen etwaige Vorfälle unserer Firma innerhalb der nächsten 24 Stunden schriftlich mitgeteilt werden. Nach dieser Frist übernimmt die Firma keine Haftung für Reklamationen, da die vom Transportunternehmen vorgeschriebene Frist abgelaufen ist. Im Falle sonstiger Reklamationen müssen diese unserer Verwaltung schriftlich mitgeteilt werden. Produkte, die nicht korrekt funktionieren, werden durch gleiche Produkte, oder Produkte mit den gleichen Eigenschaften, ersetzt. In keinem Fall werden wir die Arbeitskosten übernehmen, die sich aus der Fehlfunktion eines Produkts aus unserem Katalog ergeben könnten.

GARANTIE

BENEITO FAURE garantiert, dass die verkauften Produkte sich in perfektem Zustand befinden. Die Garantie deckt die Reparatur oder den Ersatz des Produkts (nach Entscheidung von BENEITO FAURE). Der Fall muss jedoch vorab per E-Mail angezeigt werden. Die Produktgarantie befindet sich in der Produktverpackung. Die technische Abteilung von BENEITO FAURE ist die einzige autorisierte Stelle, um die Entscheidung zu treffen, ob es sich um einen Herstellungsfehler handelt, nachdem der Fall schriftlich gemeldet wurde, samt Rechnung, zur entsprechenden Prüfung.

BENEITO FAURE bewertet die Garantiezeit unter Berücksichtigung des Datums der Kaufrechnung des Kunden und nicht anhand der Betriebsstunden des Produktes.

Die GARANTIE gilt nicht:

1. Wenn das Produkt manipuliert wurde.
2. Wenn das Produkt nicht gemäß Anleitungen installiert wurde.
3. Wenn die Produktbelüftung nicht geeignet ist.
4. Wenn Probleme für die teilweise oder vollständige Zahlung durch den Kunden vorliegen.

GERICHTSBARKEIT

Im Falle etwaiger Uneinigkeiten oder Streitfälle, werden sich beide Parteien der Gerichtsbarkeit der Richter und Gerichte von Barcelona unterwerfen.



CONDITIONS GÉNÉRALES DE VENTE

BENEITO FAURE S.L. se réserve le droit de faire les variations qu'elle juge appropriées à ses produits n'étant pas responsable de toute information erronée qui apparaît dans le catalogue.

TARIF

Pour tout type de commande, nous appliquerons les tarifs et conditions en vigueur au moment de la réception de la commande. Le tarif sera envoyé par e-mail à tous les clients qui sont dans la base de données de BENEITO FAURE et sera mis à jour si nécessaire. Les prix n'incluent pas la TVA.

COMMANDES

Les commandes doivent être envoyées par EMAIL. Aucune commande ne sera passée par téléphone ou par tout autre moyen. Les devis de matériel qui doit être manipulé sur mesure seront soumis au client pour validation et ne seront pas traités avant de recevoir la copie signée du bon pour accord.

RETOURS

Pour tout retour, une autorisation préalable doit être demandée à BENEITO FAURE. Il faudra communiquer le motif du retour par courrier électronique en indiquant le nom du client, la date d'achat, les unités et la référence du produit retourné, le motif du retour et le bon de livraison concerné. L'acceptation du retour n'implique pas l'acceptation définitive de celui-ci. Le retour ne sera définitif qu'après vérification et analyse du produit par notre service technique. Les retours de marchandises ne seront acceptés que si le matériel est en parfait état pour la vente et dans son emballage d'origine en bon état, ainsi que l'étiquette de l'emballage. Les retours ne seront pas compensés par un montant économique et ils devront être envoyés par le biais du transport du client. Le retour du matériel peut être compensé au moyen d'une commande préalable et avec l'autorisation de BENEITO FAURE. Nous n'accepterons pas les retours de produits de fabrication spéciale ou préalablement manipulés par le service technique à la demande du client.

TRANSPORT

Sauf convention contraire, les marchandises voyagent pour le compte de ceux qui achètent aux conditions EXWORKS. De même, BENEITO FAURE proposera un délai de livraison pour chaque territoire, toujours approximatif. La société ne sera pas responsable d'éventuelles modifications ou retards sur ce délai produits par des causes externes à la société.

RÉSERVE DE PROPRIÉTÉ

BENEITO FAURE se réserve la propriété de tous les matériaux qu'elle fournit jusqu'au paiement intégral par l'acheteur.

La marchandise commandée est livrée sous réserve de propriété en faveur de BENEITO FAURE jusqu'à l'exécution complète des obligations de paiement du client.

Le client est tenu de coopérer et de prendre les mesures nécessaires et celles que BENEITO FAURE propose pour préserver sa propriété des marchandises. La réservation du domaine persiste même si le client a accepté et reconnu des crédits sur BENEITO FAURE ou si un système de comptes courants a été établi entre eux. La transformation ou l'amélioration de la marchandise sur laquelle BENEITO FAURE a une réserve de propriété ne confère pas sa propriété au client ou au manipulateur. Toute supposition d'union, de transformation et/ou d'adhésion des produits sous la réserve de dominion aux produits de tiers subsistera la réserve de dominion dans la proportion correspondant à la valeur qui avait les produits objet de la réserve de dominion avant l'adhésion. Le client peut vendre la marchandise sous réserve de propriété dans le cours normal de ses affaires, à condition qu'il n'ait pas manqué à ses obligations de paiement envers BENEITO FAURE. En tout état de cause, en cas de revente de marchandises sous réserve de propriété, il y a cession de plein droit à BENEITO FAURE des crédits nés de cette revente en faveur du vendeur, ainsi que de tous autres crédits antérieurs, en cas d'indemnisation pour perte de la chose, responsabilité civile, etc. Dans ces cas, le client sera tenu de fournir à BENEITO FAURE toutes les informations et documents nécessaires à la réclamation des crédits subrogés. En cas de non-respect de la part du client, et notamment en cas de retard de paiement ou de déclaration de faillite du client, BENEITO FAURE se réserve le droit de réclamer, moyennant notification préalable au client, la possession des marchandises, le client étant tenu de les lui livrer. Si, avant le paiement intégral du prix, les marchandises vendues font l'objet d'une saisie ou d'un empêchement, le client est tenu de déclarer expressément, dans le cadre de la saisie, que les marchandises sont prioritaires pour BENEITO FAURE et si, malgré cette déclaration, elles sont saisies, BENEITO FAURE pourra exercer l'action correspondante du tiers, dont les frais seront à charge du client.

TEMPS DE LIVRAISON

Les périodes de disponibilité offertes par BENEITO FAURE sont toujours approximatives et peuvent faire l'objet de variations. Ces éventuelles variations de conditions n'impliquent pas l'acceptation de responsabilité ou de pénalités de retard de la part de BENEITO FAURE.

RÉCLAMATIONS

Le bon de livraison du transporteur doit mentionner toute anomalie visible et, après examen du matériel, communiquer par écrit à nos bureaux l'incident dans les 24 heures suivant la réception des marchandises. Passé ce délai, l'entreprise ne pourra pas prendre en charge la réclamation pour ne pas être dans le délai par l'agence de transport. Pour les autres types de réclamations, vous devez communiquer par écrit à nos bureaux. Le produit qui ne fonctionne pas correctement sera remplacé par un autre égal ou qui remplit les mêmes caractéristiques. En aucun cas nous ne prendrons en charge les coûts de main d'œuvre qui peuvent être occasionnés par le dysfonctionnement d'un produit de notre catalogue.

GARANTIE

BENEITO FAURE garantit que les produits vendus sont en parfait état. La garantie couvrira la réparation ou le remplacement du produit (à la discrétion de BENEITO FAURE) et il sera nécessaire d'envoyer l'incident par email. La garantie du produit se trouve sur l'emballage du produit. Le service technique de BENEITO FAURE sera le seul autorisé à déterminer s'il s'agit d'un défaut de fabrication, après avoir reçu par écrit l'incidence et la facture de vente pour vérification préalable. BENEITO FAURE base la période de garantie sur les années écoulées depuis l'achat du produit par le client, et non sur les heures d'utilisation du produit.

La GARANTIE ne sera pas couverte :

1. Si le produit a déjà été manipulé.
2. N'a pas été installé conformément aux instructions.
3. Si la ventilation n'est pas suffisante.
4. Problèmes de paiement partiel ou total par le client.

JURIDICTION

En cas de désaccord ou de litige, les deux parties se soumettront à la juridiction des juges et tribunaux de Barcelone.



CONDIZIONI GENERALI DI VENDITA

BENEITO FAURE S.L. si riserva il diritto di realizzare le variazioni che considera opportune sui propri prodotti non essendo responsabile di possibili informazioni errate che possono apparire nel catalogo.

LISTINO PREZZI

Per qualsiasi ordine si applicano le condizioni di vendita in vigore al momento della ricezione dello stesso. Il listino prezzi è inviato tramite mail a tutti i clienti inseriti nel data base di BENEITO FAURE e può essere aggiornato in qualsiasi momento se necessario. I prezzi sono da intendersi IVA esclusa. Tassa di riciclaggio inclusa.

ORDINI

Gli ordini devono essere inviati esclusivamente tramite mail. Non sarà processato nessun ordine via telefono o tramite altri mezzi. I preventivi del materiale che deve essere fatto su misura saranno inviati al cliente per accettazione e non saranno elaborati fino al ricevimento della copia firmata per accettazione.

RESI

Per procedere con qualsiasi reso è necessario ricevere l'autorizzazione di BENEITO FAURE. Il motivo del reso deve essere comunicato tramite e-mail indicando il nome del cliente, la data di acquisto, le unità ed il riferimento del prodotto da rendere. È obbligatorio allegare sempre la copia della fattura d'acquisto. L'accettazione del reso non implica l'accettazione definitiva dello stesso. Il reso sarà definitivo solo dopo la successiva verifica ed analisi del prodotto da parte del nostro ufficio tecnico. I resi di merce saranno accettati solo se in perfette condizioni per la vendita e nella confezione originale in buone condizioni. Anche l'etichetta dell'imballo deve essere integra. I resi non vengo rimborsati e devo essere spediti unicamente dal cliente all'azienda. I resi vengono compensati con articoli sostitutivi tramite autorizzazione di BENEITO FAURE. Non saranno accettati resi di prodotti fatti su misura o precedentemente trattati dall'ufficio tecnico su richiesta del cliente.

CONSEGNA

A meno che non si accordino speciali condizioni e termini, il trasporto è a carico del destinatario: EX-WORKS. Alternativamente BENEITO FAURE dispone di un servizio di consegna per ogni territorio e la resa ed il prezzo variano a seconda della destinazione. L'azienda non si fa carico di eventuali danni o alterazioni subiti dalla merce durante il trasporto non imputabili dall'azienda stessa.

DIRITTO DI PROPRIETÀ

BENEITO FAURE si riserva il diritto e la proprietà di tutto il materiale che somministra fino al momento in cui il cliente finale abbia totalmente pagato il materiale stesso.

La merce si somministra sotto la riserva di proprietà di BENEITO FAURE fino al totale adempimento delle obbligazioni da parte del cliente.

Il cliente è obbligato a cooperare e adottare tutte le misure necessarie o convenienti e quelle proposte da BENEITO FAURE per salvaguardare la sua proprietà del prodotto. La riserva di proprietà persiste anche quando viene accettato e riconosciuto il credito del cliente da BENEITO FAURE o se si fosse stabilito un sistema di pagamento tra le parti. Le trasformazioni o i miglioramenti della merce sulla quale BENEITO FAURE ha la riserva di proprietà, non assegnano la proprietà al cliente o al manipolatore. In caso di unione, trasformazione e/o adesione dei prodotti sotto la di proprietà di terzi sussisterà la riserva di proprietà in proporzione al valore che avevano i prodotti oggetto di riserva di proprietà prima dell'adesione. Il cliente potrà vendere i beni soggetti a riserva di proprietà nell'ambito dei suoi affari, sempre e quando non ci siano violazioni delle obbligazioni nei confronti di BENEITO FAURE. In tutti i casi quando si genera una rivendita di merce soggetta a diritto di proprietà, si genera automaticamente la cessazione a BENEITO FAURE dei crediti conseguenti alla rivendita in favore del venditore, così come si qualsiasi altro credito precedente, nel suo caso di indennizzo per perdita della cosa, responsabilità extracontrattuale, ecc. Il cliente sarà obbligato in questo caso a fornire a BENEITO FAURE tutte le informazioni e i documenti necessari per i reclami. BENEITO FAURE reclamerà, previa notifica del cliente in possesso della merce, essendo quest'ultimo obbligato a fornirla. Se prima di effettuare il pagamento totale, la merce venduta fosse soggetta a qualsiasi tipo di sequestro o blocco, il cliente sarà obbligato a dichiarare nel documento di sequestro che la merce è proprietà di BENEITO FAURE e se, indipendentemente da questo la merce fosse sequestrata, il cliente deve supportare BENEITO FAURE alla rivalsa del diritto di proprietà le cui spese saranno a carico del cliente.

TEMPI DI CONSEGNA

I tempi di consegna offerti da BENEITO FAURE sono sempre approssimati e possono essere soggetti a variazioni. Queste possibili variazioni non implicano l'accettazione di eventuali responsabilità o penalizzazioni subite a cause del ritardo di BENEITO FAURE.

RECLAMI

Nel documento di trasporto dell'autista deve essere segnalata qualsiasi visibile anomalia. Deve essere effettuato il controllo della merce e segnalato all'azienda entro e non oltre le 24 ore dalla ricezione. Superato questo tempo, l'azienda non si farà carico del reclamo per il ritardo dovuto all'agenzia di trasporto. Qualsiasi altro reclamo dovrà essere trasmesso in forma scritta all'azienda. Il prodotto non funzionante sarà sostituito con il corrispettivo uguale o che presenti le medesime caratteristiche. In nessun caso l'impresa si farà carico dei costi sostenuti per il mal funzionamento di un prodotto del nostro catalogo.

GARANZIA

Beneito Faure garantisce che i prodotti vengono venduti in perfetto stato. La garanzia copre la riparazione o la sostituzione del prodotto (sotto conferma di BENEITO FAURE) ed è necessario l'invio della contestazione via mail. La garanzia del prodotto si trova all'interno dell'imballo. Il dipartimento tecnico di BENEITO FAURE sarà l'unico autorizzato a determinare se si tratta di un difetto di fabbricazione, dopo aver ricevuto in forma scritta la contestazione e la fattura di vendita per poter verificare l'effettivo periodo di garanzia. BENEITO FAURE quantifica il tempo di garanzia considerando la data della fattura di acquisto del cliente e non sulle ore di funzionamento del prodotto.

La GARANZIA non sarà valida se:

1. Il prodotto viene manomesso o manipolato
2. Il prodotto non è installato come da istruzioni
3. La ventilazione del prodotto non è adeguata
4. Il cliente ha problemi con i pagamenti, sia in forma parziale che totale.

FORO DI COMPETENZA

In qualunque caso di discrepanza o controversia, ambe le parti si dovranno riferire al foro di competenza dei Giudici e del Tribunale di Barcellona.



CONDICIONES GENERALES DE VENTA

BENEITO FAURE S.L se reserva el derecho a realizar las variaciones que considere oportunas a sus productos no siendo responsables de la posible información errada que aparezca en dicho catálogo.

TARIFA

Para cualquier tipo de pedido se aplicará la tarifa y condiciones vigentes en el momento de la recepción del pedido. La tarifa se enviará vía email a todos los clientes que se encuentren en la base de datos de BENEITO FAURE y será actualizada siempre que sea necesario. Los precios no incluyen IVA ni tasa de reciclaje.

PEDIDOS

Los pedidos deberán ser enviados vía email. No se cursará ningún pedido por teléfono o cualquier otra vía. Los presupuestos de material que se deba manipular a medida se enviarán al cliente para su aceptación y no se cursarán hasta recibir la copia firmada de la aceptación.

DEVOLUCIONES

Para realizar cualquier devolución se deberá solicitar la autorización previa a BENEITO FAURE. Deberá comunicarse el motivo de la devolución vía email indicando el nombre del cliente, fecha de compra, unidades y referencia del producto devuelto, motivo de la devolución y albarán de compra. La aceptación de la devolución no implica la aceptación definitiva de ésta. Dicha devolución solo será definitiva tras la consiguiente verificación y análisis del producto por parte de nuestro departamento técnico. Solo serán aceptadas las devoluciones de mercancía si ésta se encuentra en perfecto estado para su venta y en su embalaje original en buen estado, así como la etiqueta de embalaje. Las devoluciones no serán compensadas mediante un importe económico. La devolución de material podrá ser compensada mediante un pedido previo y con la autorización de BENEITO FAURE. No se aceptarán devoluciones de productos de fabricación especial o previamente manipulados por parte del departamento técnico bajo petición del cliente.

TRANSPORTE

Salvo que se acuerden otros términos de transporte, la mercancía viajará por cuenta de los comprados con las condiciones EXWORKS. Así mismo, BENEITO FAURE ofrecerá un tiempo de entrega por cada territorio, siendo éste siempre aproximado. La empresa no se hará cargo de posibles alteraciones o demoras sobre éste tiempo producidas por causas externas a la empresa.

RESERVA DE LA PROPIEDAD

BENEITO FAURE se reserva el derecho a la propiedad de todos los materiales que suministre hasta que el comprador haya hecho efectivo el pago del total de los mismos.

Las mercancías pedidas se suministran bajo reserva de dominio en favor de BENEITO FAURE hasta el total cumplimiento de las obligaciones de pago del cliente.

El cliente queda obligado a cooperar y adoptar las medidas que sean necesarias y las que BENEITO FAURE le proponga para salvaguardar su propiedad sobre la mercancía. La reserva del dominio persiste incluso en el supuesto de que el cliente tuviera créditos aceptados y reconocidos contra BENEITO FAURE o se hubiera establecido un sistema de cuentas corrientes entre ambos. La transformación o mejora de la mercancía sobre la que BENEITO FAURE tiene reserva de dominio no otorga su propiedad al cliente o manipulador. En el supuesto de unión, transformación y/o cesión de los productos bajo la reserva de dominio a productos de terceros subsistirá la reserva de dominio en la proporción correspondiente al valor que tuvieran los productos objeto de reserva de dominio con anterioridad a la cesión. El cliente podrá vender los bienes sujetos a la reserva de dominio en el curso ordinario de sus negocios, siempre y cuando no haya incumplido sus obligaciones de pago frente a BENEITO FAURE. En todo caso al producirse una reventa de mercancías sujetas a reserva de dominio, se produce automáticamente la cesión a BENEITO FAURE de los créditos nacidos en consecuencia de dicha reventa en favor del vendedor, así como de cualesquiera otros créditos precedentes, en su caso de indemnizaciones por pérdida de la cosa, responsabilidad extracontractual, etc. El cliente estará obligado en estos supuestos a facilitar a BENEITO FAURE toda la información y documentación necesaria para la reclamación de los créditos subrogados. En caso de incumplimiento por parte del cliente, y en particular, en el supuesto de retraso en los pagos o en caso de declaración de concurso del cliente, BENEITO FAURE reclamará, previa notificación al cliente, en posesión de las mercancías, estando obligado éste a entregárselas. Si antes de efectuado el total pago del precio, las mercancías vendidas fuesen objeto de cualquier embargo o trabas, el cliente vendrá obligado a hacer constar expresamente en la diligencia del embargo, que las mercancías son prioridad de BENEITO FAURE y si, a pesar de esta manifestación, fuesen embargados, facilitará el ejercicio por parte de la BENEITO FAURE de la correspondiente acción de tercería de dominio, cuyos gastos correrán por parte del cliente.

PLAZO DE ENTREGA

Los plazos y disponibilidad ofrecidos por BENEITO FAURE son siempre aproximados y pueden estar sujetos a variaciones. Estas posibles variaciones en los plazos no supondrán la aceptación de la responsabilidad o penalizaciones por la demora por parte de BENEITO FAURE.

RECLAMACIONES

En el albarán del transportista deberá constar cualquier anomalía visible y, tras haber revisado el material, comunicar por escrito a nuestras oficinas la incidencia en las 24 horas siguientes a la recepción de la mercancía.

Superado este tiempo, la empresa no podrá hacerse cargo de la reclamación por no estar en el plazo por la agencia de transporte.

Para otro tipo de reclamaciones, deberá comunicarse por escrito a nuestras oficinas.

El producto que no funcione correctamente será repuesto por otro igual o que cumpla con las mismas características. En ningún caso nos haremos cargo de los costes de la mano de obra que se pueda originar por el mal funcionamiento de un producto de nuestro catálogo.

GARANTÍA

BENEITO FAURE garantiza que los productos que se venden se encuentran en perfecto estado. La garantía cubrirá la reparación o la reposición del producto (bajo decisión de BENEITO FAURE) y será necesario el previo envío de la incidencia por email. La garantía del producto se encuentra en el embalaje del mismo. El departamento técnico de BENEITO FAURE será el único autorizado para determinar si se trata de un defecto de fabricación, después de recibir por escrito la incidencia y la factura de venta para previa verificación. BENEITO FAURE basa el tiempo de garantía en los años desde que el producto fue comprado por el cliente, no en las horas de funcionamiento de éste.

La GARANTÍA no se cubrirá:

1. Si el producto ha sido previamente manipulado.
2. No se encuentra instalado según las instrucciones.
3. Si la ventilación del cuál no es la adecuada.
4. Problemas de pago parcial o en su totalidad por parte del cliente.

JURISDICCIÓN

En cualquier discrepancia o disputa, ambas partes se someterán a la jurisdicción de los Jueces y tribunales de Barcelona.

Alphabetical Index (Name - Page)

Adn G4	685	Bora recessed 8,5W	440	Casambi mag. track control	407
Air switch	527	Bora surface 4,5W	442	Central corner connector	409
Alfa	321	Bora surface 8,5W	442	Circus	113
Alp 48V	399	Bora suspension	421	Clos 16W	561
Alp surface	444	Bora suspension recessed	439	Clos 16W base 30cm	562
Alp suspension	430	Bora suspension surface	439	Clos 16W base 60cm	563
Alp suspension 48V	399	Bora XL suspension	422	Clos 8W	561
AR111 15° G53	675	BOX 10	181	Clos 8W base 30cm	562
AR111 15° GU10	675	BOX 11	195	Clos 8W base 60cm	563
Argo	475	BOX 12	192	Comet	565
Argo flat	475	BOX 13	191	Compac round	531
Argo large	475	BOX 14	186	Compac square	531
Aria 30W E27/E40	706	BOX 15	167	Concord dimmable	469
Aria 50W E27/E40	706	BOX 16	166	Control Basic	282
Ark recessed	453	BOX 17	171	Control Casambi	285
Ark surface	453	BOX 18	169	Control Casambi	286
Artis round	603	BOX 19	180	Control Dali Push	288
Artis square	603	BOX 21	202	Control Dali Push Triac	288
Aston	313	BOX 22	200	Control DMX	287
Atmos 25	448	BOX 23	172	Control Driver RF / Push	289
Atmos 25 GU10	450	BOX 24	189	Control PMW / RF	286
Atmos 45	448	BOX 27	203	Control Push / Triac	288
Atmos 45 GU10	450	BOX 28	197	Control SPI	287
Atmos slim 25	447	BOX 29	208	Control Top	282
Atmos slim 45	447	BOX 30 12mm	209	Control Tuya	283
Atmos track	550	BOX 30 20mm	209	Converse lighting	515
Atom	379	BOX 33	201	Cookie 48V	391
Avant round	655	BOX 35	176	Cookie suspension	437
Avant square	655	BOX 37	179	Cookie suspension 48V	391
Avant surface round	655	BOX 38	177	Cookie three phase track	329
Bag	507	BOX 39	196	Crown base	309
Basculante	669	BOX 53	173	Crown track	309
Bathroom	665	BOX 60	187	Cup 45W E27/E40	707
Beam	491	BOX 65	205	Curve line 48V	388
Bimba	509	BOX 67	207	Curve magnet track surf.	409
Bit	551	BOX 68	175	Curve track end cap	409
Blaber line	151	BOX 71	190	Curve tram 48V	388
Blaber round	155	BOX 73	193	Dau	105
Blaber square	153	BOX 75	182	Dau E	106
Blaber triangular	157	BOX 95	183	Diro	405
Blis rectangular	585	BOX 98 railing	199	Dis	592
Blis round	585	BOX 99	185	Dole GU10	676
Blis square	585	Caddie	615	Dot 48V	395
Bonn	337	Cala 10W G24	690	Dual	77
Bora 48V	397	Cala 9W G24	690	Eclipse	667
Bora 48V suspension	397	Cam 110	567	Egna	647
Bora recessed 4,5W	440	Cam 60	567	End cap	331

End cap	553	FINE 96	230	Joint track spacing surface	331
End cap recessed	409	FINE DMX-4	264	Joint track without spacing	331
End cap surface	409	FINE DMX-5	265	Kaa	135
Esférica 5,5W dimmable	694	FINE running	259	Kaa line	137
Esférica 5W E14/E27	694	FINE SPI-2	260	Kom 20W	317
Esférica 7W E14/E27	694	FINE SPI-3	261	Kom 30W	317
Evo	43	FINE SPI-4	263	Kom 40W	317
Evo dual	47	Fix	611	Konic dimmable	315
Evo E	53	Flama dimmable E14	700	Kora round 20W	519
Evo fly	45	Flama E14/E27	700	Kora round 25W	519
Evo mini	49	Flash	141	Kora square 20W	520
Evo R	50	Flexible joint track	331	Kora square 25W	520
Evo track	51	Forest	79	Krion 300W	633
Fade	617	Frame 1m	552	Krion 400W	633
Fijo	671	Frame 2m	552	Kubo	85
Filter	93	Frame 3m	552	Kubo E	86
FINE 25	268	Front base	418	L Joint ceiling	553
Fine 25 circle 48V	406	Gadir	577	L Joint ceiling recessed	409
FINE 31	225	Gam	641	L Joint ceiling surface	409
FINE 32 N	237	Globo 10W E27	698	L Joint track recessed	333
FINE 36	244	Globo 10W E27 dimmable	698	L Joint track surface	331
FINE 41	223	Globo 15W E27	699	L Joint wall ceiling	553
FINE 42	245	Globo 16W E27	699	L Joint wall ceiling recessed	409
FINE 43	251	Globo 22W E27	699	L Joint wall ceiling surface	409
FINE 44	239	Golf 200mm	376	Lao	497
FINE 45	257	Golf 400mm	376	Led strips accessories	292
FINE 46	249	Golf 600mm	377	Lek round	583
FINE 47	254	Golf 800mm	377	Lek square	583
FINE 48	217	Grip	99	Lena	311
FINE 49	235	Grow	502	Lievo suspension	433
FINE 50	252	Hat 48V	401	Lievo switch	513
FINE 51	236	Hat recessed	455	Lievo XL suspension	434
FINE 52	229	Hat surface	455	Line 48V 15W	387
FINE 54	247	Hook GU10	681	Line 48V 30W	387
FINE 55	233	Hook GU10 dimmable	681	Line 48V 7,5W	387
FINE 56	232	Horizon	139	Lineal 13W R7S	693
FINE 61	227	HQI tubular E27	691	Lineal 9W R7S	693
FINE 63	243	HQI tubular G12	691	Lineal 11W R7S dimmable	693
FINE 64	216	HQI tubular RX7S	691	Lineal 5W R7S	692
FINE 66	253	Ice 10	549	Lineal 9W R7S	692
FINE 69	221	Ice 5	549	Lineal 9W R7S dimmable	692
FINE 70	272	Icon 12W	483	Linear joint	553
FINE 71	255	Icon 7W	483	Linear joint recessed	409
FINE 72	276	Ilo	501	Linear joint surface	409
FINE 74	278	Ina	592	Lonja	301
FINE 76	231	Iris	649	Luk round IP20	663
FINE 84	219	Joint track spacing recessed	333	Luk round IP65	663

Alphabetical Index (Name - Page)

Luk square IP65	663	Neo XL sensor	570	Power Supplies Dali-2	291
Luky	597	Nexus	76	Power Supp.Dali-2 / Push	291
Luminaires accessories	158	Nik	607	Pow.S. Dali-2 DT-8/Dim-CCT	291
Lynk G53	677	Nitro GU10	676	Power Supplies Slim	290
Lynk GU10	677	Nix	591	Power Supplies Standard	290
Lynk GU10 dimmable	677	Noa 80W E27/E40	713	Power Supplies Top	290
Mac 30	555	Noa 85W E27/E40	713	Power Supplies Triac	291
Mac 60	555	Noi dimmable	529	Prisma E14	688
Mac wall 120mm	477	Noi switch	529	Proa	644
Mac wall 180mm	477	Nox	335	Pulcom asymmetric trim	348
Mac wall 250mm	477	Nyneto	101	Pulcom led	348
Mac wall base	557	Obo 19W E27	708	Pulcom round	345
Madi	637	Obo 27W E27	708	Pulcom round asymmetric	346
Magnet track accesories	408	Obo 36W E27/E40	709	Pulcom square	345
Magnet track recessed	409	Obo 45W E27/E40	709	Pulcom square asymmetric	346
Magnet track surface	409	Oma	495	Pulcom surface accessory	350
Max BA15d	678	One recessed	657	Pulcom trim	348
Micro globo 6W E27	698	One surface	657	Pulsar	355
Micro zoom	375	One wall	479	Pulsar asymmetric trim	356
Micro zoom large	375	One wall dual	479	Pulsar matt gold trim	356
Mini comet	565	Optic	591	Pulsar surface accessory	356
Mini concord dimmable	470	Outdoor track	553	Pulsar switch	355
Mini oxo round 1	367	Oxo round dimmable	365	Pun	499
Mini oxo square 1	367	Oxo square dimmable	365	Pure	493
Mini oxo square 2	369	Par 30 E27	704	PVC trim	409
Mini oxo square 4	369	Par 38 3.000K E27	704	R-39 E14	702
Mini oxo square 6	369	Par 38 Green E27	704	R-50 E14	702
Mini rubyc	466	Piccolo AR111 base	326	R-63 E27	702
Mini rubyc dimmable	466	Piccolo AR111 track	326	R-63 s-line GU10	701
Minimus	103	Piccolo base	323	R-80 E27	703
Mirror	89	Piccolo GU10 base	324	R-90 2.200K E27	703
Mis round switch	599	Piccolo GU10 track V3	324	R-90 3.000K E27	703
Mis square switch	600	Piccolo track	323	RF Control for Tuya	283
Motion Sensor	289	Pl T40 E27	689	Rok	661
Nano alp suspension	429	Plus	473	Rubyc	465
Nano oxo round	372	Polaris 100W	631	Rubyc dimmable	465
Nano oxo square	372	Polaris 150W	631	Sair 10W	613
Nano pulsar round	358	Polaris 200W	631	Sair 20W	613
Nano pulsar r. gold trim	360	Polo	595	Selen	587
Nano pulsar round surface	362	Popa 100	643	Shop E14	688
Nano pulsar square	358	Popa 60	643	Side base	416
Nano pulsar s. gold trim	360	Port	502	Sigma 17W	573
Nano pulsar square surface	362	Power GU10	679	Sigma 3W	573
Narrow GU10 dimmable	683	Power GU10 dimmable	679	Signal	575
Neo	569	Power MR16	679	Sil E27	705
Neo sensor	570	Power Supplies 48V	408	Skin	501
Neo XL	569	Power Supplies Basic	290	Sky 100W	629

Sky 10W	628	Tax	91	Uniform-line long G4	686
Sky 150W	629	Thessis 15W	523	Uniform-line long G9	687
Sky 200W	629	Thessis 15W dimmable	524	Uniform-line MR16	682
Sky 20W	628	Thessis 25W	523	Urban	55
Sky 30W	628	Thessis 25W dimmable	524	Urban asymmetric	64
Sky microwave sens. 10W	626	Thessis 35W	523	Urban E	56
Sky microwave sens. 30W	626	Three phase adapter	331	Urban fly	60
Sky microwave sens. 50W	626	Three phase recessed base	333	Urban market	70
Sky switch 10W	623	Three phase surface base	331	Urban track	68
Sky switch 20W	623	Three phase track recessed	333	Urban train	58
Sky switch 30W	624	Three phase track surface	331	Urban wall sensor	62
Sky switch 40W	624	Time	73	Urban work	61
Sky with spike	621	Time E	74	Visor	609
Smile 20W E27	712	Time track	83	Visor solar	651
Smile 40W E27	712	Time wall sensor	81	Volt round 1	457
Smile 60W E40	712	Tot 40W	463	Volt round 1 GU10	460
Sono 40W	303	Tot 60W	463	Volt round 3	458
Sono 60W	303	Track ceiling recessed	333	Volt round 3 GU10	461
Sphere 48V	389	Track ceiling surface	331	Volt round 48V	403
Sphere alp wall	487	Track power sup. recessed	333	Volt square 1	457
Sphere suspension 48V	389	Track power sup. surface	331	Volt square 1 GU10	460
Sphere wall	487	Tram 20W	319	Volt square 3	458
Square	109	Tram 30W	319	Volt square 3 GU10	461
Standard 10W dimmable	697	Tram 48V 4,5W	385	Volt square 48V	403
Standard 12W	696	Tram 48V 9W	385	Waterproof silicone cover	553
Standard 12W dimmable	697	Tram recessed 10	340	Wech	635
Standard 15W	696	Tram recessed 2	339	X Joint track recessed	333
Standard 17W dimmable	697	Tram recessed 5	339	X Joint track surface	331
Standard 6W E27	695	Tram recessed 15	340	Zas round	619
Standard 9W E27	695	Triton	143	Zas square	619
Start connector	409	Triton down	147	Zero design	126
Stem	505	Tron	485	Zero direct	123
Steps	502	Tubi	95	Zero dual	133
Sunset round	579	Tubi wall	97	Zero in	111
Sunset square	579	Tundra	115	Zero out	117
Sunset XL	581	Tura 30	559	Zero XL	119
Sunset XL dual	581	Tura 60	559	Zibor	589
Suspension kit	331	Tutto GU10	684	Zio recessed	659
Suspension kit	409	Tutto MR11	684	Zio surface	659
Sweet usb-a	489	Tween recessed	605	Zio wall	481
Sweet usb-c	489	Tween surface	605	Zio wall dual	481
System GU10	680	Ufo 300W	545	Zoe 48V	400
System GU10 dimmable	680	Ufo Lens Dali	538 - 539	Zoe recessed	445
System MR16	680	Ufo Lens switch	534 - 535	Zoe surface	445
T Joint track recessed	333	Uniform-line G4	686	Zoe suspension	425
T Joint track surface	331	Uniform-line G9	687	Zoe XL suspension	426
Tao	343	Uniform-line GU10	682	Zoom	305

Numerical Index (Code - Page)

3364	331	3521	699	3754	567	3919	709
3365	331	3522	699	3757	577	3920	709
3366	331	3523	699	3758	577	3921	709
3367	331	3524	698	3795	331	3922	709
3368	331	3525	698	3796	331	3923	709
3369	331	3526	698	3805	333	3924	709
3370	331	3527	697	3851	333	3925	712
3372	331	3528	697	3852	333	3926	712
3373	331	3529	697	3854	706	3927	712
3438	679	3530	697	3855	706	3929	609
3441	679	3531	644	3856	706	3931	609
3442	679	3532	644	3857	706	3942	343
3443	679	3534	700	3858	706	3943	343
3444	684	3569	678	3859	706	3944	343
3445	684	3570	691	3860	706	3945	343
3446	684	3571	691	3861	706	3948	531
3447	684	3579	704	3881	698	3949	531
3448	684	3580	617	3882	643	3950	531
3449	684	3581	615	3883	643	3951	531
3450	688	3582	570	3884	643	3952	531
3452	677	3583	570	3885	643	3953	531
3453	677	3584	570	3886	570	3955	629
3454	677	3585	570	3887	570	3956	629
3455	677	3586	567	3888	570	3957	629
3456	677	3587	647	3889	570	3965	713
3457	677	3589	577	3890	569	3972	545
3458	331	3590	567	3891	569	3983	583
3459	331	3592	647	3892	569	3984	583
3464	677	3593	577	3893	569	3985	583
3465	677	3614	331	3897	333	3986	583
3466	677	3615	331	3898	333	3987	583
3467	676	3616	331	3900	713	3988	583
3468	676	3617	331	3901	713	3995	595
3469	676	3618	331	3902	713	3996	595
3470	676	3619	331	3903	713	3997	595
3477	693	3620	331	3904	693	3998	595
3478	693	3621	331	3905	693	3999	597
3485	529	3622	331	3906	693	4000	597
3486	529	3623	331	3909	708	4001	597
3489	679	3625	331	3910	708	4002	597
3490	679	3747	569	3911	709	4003	701
3491	679	3748	569	3912	709	4023	681
3496	649	3749	569	3913	712	4024	681
3497	649	3750	569	3914	712	4025	681
3518	699	3751	567	3915	712	4038	321
3519	699	3752	567	3917	708	4039	321
3520	699	3753	567	3918	708	4040	321

4049	324	4290	575	4410	362	4512	633
4050	324	4291	607	4411	362	4513	631
4096	337	4292	607	4412	362	4514	631
4097	337	4295	679	4413	362	4515	631
4098	337	4296	679	4427	319	4516	631
4099	337	4297	358	4428	319	4517	631
4106	502	4298	358	4429	319	4518	631
4107	502	4299	358	4430	319	4519	631
4108	501	4300	358	4433	326	4520	631
4109	501	4301	358	4435	326	4521	631
4110	502	4302	358	4437	323	4522	473
4111	502	4303	583	4438	323	4523	473
4112	502	4304	583	4439	313	4541	319
4113	502	4308	626	4440	313	4542	319
4126	501	4309	626	4444	317	4543	319
4127	501	4310	626	4445	317	4544	319
4134	619	4311	626	4447	317	4549	372
4135	573	4312	583	4448	317	4550	372
4137	703	4331	591	4451	358	4551	372
4175	489	4333	466	4452	358	4552	372
4176	321	4337	317	4453	358	4573	397
4177	321	4339	317	4454	358	4574	397
4178	321	4340	621	4455	358	4575	397
4193	651	4341	621	4456	358	4576	397
4194	651	4349	626	4461	448	4577	397
4209	651	4350	626	4462	448	4578	397
4217	355	4351	626	4463	448	4579	397
4218	355	4352	626	4464	448	4580	397
4227	682	4353	626	4465	450	4581	397
4228	682	4354	626	4466	450	4582	397
4229	682	4355	626	4467	450	4583	397
4236	523	4356	626	4468	450	4584	397
4243	694	4362	331	4476	659	4585	397
4244	694	4363	331	4477	659	4586	397
4245	694	4364	331	4478	657	4587	397
4246	694	4365	331	4479	657	4588	397
4247	694	4367	592	4480	657	4589	440
4248	694	4368	592	4481	657	4590	440
4249	694	4369	591	4482	659	4591	440
4250	694	4383	483	4483	659	4592	440
4251	573	4384	483	4484	655	4593	440
4254	628	4385	483	4485	655	4594	440
4257	628	4386	483	4486	655	4595	440
4266	628	4387	483	4487	655	4596	440
4276	628	4388	483	4509	633	4597	440
4279	628	4401	628	4510	633	4598	440
4280	628	4402	628	4511	633	4599	440

Numerical Index (Code - Page)

4600	440	4648	409	4710	567	4781	385
4601	440	4649	409	4711	408	4782	385
4602	440	4650	409	4731	339	4783	385
4603	440	4651	409	4732	339	4784	387
4604	440	4652	409	4733	339	4785	387
4605	439	4653	409	4734	339	4786	387
4606	439	4654	409	4735	340	4787	399
4607	439	4655	409	4736	340	4788	399
4608	439	4657	409	4737	340	4789	399
4609	439	4658	409	4738	340	4790	399
4610	439	4659	409	4742	345	4791	399
4611	439	4660	409	4743	346	4792	399
4612	439	4661	409	4744	345	4793	399
4613	439	4662	409	4745	346	4794	399
4614	439	4663	409	4746	345	4795	400
4615	439	4664	409	4747	346	4796	400
4616	439	4665	409	4748	345	4797	400
4617	439	4666	409	4749	346	4798	400
4618	439	4667	587	4750	447	4799	445
4619	439	4668	587	4751	447	4800	445
4621	442	4669	589	4752	447	4801	445
4622	442	4670	589	4753	333	4802	445
4623	442	4671	683	4754	333	4803	445
4624	442	4672	683	4755	661	4804	445
4625	442	4677	699	4756	661	4805	445
4626	442	4678	699	4757	661	4806	445
4627	442	4679	623	4758	663	4807	409
4628	442	4680	623	4759	663	4808	453
4629	442	4681	623	4761	348	4809	453
4630	442	4682	623	4762	348	4810	453
4631	442	4683	623	4763	348	4811	453
4632	442	4684	623	4764	348	4812	453
4633	442	4685	624	4766	523	4813	453
4634	442	4686	624	4767	524	4814	453
4635	442	4687	624	4768	395	4815	453
4636	442	4688	624	4769	395	4816	453
4637	409	4689	624	4770	395	4817	453
4638	409	4690	619	4771	395	4818	453
4639	409	4691	524	4772	391	4819	453
4640	409	4692	619	4773	391	4820	611
4641	409	4693	619	4774	391	4821	348
4642	409	4694	624	4775	391	4822	348
4643	409	4700	331	4776	385	4823	348
4644	409	4701	331	4777	385	4824	348
4645	409	4707	408	4778	385	4825	348
4646	409	4708	408	4779	385	4826	348
4647	409	4709	567	4780	385	4827	587

4828	587	4892	563	4957	585	5005	635
4829	589	4893	563	4958	585	5006	479
4830	589	4894	613	4959	585	5007	479
4831	520	4895	613	4960	585	5008	479
4832	519	4896	613	4961	585	5009	479
4833	323	4897	613	4962	585	5010	479
4834	323	4898	613	4963	333	5011	479
4837	555	4899	613	4964	333	5012	481
4838	555	4900	305	4965	333	5013	481
4839	555	4901	305	4966	333	5014	481
4840	555	4902	463	4967	333	5015	481
4841	555	4903	463	4968	333	5016	481
4842	555	4904	463	4969	333	5017	481
4843	555	4905	463	4970	333	5018	527
4844	555	4906	583	4971	333	5019	529
4845	555	4907	583	4972	333	5020	599
4846	555	4908	583	4973	333	5021	599
4847	555	4909	583	4974	333	5022	599
4848	555	4910	583	4975	333	5023	600
4849	559	4911	583	4976	333	5024	600
4850	559	4912	583	4977	333	5025	600
4851	559	4913	583	4978	333	5026	356
4852	559	4914	583	4979	505	5027	497
4853	559	4915	538	4981	505	5028	603
4854	559	4916	538	4982	585	5029	499
4855	559	4917	538	4983	585	5030	523
4856	559	4918	538	4984	585	5034	350
4857	559	4919	539	4985	315	5035	350
4858	559	4920	539	4986	315	5036	350
4859	559	4921	539	4987	523	5037	403
4860	559	4922	619	4988	523	5038	403
4876	561	4923	615	4989	579	5039	403
4877	561	4924	617	4990	579	5040	403
4878	561	4930	447	4991	579	5041	457
4879	561	4931	447	4992	579	5042	457
4880	561	4932	447	4993	579	5043	457
4881	561	4933	655	4994	579	5044	457
4882	562	4934	655	4995	477	5045	458
4883	562	4935	348	4996	477	5046	458
4884	562	4946	303	4997	477	5047	458
4885	563	4947	303	4998	477	5048	458
4886	563	4950	303	4999	477	5049	460
4887	563	4951	303	5000	477	5050	460
4888	562	4952	448	5001	477	5051	460
4889	562	4953	448	5002	477	5052	460
4890	562	4954	450	5003	477	5053	461
4891	563	4955	450	5004	635	5054	461

Numerical Index (Code - Page)

5055	461	5148	534	5219	477	5285	376
5056	461	5149	535	5220	477	5286	376
5057	355	5150	535	5221	309	5287	376
5058	355	5154	637	5222	309	5288	376
5059	356	5155	489	5224	309	5289	376
5060	356	5156	489	5225	309	5290	376
5061	367	5157	491	5238	405	5291	376
5062	367	5158	491	5239	405	5292	376
5063	369	5159	493	5246	475	5293	376
5064	369	5160	493	5247	475	5294	376
5065	369	5178	641	5248	475	5295	376
5066	369	5179	329	5249	475	5296	376
5067	369	5180	329	5250	475	5297	377
5068	369	5181	391	5251	475	5298	377
5069	465	5182	391	5252	475	5299	377
5070	465	5183	437	5253	475	5300	377
5071	469	5184	437	5254	475	5301	377
5072	469	5185	391	5255	475	5302	377
5073	565	5186	391	5256	475	5303	377
5074	565	5187	675	5257	475	5304	377
5075	565	5188	675	5258	475	5305	377
5076	565	5189	675	5259	475	5306	377
5084	421	5190	675	5260	475	5307	377
5085	421	5191	675	5261	475	5308	377
5086	422	5192	675	5262	475	5309	388
5087	422	5196	605	5263	475	5310	388
5088	433	5197	605	5264	557	5311	388
5089	433	5198	605	5265	557	5312	388
5090	434	5199	605	5266	557	5313	388
5091	434	5200	605	5267	379	5314	388
5092	425	5201	605	5268	379	5315	388
5093	425	5202	387	5269	379	5316	388
5094	426	5203	387	5270	379	5317	409
5095	426	5204	387	5271	379	5319	409
5096	429	5205	603	5272	379	5325	509
5097	429	5207	356	5273	375	5326	509
5098	430	5208	360	5274	375	5327	509
5099	430	5209	360	5275	375	5328	509
5108	367	5210	360	5276	375	5329	507
5109	367	5211	360	5277	375	5330	507
5110	356	5212	356	5278	375	5331	507
5111	356	5213	356	5279	375	5332	507
5112	565	5214	663	5280	375	5333	487
5113	565	5215	663	5281	375	5334	487
5139	408	5216	663	5282	375	5336	487
5140	408	5217	663	5283	375	5337	487
5147	534	5218	477	5284	375	5339	487

5340	487	5401	552	16121	166	24758	291
5342	487	5402	552	16122	166	25247	268
5343	487	5403	552	17119	171	25277	268
5345	455	5404	552	17121	171	25307	268
5346	455	5405	552	17122	171	25367	268
5348	455	5406	553	18119	169	25407	268
5349	455	5407	553	18121	169	25467	268
5351	455	5408	553	18122	169	27119	203
5352	455	5409	553	19119	180	27121	203
5354	455	5410	553	19121	180	27122	203
5355	455	5411	553	19122	180	28119	197
5357	444	5412	553	21119	202	29119	208
5358	444	5413	553	21121	202	30129	209
5360	444	5414	553	22119	200	30209	209
5361	444	5415	553	22122	200	31220	225
5363	401	5416	553	22410	290	31227	225
5364	401	5417	553	22415	290	31270	225
5366	401	5418	553	22420	290	31277	225
5367	401	5419	581	22424	290	31300	225
5369	389	5420	581	22430	290	31307	225
5370	389	5421	581	22432	290	31400	225
5372	389	5422	581	22435	290	31407	225
5373	389	5423	581	22460	290	33119	201
5375	389	5424	581	22490	288	33121	201
5376	389	5425	553	22499	288	33122	201
5378	389	5426	553	22570	283	35119	176
5379	389	5427	409	22726	286	35121	176
5381	495	5428	409	22726	288	35122	176
5382	495	5431	406	22799	286	36360	244
5383	495	5432	406	22821	283	37121	179
5384	549	5441	406	22856	283	38119	177
5385	549	5442	406	22911	289	38121	177
5386	549	6023	408	22948	288	38122	177
5387	549	6024	408	22974	289	39122	196
5388	549	6025	408	23119	172	41270	223
5389	549	6721	407	23121	172	41275	223
5390	549	6722	407	23122	172	41300	223
5391	549	10119	181	24108	291	41305	223
5392	550	10121	181	24109	291	41400	223
5393	550	10122	181	24119	189	41405	223
5394	550	11119	195	24121	189	41600	223
5395	550	12119	192	24122	189	41605	223
5396	551	13113	191	24159	291	42360	245
5397	551	14119	186	24208	291	42365	245
5398	551	14121	186	24308	291	43430	251
5399	551	14122	186	24309	291	44110	239
5400	552	16119	166	24609	291	44270	239

Numerical Index (Code - Page)

44370	239	56360	232	64453	291	77019	282	92473	287
44500	239	56400	232	64458	291	79430	282	92553	287
45220	257	57241	285	64803	291	80260	282	92699	287
45227	257	57242	285	64808	291	81990	282	92853	287
45310	257	57588	286	65119	205	82995	282	93470	287
45317	257	57924	286	65121	205	83475	282	93579	287
45520	257	59112	285	65122	205	84270	219	95119	183
45527	257	59121	285	66470	253	84275	219	95121	183
46460	249	59122	285	66477	253	84300	219	95122	183
46465	249	59141	285	67122	207	84305	219	95153	287
47430	254	59142	285	68121	175	84400	219	95179	287
47440	254	59182	285	68122	175	84405	219	95479	287
48220	217	59189	285	69220	221	84431	288	96009	287
48270	217	59249	286	69225	221	84600	219	96307	230
48300	217	59519	286	69270	221	84605	219	96407	230
48400	217	59549	286	69275	221	85120	289	96477	230
49270	235	59629	286	69300	221	85183	289	98121	199
49300	235	59682	285	69305	221	85220	289	98122	199
49400	235	59689	285	69400	221	85263	289	99121	185
49600	235	59733	286	69405	221	85330	289	99122	185
50460	252	59739	286	69600	221	85332	289	205280	669
51270	236	59769	286	69605	221	85336	289	205284	669
51277	236	59777	286	70277	272	85360	283	205285	669
51300	236	59789	286	70307	272	85364	283	206280	671
51307	236	60119	187	70407	272	85420	289	206284	671
51400	236	60121	187	70437	272	85460	283	206285	671
51407	236	60122	187	71119	190	85470	283	222230	667
51600	236	61270	227	71121	190	85475	283	222232	667
51607	236	61275	227	71122	190	85626	289	222238	667
52270	229	61300	227	71470	255	85876	288	223232	665
52277	229	61305	227	71477	255	85884	288	223233	665
52300	229	61400	227	72277	276	85890	283	10XXXX	113
52307	229	61405	227	72307	276	85890	286	12XXXX	111
52400	229	61600	227	72407	276	85890	288	130L006	685
52407	229	61605	227	72437	276	85894	283	130L006-2	686
52600	229	62412	290	73119	193	85894	286	130L006-2F	686
52607	229	62415	290	73121	193	85894	288	130L184-5	687
53119	173	62430	290	73122	193	85990	283	130L184-5F	687
53121	173	62460	290	74277	278	85993	289	130L195-A	687
53122	173	62475	290	74307	278	85995	283	130L195-B	687
54460	247	63360	243	74407	278	86019	282	130L195-C	686
54467	247	63367	243	74437	278	87029	282	130L195-D	686
55270	233	64153	291	75119	182	88460	282	13XXXX	119
55300	233	64158	291	75121	182	89260	282	140026-C3T	692
55400	233	64270	216	75122	182	90990	282	140026-F4T	692
56270	232	64300	216	76300	231	91430	282	140L0261L	693
56300	232	64400	216	76400	231	92353	287	140L026L	693